

BAT54, BAT54A / C / S

SURFACE MOUNT SCHOTTKY BARRIER DIODE

REVERSE VOLTAGE - 30 Volts FORWARD CURRENT - 0.2 Ampere


FEATURES


- Extremely Fast Switching Speed
- Low Forward Voltage
- Very Small Conduction Losses

MECHANICAL DATA

- Case: SOT-23 Plastic
- Case Material: "Green" molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Moisture Sensitivity: Level 1 per J-STD-020D
- Lead Free in RoHS 2002/95/EC Compliant

SOT-23





SOT-23					
Dim.	Min.	Max.			
Α	2.80	3.04			
В	1.20	1.40			
С	0.89	1.11			
D	0.37	0.50			
G	1.78	2.04			
J	0.085	0.177			
K	0.35	0.69			
L	0.89 1.02				
S	2.10	2.64			
V	0.45 0.60				
Dimensions in millimeter					

Maximum Ratings & Thermal Characteristics @ T_A = 25°C unless otherwise specified

Characteri	stic	Symbol	BAT54	BAT54A	BAT54C	BAT54S	Units
Repetitive Peak Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		$egin{array}{c} V_{RRM} \ V_{RWM} \ V_{R} \end{array}$		3	0		V
Forward Continuous Current		I _{FM}		20	00		mA
Forward Surge Current	@t<1.0s	I _{FSM}	600		mA		
Power Dissipation		P _D		20	00		mW
Operating Temperature Range		TJ		1:	25		$^{\circ}\!\mathbb{C}$
Storage Temperature Range		T _{STG}		-55~	+150		$^{\circ}\mathbb{C}$

Electrical Characteristics @ T_A = 25°C unless otherwise specified


Characteristic	Test Condition	Symbol	BAT54	BAT54A	BAT54C	BAT54S	Unit
Reverse Breakdown Voltage	I _R = 100uA	V_{BR}		3	0		V
Maximum Forward Voltage	$I_F = 0.1 \text{mA}$ $I_F = 1 \text{mA}$ $I_F = 10 \text{mA}$ $I_F = 30 \text{mA}$ $I_F = 100 \text{mA}$	V _F		3: 4(5(40 20 00 00 00		mV
Maximum DC Reverse Current at Rated DC Blocking Voltage	V _R = 25V	I _R		:	2		uA
Typical Diode Capacitance	V _R =1.0V,f=1MHz	C _D		1	0		pF
Reverse Recovery time	Irr=1mA, IR=IF=10mA RL=100Ω	trr			5		nS

REV. 4, Jan-2013, KSHR21

RATING AND CHARACTERISTIC CURVES

BAT54, BAT54A / C / S



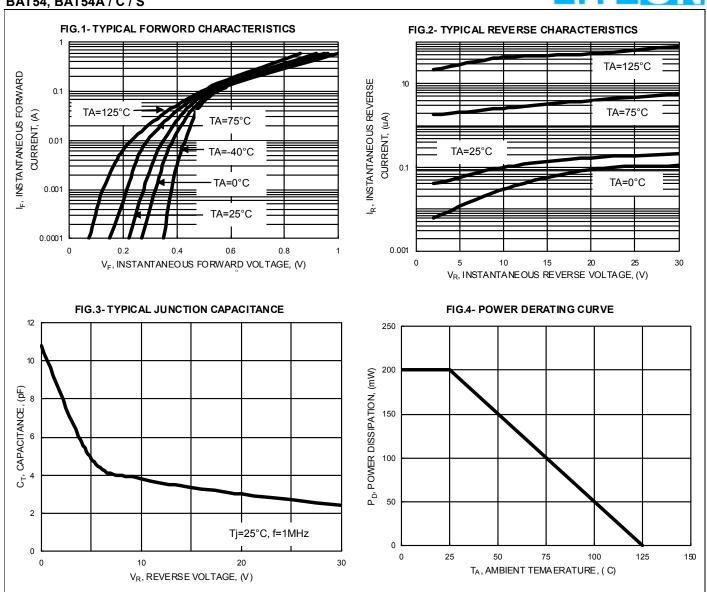

Device Marking:

Device P/N	Marking	Equivalent Circuit Diagram
BAT54	JV3	3 0
BAT54A	В6	3 0 0 1
BAT54C	5C	3 0 0 1
BAT54S	LD3	3 0



Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.


LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.



New Marking Rule Notification

Range: In order to have well management in process control, the new marking rule is applied to small signal device including Switching Diode, Transistor and Schottky Diode.

Package: SOT-23 / SOT-323 / SOT-523

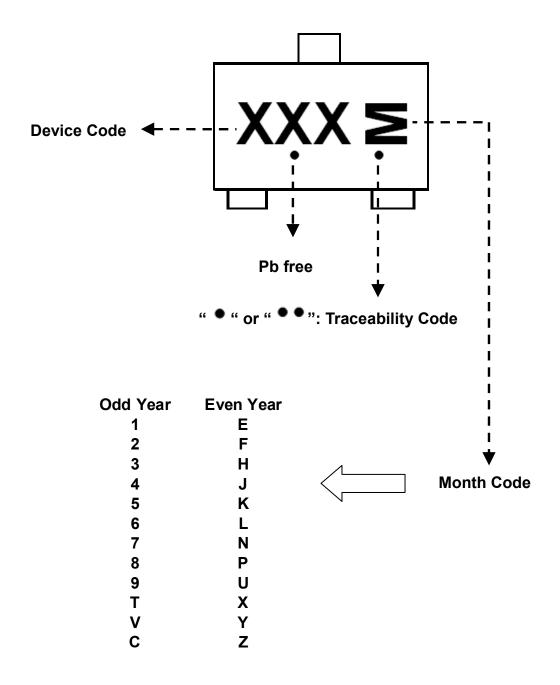

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Lite-On manufacturer:

Other Similar products are found below:

CUS06(TE85L,Q,M) MA4E2039 D1FH3-5063 MBR0530L-TP MBR10100CT-BP MBR30H100MFST1G MMBD301M3T5G PMAD1103-LF PMAD1108-LF RB160M-50TR RB520S-30 RB551V-30 DD350N18K DZ435N40K DZ600N16K BAS16E6433HTMA1 BAS 3010S-02LRH E6327 BAT 54-02LRH E6327 IDL02G65C5XUMA1 NSR05F40QNXT5G NSVR05F40NXT5G JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W SBAT54CWT1G SBM30-03-TR-E SBS818-TL-E SK32A-LTP SK33A-TP SK34A-TP SK34B-TP SMD1200PL-TP ACDBN160-HF SS3003CH-TL-E STPS30S45CW PDS3100Q-7 GA01SHT18 CRS10I30A(TE85L,QM MBR1240MFST1G MBRB30H30CT-1G BAS28E6433HTMA1 BAS 70-02L E6327 HSB123JTR-E JANTX1N5712-1 VS-STPS40L45CW-N3 DD350N12K SB007-03C-TB-E SB10015M-TL-E SB1003M3-TL-E SK110-LTP