




203 Series Fuse

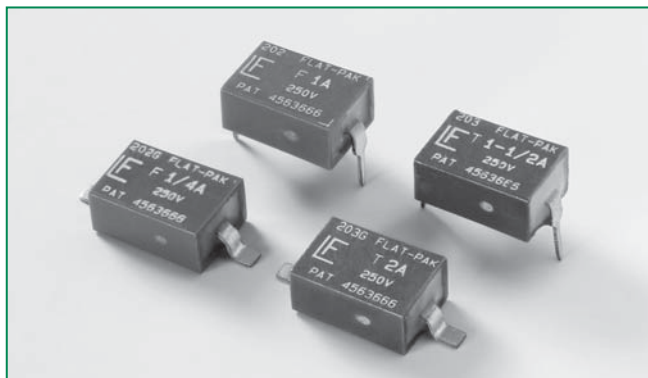

Description

Fast-Acting and Slo-Blo® Fuse versions of the Flat-Pak Fuse designs are available. Both designs are available in either a gull-wing surface mount package or a DIP configuration for through-hole mounting. These fuse designs feature a 250 VAC rating in a low profile, rectangular package.



Agency Approvals

| AGENCY | AGENCY FILE NUMBER | AMPERE RANGE |
|---|--------------------|--------------|
|  | E10480 | 1/4mA - 5A |
|  | LR29862 | 1/4mA - 5A |

Electrical Characteristics for Series


| % of Ampere Rating | Opening Time |
|--------------------|--------------------------------|
| 100% | 4 hours, Minimum |
| 200% | 1 second, Min; 30 seconds Max. |

Electrical Specifications by Item

| Ampere Rating (A) | Amp Code | Max Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I ² t (A ² sec) | Agency Approvals | |
|-------------------|----------|------------------------|---------------------|--------------------------------|---|---|---|
| | | | | | |  |  |
| 0.25 | .250 | 250 | 50 amperes @250 VAC | 1.36 | 0.0126 | x | x |
| 0.50 | .500 | 250 | | 0.433 | 0.112 | x | x |
| 0.75 | .750 | 250 | | 0.158 | 0.327 | x | x |
| 1.00 | 001. | 250 | | 0.0755 | 0.328 | x | x |
| 1.50 | 01.5 | 250 | | 0.0390 | 0.850 | x | x |
| 2.00 | 002. | 250 | | 0.0345 | 1.70 | x | x |
| 2.50 | 02.5 | 250 | | 0.0237 | 2.87 | x | x |
| 3.00 | 003. | 250 | | 0.0197 | 4.40 | x | x |
| 4.00 | 004. | 250 | | 0.0148 | 8.75 | x | x |
| 5.00 | 005. | 250 | | 0.0124 | 14.7 | x | x |

203 Series


Temperature Derating Curve

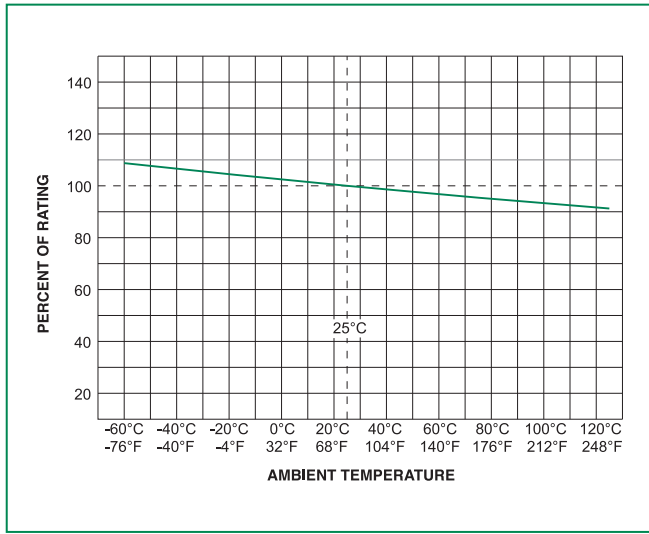

Note:

1. Derating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Average Time Current Curves

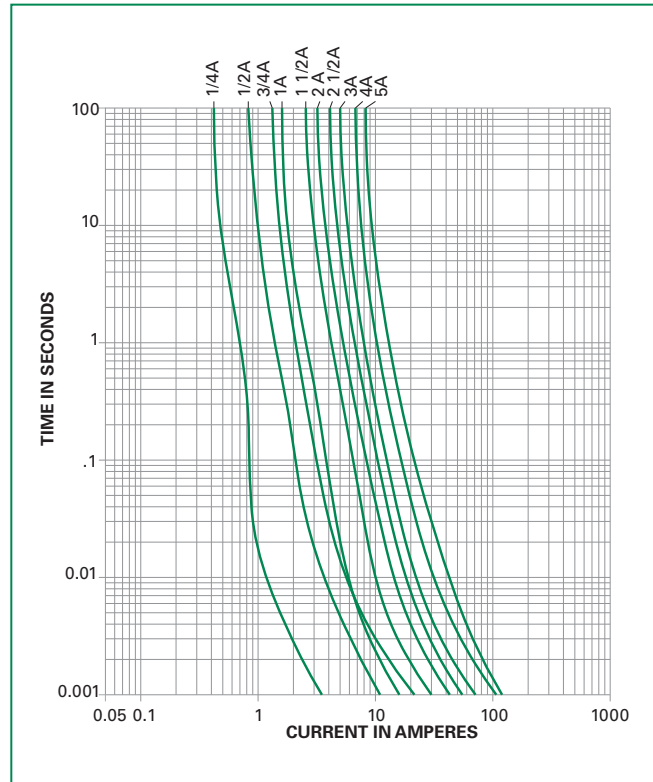

Soldering Parameters


| | |
|------------------|------------------------|
| Wave Soldering | 260°C, 3 seconds max. |
| Reflow Soldering | 215°C, 30 seconds max. |

Product Characteristics


| | |
|----------------------|---|
| Materials | Body: Thermoplastic Terminations: Tin/Lead Plated Copper |
| Solderability | MIL-STD-202, Method 208 |

| | |
|------------------------------|--|
| Cleaning | Board washable in most common solvents |
| Operating Temperature | -55°C to 125°C |

Dimensions

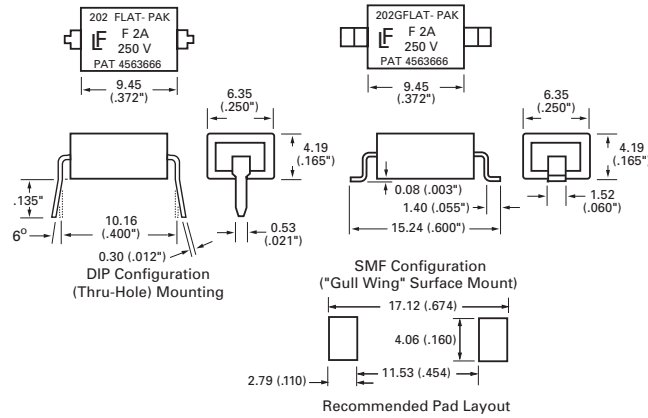

Part Numbering System

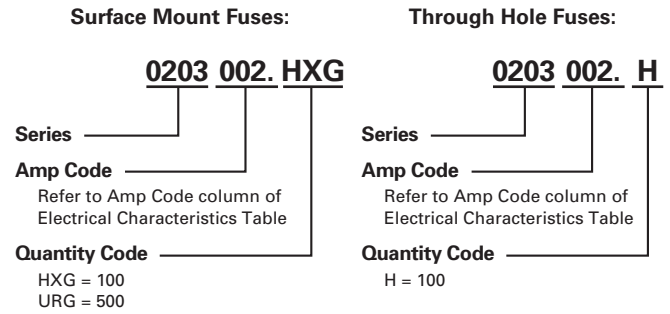

203 Series

Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code |
|----------------------------|--------------------------------|----------|---------------------------|
| Surface Mount Fuses | | | |
| Bulk | - | 100 | HXG |
| 24mm Tape and Reel | EIA RS-481-2 (IEC 286, part 3) | 500 | URG |
| Through Hole Fuses | | | |
| Antistatic Magazine | - | 100 | H |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [FT600-0500-2](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [TF16SN3.15TTD](#) [41921000000](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#) [TR-3216FF4-R](#) [SST 1-1K](#) [SST 5 -1K](#) [SST 2-1K](#) [TR2-TCP500-R](#) [F60C500V12AS](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [FCC16202ABTP](#) [3-122-714](#) [3-122-720](#) [3-122-718](#) [3-122-712](#) [3-122-716](#) [03081.25UR](#) [CQ06LF 5A 32V](#) [CQ06LT 5A 32V](#) [SET 2A 125V \(G\)](#) [SET 1A 125V \(G\)](#) [SEF 10A 125V \(G\)](#) [SEF 3A 125V \(G\)](#) [SEF 4A 125V \(G\)](#) [SEF 6A 125V \(G\)](#) [SEF 7A 125V \(G\)](#) [SET 4A 125V \(G\)](#) [SET 3A 125V \(G\)](#) [SET 5A 125V \(G\)](#) [SET 7A 125V \(G\)](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [0154002.DRL](#) [0154008.DRL](#)