

FUSES

SUBMINIATURE

PICO II® Fast-Acting Type

ELECTRICAL CHARACTERISTICS:

RATING	AMPERAGE	BLOW TIME
100%	1/16—15	4 hours, minimum
200%	1/16—10	5 seconds, maximum
200%	12—15	10 seconds, maximum

APPROVALS: Recognized under the Components Program of Underwriters Laboratories through 10 amperes.



COLOR CODING: PICO II® Fuses are color-coded per IEC (International Electrotechnical Commission) Standards Publication 127. The first three bands indicate current rating in milliamperes. The fourth and wider band designates the time-current characteristics of the fuse (red is fast-acting). Fuses are also available without color coding. The Littelfuse manufacturing symbol and ampere rating are marked on the fuse body.

FUSES TO MIL SPEC: See Military Section.

255 000 Series — Axial Leads



256 000 Series — Radial Leads

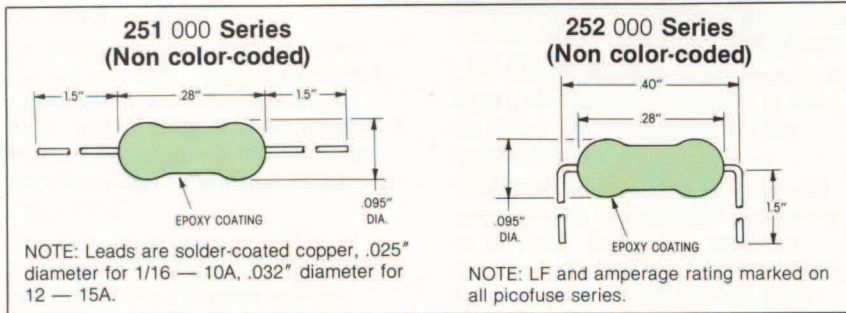

NOTE: To order non color-coded picofuses, use **251 Series** (for Axial leads) or **252 Series** (for Radial leads) in part number table below.



PART NUMBER		AMPERE RATING	FIRST SIGNIFICANT FIGURE	SECOND SIGNIFICANT FIGURE	MULTIPLIER	TIME-CURRENT CHARACTERISTIC (Wide Band)	VOLTAGE RATING
AXIAL LEADS	RADIAL LEADS						
255.062	256.062	1/16	Blue	Red	Black	Red	125
255.125	256.125	1/8	Brown	Red	Brown	Red	125
255.250	256.250	1/4	Red	Green	Brown	Red	125
255.375	256.375	3/8	Orange	Violet	Brown	Red	125
255.500	256.500	1/2	Green	Black	Brown	Red	125
255.750	256.750	3/4	Violet	Green	Brown	Red	125
255.001	256.001	1	Brown	Black	Red	Red	125
255.01.5	256.01.5	1-1/2	Brown	Green	Red	Red	125
255.002	256.002	2	Red	Black	Red	Red	125
255.02.5	256.02.5	2-1/2	Red	Green	Red	Red	125
255.003	256.003	3	Orange	Black	Red	Red	125
255.03.5	256.03.5	3-1/2	Orange	Green	Red	Red	125
255.004	256.004	4	Yellow	Black	Red	Red	125
255.005	256.005	5	Green	Black	Red	Red	125
255.007	256.007	7	Violet	Black	Red	Red	125
255.010	256.010	10	Brown	Black	Orange	Red	125
255.012	256.012	12	Brown	Red	Orange	Red	32
255.015	256.015	15	Brown	Green	Orange	Red	32

OPTIONS: PICO II® Fuses are available on tape for use with automatic insertion equipment . . . Contact factory.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuses with Leads \(Through Hole\)](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[89096-013](#) [89096-015](#) [A170100400](#) [BKPCH-5-R](#) [252010](#) [252.062](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [LKB-3](#) [0252001.M-0471005.MAT1L](#) [0473004.MAT1L](#) [0473.750HAT1L](#) [0471002.MAT1L](#) [0471.500MAT1L](#) [0491002.MAT1](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [BK-AGC-2-1-2-R](#) [BK-GMA-8-R](#) [BK-GMD-4-R](#) [BK-GMT-4A](#) [BK-MDL-1](#) [BK-PCD-5-R](#) [BK-C520-5-R](#) [BK-GMC-10-R](#) [BK-MDA-V-30-R](#) [BK-S500-500-R](#) [BK-SFE-20](#) [BK-GMA-1-25-R](#) [GMQ-3-2-10](#) [GLX-12](#) [PCB-34-R](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [PCF-1/2-R](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [047101.5MAT1L](#) [0471003.MAT1L](#) [GFA-12](#) [89096-005](#) [SR-5F-1-6A-BK](#)