


345 Series Shock-Safe Panel Mount Enclosed Fuse Holders



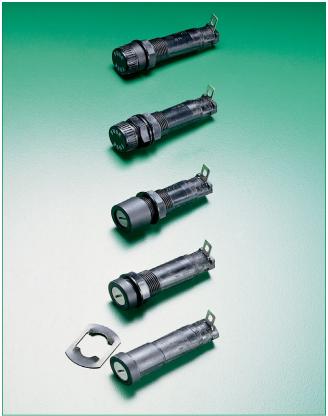

Additional Information

 $|\psi|$ Datasheet





Product Char	acteristics		
Compatible Fuses	For 3AB, 3AG, 5×20mm, or 2AG Fuses		
Description	Designed to eliminate the possibility of electrical shock, as defined in IEC standards 60127-6. The universal fuseholder body will accept 3AB, 3AG, 5 × 20mm, and 2AG fuse sizes depending on knob selected. Permits inventory reduction of bodies and provides knob interchange versatility. Anti-tease feature eliminates circuit interruption when knob is accidentally depressed. Five fuseholder types assure design flexibility. Available with two knob styles — screwdriver slot or fingergrip. Available in two terminal styles — dual-purpose for soldering or 3/16" NEMA quick connect; and ¼" NEMA/DIN quick connect. Quick fuse size identification is provided with letters on fingergrip knob and color-coded screwdriver slot knobs.		
Electrical	Insulation Resistance: 10,000 megohm minimum at 500 VDC. Contact Resistance: Less than .005 ohm average at currents up to 1 ampere.		
Mounting	Threaded styles withstand 15 inlb. mounting torque. Low profile and High profile panel thickness: .032" min./.310" max. Quick mount panel thickness: .012" min./.360" max. Rear mount panel thickness: .012" min./.260" max.		
Molded Parts	Body Material: Black glass-filled thermoplastic (UL 94V0).		
Knob Material	Grey, blue or black glass-filled thermoplastic (UL94 V-0 Hex Nut Material: Black glass-filled thermoplastic.		
Knob	Finger-Grip, Fuse Extractor type or Screwdriver Slot, Fuse Extractor type with plated copper alloy insert. Plated copper alloy contact clips. Spring loaded, locki mechanism provides an anti-tease feature and will no vibrate loose.		
Terminals	Copper alloy. Tin-plated. Three styles available. A .187" dual purpose terminal accepts wire for soldering or a Quick-Connect receptacle187" terminal for NEMA Quick-Connect and .250" terminal for NEMA/DIN Quick Connect available.		
Ambient Temperature	-40°C to +85°C.		
Hardware	Threaded style fuseholders are supplied with a thermoplastic hex nut unassembled. Quick mount style fuseholders are supplied with a push-on type retaining nut, black oxide finish, unassembled. A synthetic rubbe "O" ring will be supplied only with the screwdriver slot knob when the drip-proof version is requested. To order with a metal internal tooth lockwasher (L) and/or neoprene panel washer (N) and/or drip-proof synthetic rubber "O" ring with Neoprene washer (NP) [Screwdriver slot knob only], add the appropriate suffic (L, N, or NP) respectively (or in combination) to the catalog number. Accesories can be order by separately		

Rohs 🕫 恥 🚱 🚈

* Please refer to Fuseology section for information on proper fuseholder re-rating.


Agency Approval

Agency	Agency File Number	3AG/AB	5×20mm	2AG
91	E14721	20A 250V	20A 250V	10A 250V
SP.	7316	20A 250V	20A 250V	10A 250V
	40001642	10A 250V	10A 250V	_




Cartridge Fuse Holders Enclosed Fuseholders > Panel Mounted

Dimensions

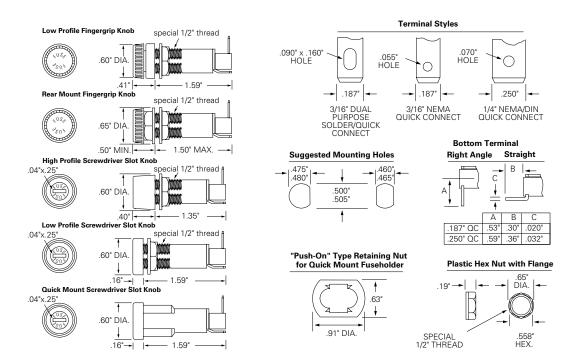

Ordering Part Numbering System to order complete fuse holder (body and knob)

Example 03453LS7HXLNP - A 345 Series fuse holder for 3AG fuses with low profile body and a Screwdriver Slot knob, with 1/4" (Rt. Angle) Nema/Din QC terminals.

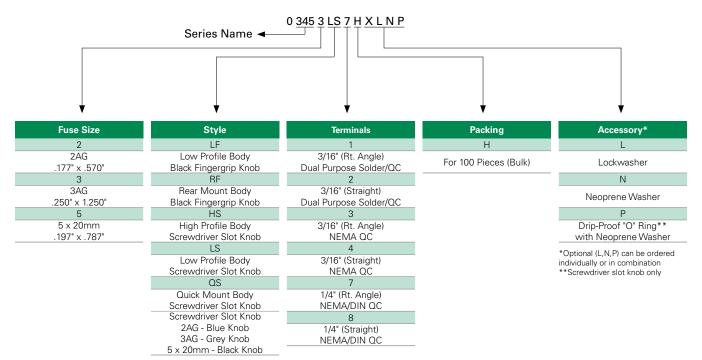

Note - If accessory is needed, add the "X" as filler on the ordering part number

To Order Body Including Nut(s) Only

Terminal Style	Bottom Terminal	Low Profile Body Part Number***	High Profile Body Part Number	Rear Mount Body Part Number	Quick Mount Body Part Number
3/16" Dual Purpose	(Rt. Angle)	03453LF1ZX010	03453HS1ZX010	03453RF1ZX010	03453QS1ZX010
3/16" Dual Purpose	(Straight)	03453LF2ZX010	03453HS2ZX010	03453RF2ZX010	03453QS2ZX010
3/16" NEMA QC	(Rt. Angle)	03453LF3ZX010	03453HS3ZX010	03453RF3ZX010	03453QS3ZX010
3/16"NEMA QC	(Straight)	03453LF4ZX010	03453HS4ZX010	03453RF4ZX010	03453QS4ZX010
1/4" NEMA/DIN QC	(Rt. Angle)	03453LF7ZX010	03453HS7ZX010	03453RF7ZX010	03453QS7ZX010
14"NEMA/DIN QC	(Straight)	03453LF8ZX010	03453HS8ZX010	03453RF8ZX010	03453QS8ZX010

***Low Profile Body will accept either Fingergrip or Screwdriver Slot Knob.

Z - 100 pieces (Bulk) X - Filler

To Order Knob Only

Fuse Size	Fingergrip Knob	Screwdriver Slot Knob
2AG	03452LF1HX020	03452LS1HX020
3AG	03453LF1HX020	03453LS1HX020
5 × 20mm	03455LF1HX020	03455LS1HX020

H - 100 Pieces (Bulk)

X - Filler

ACS O-Ring

ACS Rubber Washer

ACS Nut

ACS Lockwasher

To Order Accesories Only

Packaging

Bulk (100 pieces)

Bulk (100 pieces)

Bulk (100 pieces)

Bulk (100 pieces)

09010002H

09030097H

09050023H

09010134H

H - 100 Pieces (Bulk)

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each
product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at:
www.littelfuse.com/disclaimer-electronics.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below :

570-290-741P40 0031.1351.01 020417G 020418E 6R30A1B F30A3S 80910030 8601.2020 G15A2SPQ 9-3557-GP REV A HDJ-B R6J30A3S HFH-1 RF30A1S RF30A2B RF30A3SP BK/HHM BK/HJM-HH HTJ-LES-FUSE C4044-1 2086-1 2602 2650 178.000100 F60A2SQ T30A2B G4PB8 2660 CQ-209V HKP-CCHH R6F30A2S 341001A 345621A 348670 CVRMCC 4202 4407 4408 4413 4423 4532 4537 TSD1404-12 BPHHU HPC 55900008011 32NNL 345602-010 345603-010 345612