
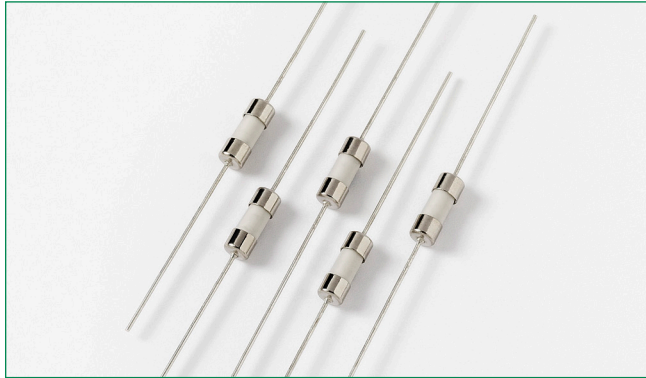


**876 Series Fuse, Lead-free 3.6x10 mm, Fast-Acting Fuse**



**Description**

The 876 Series is a single pigtail, axial leaded, 3.6 x10mm, fast-acting fuse

**Features**

- Designed to meet IEC 60127-3 Standard Sheet 3
- Single Pigtail Axial Lead format
- Fast-Acting, ceramic body fuse in a compact package
- Pb-free, RoHS compliant
- Available in ratings of .125 to 5 Amperes

**Agency Approvals**

| Agency | Agency File Number | Ampere Range        |
|--------|--------------------|---------------------|
|        | 40022494           | 0.125A, 0.630A - 5A |
|        | E10480             | 0.125A - 5A         |
|        | NBK240212-JP1021   | 1.6A - 5A           |
|        | SU05024-11001      | 0.125A - 0.630A     |
|        | SU05024-11002      | 1.6A - 2A           |
|        | SU05024-11003      | 4A - 5A             |
|        | 2020970207000060   | 0.125A - 5A         |

**Applications**

- This space saving fuse is ideally suited for lighting, power supply, and adapter applications.

**Electrical Characteristics**

| % of Ampere Rating | Opening Time              |
|--------------------|---------------------------|
| 150%               | 60 minutes, Minimum       |
| 210%               | 30 minutes, Maximum       |
| 275%               | 10 ms., Min.; 3 sec. Max. |
| 400%               | 3 ms., Min.; 300 ms. Max. |
| 1000%              | 20 ms. Max.               |

**Additional Information**



Datasheet



Resources




Samples

**Electrical Characteristics**

| Amp Code | Ampere Rating (A) | Voltage Rating (V) | Interrupting Rating** | Nominal Cold Resistance (Ω)* | Nominal Melting Pt (A <sup>2</sup> sec) | Nominal Voltage Drop (mV) | Nominal Power Dissipation (mW) | Agency Approvals |   |   |   |   |
|----------|-------------------|--------------------|-----------------------|------------------------------|---|---------------------------|--------------------------------|------------------|---|---|---|---|
|          |                   |                    |                       |                              |   |                           |                                |                  |   |   |   |   |
| .125     | 0.125             | 250                | 35A @ 250 V AC        | 1.066                        | 0.020                                   | 168                       | 60                             | x                | x | - | x | x |
| .160     | 0.160             | 250                | 35A @ 250 V AC        | 1.000                        | 0.028                                   | 183                       | 92                             | -                | x | - | x | x |
| .250     | 0.250             | 250                | 35A @ 250 V AC        | 0.573                        | 0.110                                   | 87                        | 62                             | -                | x | - | x | x |
| .630     | 0.630             | 250                | 35A @ 250 V AC        | 0.131                        | 0.170                                   | 102                       | 221                            | x                | x | - | x | x |
| 01.6     | 1.6               | 250                | 35A @ 250 V AC        | 0.0388                       | 1.8                                     | 70                        | 382                            | x                | x | x | x | x |
| 002.     | 2.0               | 250                | 35A @ 250 V AC        | 0.0329                       | 2.51                                    | 70                        | 470                            | x                | x | x | x | x |
| 004.     | 4.0               | 250                | 40A @ 250 V AC        | 0.0149                       | 14.64                                   | 70                        | 985                            | x                | x | x | x | x |
| 005.     | 5.0               | 250                | 50A @ 250 V AC        | 0.0111                       | 26.85                                   | 66                        | 1200                           | x                | x | x | x | x |


**Notes:**  
\*Cold resistance measured at less than 10% of rated current at 23°C.  
\*\* Interrupting Rating may differ based on Agency Approval. See Agency Approval certificate for more details.

**Temperature Re-rating Curve**

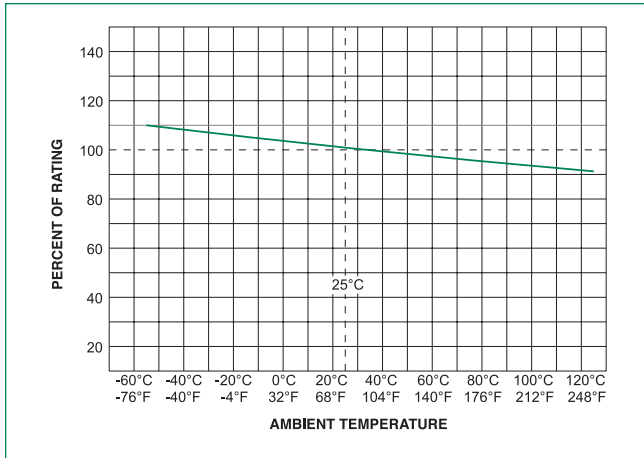


**Note:**  
Derating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

**Average Time Current Curves**

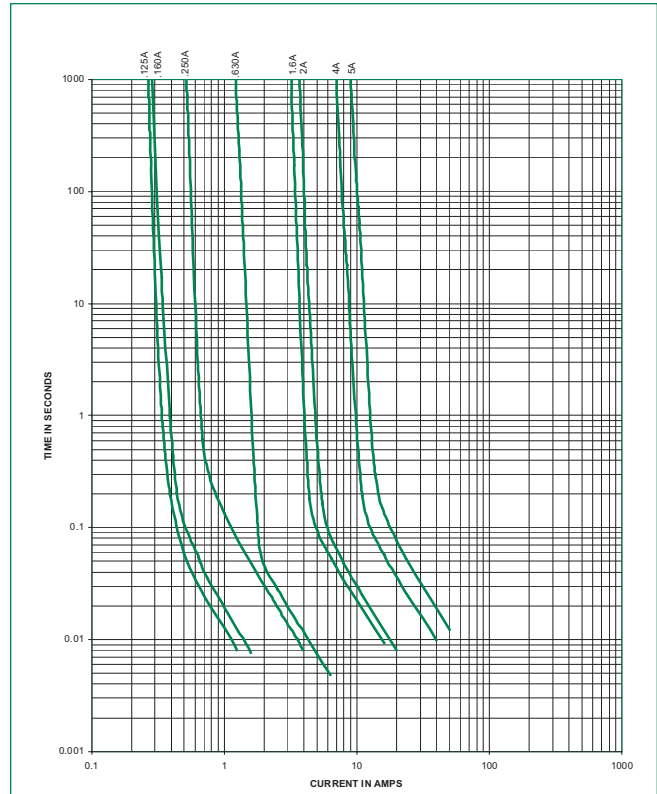

**Soldering Parameters - Wave Soldering**

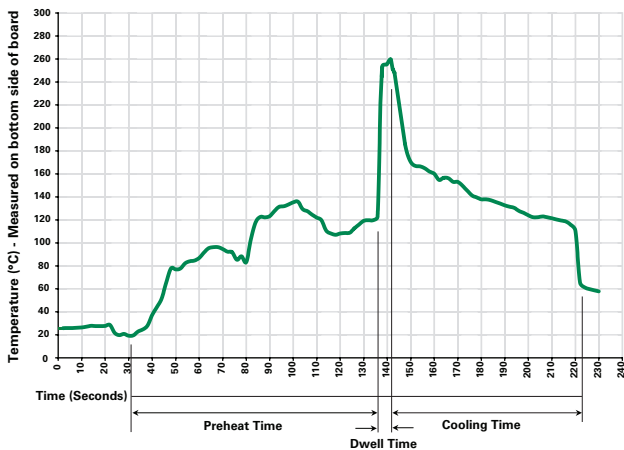

**Recommended Process Parameters:**

| Wave Parameter                                       | Lead-Free Recommendation          |
|--|-----------------------------------|
| Preheat:<br>(Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:                                 | 100°C                             |
| Temperature Maximum:                                 | 150°C                             |
| Preheat Time:  | 60-180 seconds                    |
| Solder Pot Temperature:                              | 260°C Maximum                     |
| Solder Dwell Time:                                   | 2-5 seconds                       |

**Recommended Hand-Solder Parameters:**

Solder Iron Temperature: 350°C +/- 5°C  
Heating Time: 5 seconds max.


**Note:** These devices are not recommended for IR or Convection Reflow process.

### Product Characteristics

|                          |  |
|--------------------------|--|
| <b>Materials</b>         | Body: Ceramic<br>Cap: Nickel Plated Brass<br>Tin Plated Copper |
| <b>Terminal Strength</b> | MIL-STD-202 Method 211,<br>Test Condition A                    |
| <b>Solderability</b>     | IEC 60127-2, Annex A   |
| <b>Product Marketing</b> | Body: Brand Logo, Current Rating<br>Characteristic "F";        |
| <b>Packaging</b>         | Bulk (1000 pcs/pkg)<br>Tape & Reel (1000 pcs/reel)             |


|                              |   |
|------------------------------|---|
| <b>Operating Temperature</b> | -55°C to 125°C  |
| <b>Thermal Shock</b>         | MIL-STD-202, Method 107<br>Test Condition B3 (5 cycles -65°C to +125°C) |
| <b>Vibration</b>             | MIL-STD-202, Method 201 (10-55 Hz)                                      |
| <b>Humidity</b>              | MIL-STD-202, Method 106,<br>High Humidity (90-98%RH), Heat (65°C)       |
| <b>Salt Spray</b>            | MIL-STD-202, Method 101, Test Condition B                               |

### Dimensions

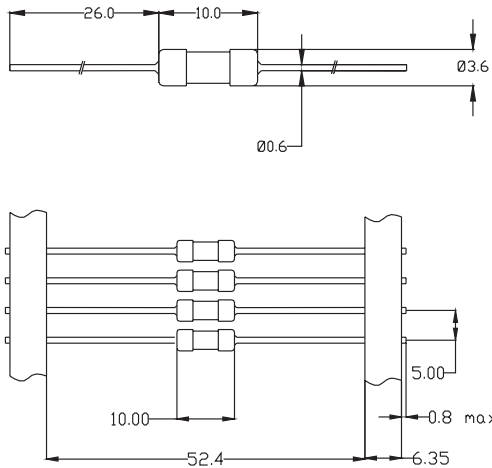

All dimensions in mm

### Part Numbering System

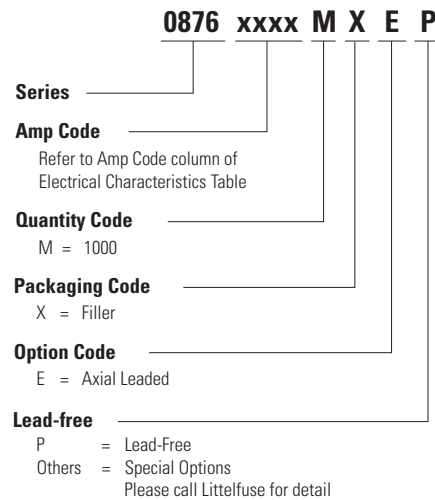

### Packaging

| Packaging Option  | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width        |
|-------------------|-------------------------|----------|---------------------------|---------------------|
| <b>876 Series</b> |                         |          |                           |                     |
| Bulk              | Bulk                    | 1000     | MXE                       | N/A                 |
| Tape and Reel     | EIA 296                 | 1000     | MRET1                     | T1 = 52mm ( 2.062") |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cartridge Fuses](#) category:*

*Click to view products by [Littelfuse](#) manufacturer:*

Other Similar products are found below :

[5TT3A-R](#) [5TT8A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#) [FLSR-30](#) [FRS-1-1/4](#)  
[FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [AGC-1-1/2RX](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-1/2](#) [MSL-1-1/4](#) [MSL-](#)  
[1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#) [BK/MDM-15](#)  
[BK/MDM-3/4](#) [S501-V-10A](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#)  
[301001](#) [301020](#) [311008](#) [313.25](#)