


FP1 MINI® Style PCB Fuse Rated 32V

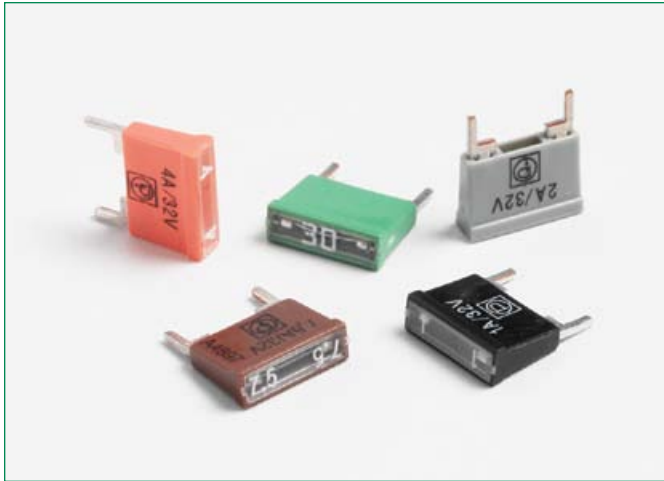

The FP1 is a MINI® style fuse for direct trough-hole pcb soldering. The FP1 has similar performance characteristics as the standard FK1 fuse.

FP1 ist eine Sicherung in MINI-Bauform für direkte Leiterplattenmontage (Durchkontaktierung) mit ähnlichen Leistungsmerkmalen wie die Standard-FK1-Sicherung.

Specifications













UL 248 Special Purpose Fuses
 cULus Recognized: File No. E211637

Insulating body:	Out of thermoplastic (UL 94-V0, heat-resistant)
Cover:	Out of thermoplastic (V0, transparent), Visible melting-element Shunt: Red, not transparent
Terminals:	Soldering pins Copper alloy, gal. Sn plated
Interrupting Rating:	1000 A @ 32 VDC
Packaging:	

Series	Pack Size
168.6585.xxx6	100
168.6585xxx2	1500

Time-Current Characteristics / Schmelzzeit-Grenzwerte


% of Rating % des Nennstromes	Opening Time Min / Max (s) Schmelzcharakteristik Min / Max (s)
110	360,000 s / –
135	0.750 s / 1,800 s
200	0.150 s / 5 s
350	0.040 s / 0.500 s
600	0.020 s / 0.100 s

Part Number Artikel-Nr.	Current Rating Nennstrom	Housing Color Kennfarbe	Typ. Voltage Drop Typ. Spannungsfall		Cold Resistance Kaltwiderstand	I²t
			Standard DIN max.	Littelfuse max.		
168.6585.410_	1 A		225 mV	135 mV	100 mΩ	0.83 A²s
168.6585.420_	2 A		200 mV	110 mV	43.0 mΩ	3.31 A²s
168.6585.430_	3 A		175 mV	110 mV	27.0 mΩ	7.45 A²s
168.6585.440_	4 A		175 mV	110 mV	21.3 mΩ	16.7 A²s
168.6585.450_	5 A		175 mV	105 mV	16.2 mΩ	19.8 A²s
168.6585.475_	7.5 A		150 mV	100 mV	9.70 mΩ	44.5 A²s
168.6585.510_	10 A		125 mV	110 mV	7.40 mΩ	79.2 A²s
168.6585.515_	15 A		125 mV	105 mV	4.50 mΩ	178 A²s
168.6585.520_	20 A		–	100 mV	3.10 mΩ	331 A²s
168.6585.525_	25 A		–	105 mV	2.60 mΩ	653 A²s
168.6585.530_	30 A		–	105 mV	1.90 mΩ	1,264 A²s
160.6585.0002	Shunt		–	60 mV	1.35 mΩ	1,800 A²s


Corresponding holder see Section "Fuse Holders."

FP1 MINI® Style PCB Fuse Rated 32V

Dimensions in mm / Maße in mm

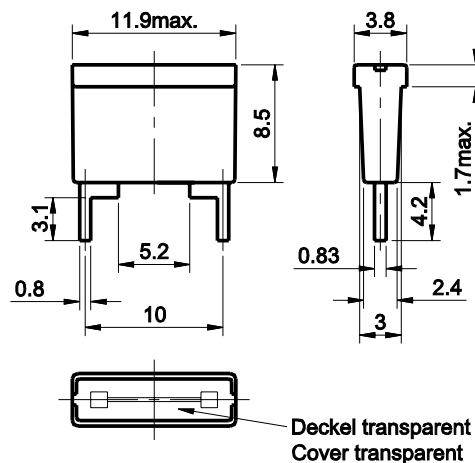

Pre-arcing Time - limits / Schmelzzeit-Grenzwerte DIN

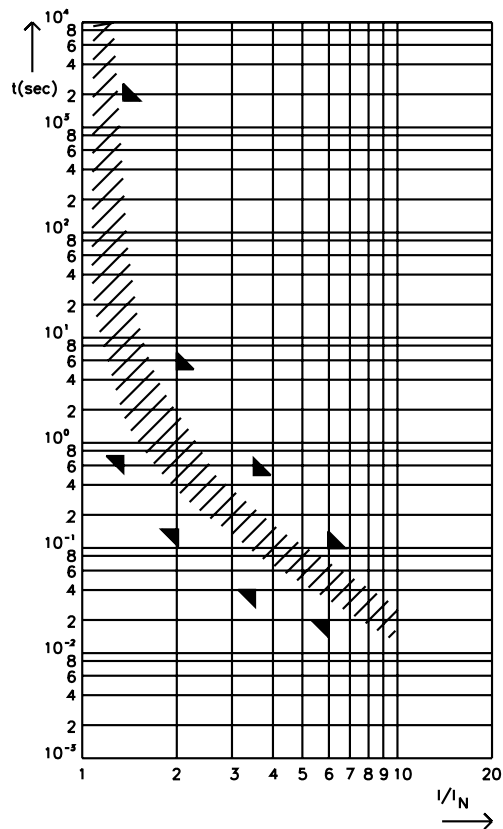

FI = 1.33 (max. operating current: $0.75 \times I_{rat}$ at 23°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Fuses](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[HBO-10](#) [HBO-100](#) [HBO-150](#) [HBO-25](#) [HBO-40](#) [HBO-50](#) [AFX-150](#) [AT-10](#) [AT-30](#) [AT-5](#) [ATM-4LP](#) [ACL-30](#) [ACL-50](#) [AFX-50](#) [HBO-15](#)
[HBO-70](#) [AT-20](#) [AT-25](#) [AT-3](#) [142.7010.5502](#) [BK-HBH-I](#) [BK-AGX-1-2](#) [142.0020.6152](#) [FMM-15](#) [0695030.PXPS](#) [0695040.PXPS](#)
[0297003.WXT](#) [0695025.PXPS](#) [0695015.PXPS](#) [0200300](#) [02400106P](#) [0297002.WXT](#) [0297004.WXT](#) [0297010.WXT](#) [0297015.WXT](#)
[0297020.WXT](#) [0297025.WXT](#) [0297030.WXT](#) [029707.5WXT](#) [0602930](#) [0602935](#) [0602940](#) [0602950](#) [0602960](#) [0611100](#) [0611125](#) [0611150](#)
[0611175](#) [0611200](#) [0611225](#)