


# ATO® FH2 SERIES

## 30 A Max Stackable Block In-Line Fuse Holder

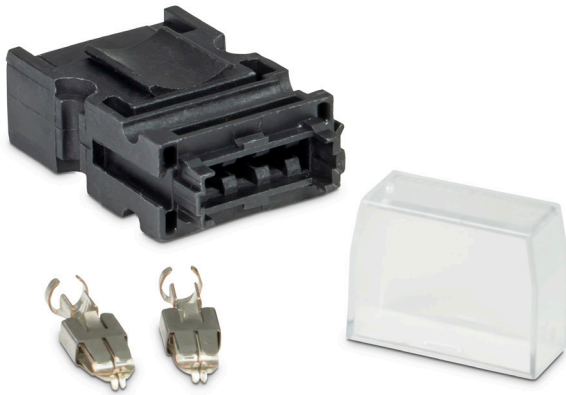

### Description

Install an ATO® blade-style fuse with ease using the ATO® FH2 Stackable Block In-Line Fuse Holder. Attachable in the X- and Y-direction, this stackable fuse holder can also be used with additional ATO® FH2 fuse holders to create a fuse block for protecting multiple circuits.

The ATO® FH2 stackable fuse holder features a black, thermoplastic body with a UL 94 V-0 flammability rating for heat and flame resistance. In addition, the automotive in-line fuse holder assembly can be completed with a transparent thermoplastic cover for protection against debris.

### Web Resources

Download 2D print, installation guide and technical resources at: [littelfuse.com/FH2](http://littelfuse.com/FH2)

### Ordering Information

PART NUMBER	DESCRIPTION	FUSE TYPE	MOUNTING METHOD	FLAMMABILITY RATING
178.6115.0001	Thermoplastic Fuse Holder Housing - 100 Pcs.	ATO	In-Line Fuse Holder	UL 94 V-0
178.6115.0002	Thermoplastic Fuse Holder Housing - 1,000 Pcs.	ATO	In-Line Fuse Holder	UL 94 V-0
178.6116.1001	DFK Crimp Terminal - 0.5 - 1.0 mm <sup>2</sup> - 200 Pcs.	--	--	--
178.6116.1002	DFK Crimp Terminal - 0.5 - 1.0 mm <sup>2</sup> - 1,000 Pcs.	--	--	--
178.6116.1008	DFK Crimp Terminal - 0.5 - 1.0 mm <sup>2</sup> - 3,000 Pcs.	--	--	--
178.6116.2501	DFK Crimp Terminal - 1.5 - 2.5 mm <sup>2</sup> - 200 Pcs.	--	--	--
178.6116.2502	DFK Crimp Terminal - 1.5 - 2.5 mm <sup>2</sup> - 1,000 Pcs.	--	--	--
178.6116.2508	DFK Crimp Terminal - 1.5 - 2.5 mm <sup>2</sup> - 2,500 Pcs.	--	--	--
178.6116.6001	DFK Crimp Terminal - 4.0 - 6.0 mm <sup>2</sup> - 200 Pcs.	--	--	--
178.6125.0001	Transparent Thermoplastic Fuse Holder Cover - 100 Pcs.	--	--	UL 94 V-0
178.6125.0002	Transparent Thermoplastic Fuse Holder Cover - 1,000 Pcs.	--	--	UL 94 V-0

### Specifications

<b>Continuous Current Rating:</b>	30A
<b>Fuse Type:</b>	ATO
<b>Flammability Rating:</b>	UL 94 V-0 Material
<b>Mounting Method:</b>	In-Line Fuse Holder
<b>Input Terminals:</b>	Wire Crimp 6.3mm Receptacles
<b>Output Terminals:</b>	Wire Crimp 6.3mm Receptacles
<b>Additional Notes:</b>	Compatible with the FKS ATO Fuse at 80V DC

### Applications

- Accessory Circuit Protection

### Features and Benefits

- Compatible with ATO® blade-style fuses (sold separately)
- 30 A max continuous current rating
- Attachable in the X- and Y-direction for simple stacking or row mounting
- Heat-resistant thermoplastic fuse holder body with a UL 94 V-0 flammability rating
- Leaf spring connector system
- Wire crimp 6.3 mm receptacles
- Transparent thermoplastic cover offers protection and a clear view

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Holder](#) category:*

*Click to view products by [Littelfuse](#) manufacturer:*

Other Similar products are found below :

[0031.1351.01](#) [6R30A1B](#) [6SC30A2IC](#) [F30A3S](#) [F600A3B](#) [80910030](#) [80910080](#) [9-3557-GP REV A](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#)  
[15602-04-08-21](#) [HTJ-LES-FUSE](#) [RTMF-SC](#) [2602](#) [2650](#) [178.000100](#) [F60A2SQ](#) [T30A2B](#) [G4PB8](#) [2660](#) [HKP-CCHH](#) [R6F30A2S](#) [341001A](#)  
[345621A](#) [348670](#) [CVRMCC](#) [4202](#) [4408](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [HPC](#) [55900008011](#) [345602-010](#) [345603-010](#) [345612](#) [345903A](#)  
[3578](#) [3833-5](#) [3833-7](#) [3992](#) [4393](#) [4409](#) [4522](#) [4574](#) [02800031Z](#) [ESFH04/HTCC35M](#)