

FUSES

SUBMINIATURE

PICO II® Fast-Acting Type

ELECTRICAL CHARACTERISTICS:

| RATING | AMPERAGE | BLOW TIME |
|--------|----------|---------------------|
| 100% | 1/16—15 | 4 hours, minimum |
| 200% | 1/16—10 | 5 seconds, maximum |
| 200% | 12—15 | 10 seconds, maximum |

APPROVALS: Recognized under the Components Program of Underwriters Laboratories through 10 amperes.



COLOR CODING: PICO II® Fuses are color-coded per IEC (International Electrotechnical Commission) Standards Publication 127. The first three bands indicate current rating in milliamperes. The fourth and wider band designates the time-current characteristics of the fuse (red is fast-acting). Fuses are also available without color coding. The Littelfuse manufacturing symbol and ampere rating are marked on the fuse body.

FUSES TO MIL SPEC: See Military Section.

255 000 Series — Axial Leads



256 000 Series — Radial Leads

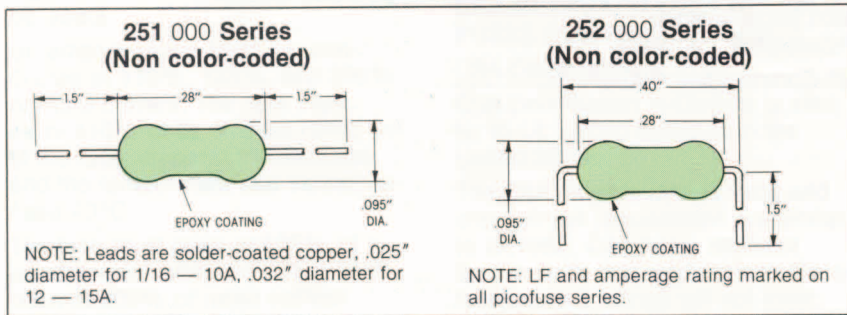

NOTE: To order non color-coded picofuses, use **251 Series** (for Axial leads) or **252 Series** (for Radial leads) in part number table below.



| PART NUMBER | | AMPERE RATING | FIRST SIGNIFICANT FIGURE | SECOND SIGNIFICANT FIGURE | MULTIPLIER | TIME-CURRENT CHARACTERISTIC (Wide Band) | VOLTAGE RATING |
|-------------|--------------|---------------|--------------------------|---------------------------|------------|-----------------------------------------|----------------|
| AXIAL LEADS | RADIAL LEADS | | | | | | |
| 255.062 | 256.062 | 1/16 | Blue | Red | Black | Red | 125 |
| 255.125 | 256.125 | 1/8 | Brown | Red | Brown | Red | 125 |
| 255.250 | 256.250 | 1/4 | Red | Green | Brown | Red | 125 |
| 255.375 | 256.375 | 3/8 | Orange | Violet | Brown | Red | 125 |
| 255.500 | 256.500 | 1/2 | Green | Black | Brown | Red | 125 |
| 255.750 | 256.750 | 3/4 | Violet | Green | Brown | Red | 125 |
| 255.001 | 256.001 | 1 | Brown | Black | Red | Red | 125 |
| 255.01.5 | 256.01.5 | 1-1/2 | Brown | Green | Red | Red | 125 |
| 255.002 | 256.002 | 2 | Red | Black | Red | Red | 125 |
| 255.02.5 | 256.02.5 | 2-1/2 | Red | Green | Red | Red | 125 |
| 255.003 | 256.003 | 3 | Orange | Black | Red | Red | 125 |
| 255.03.5 | 256.03.5 | 3-1/2 | Orange | Green | Red | Red | 125 |
| 255.004 | 256.004 | 4 | Yellow | Black | Red | Red | 125 |
| 255.005 | 256.005 | 5 | Green | Black | Red | Red | 125 |
| 255.007 | 256.007 | 7 | Violet | Black | Red | Red | 125 |
| 255.010 | 256.010 | 10 | Brown | Black | Orange | Red | 125 |
| 255.012 | 256.012 | 12 | Brown | Red | Orange | Red | 32 |
| 255.015 | 256.015 | 15 | Brown | Green | Orange | Red | 32 |

OPTIONS: PICO II® Fuses are available on tape for use with automatic insertion equipment . . . Contact factory.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Littelfuse](#) manufacturer:

Other Similar products are found below :

[V130LA10A](#) [1SMB33AT3G](#) [1SMA24AT3G](#) [0362030.V](#) [59022-3-S-02-F](#) [46213150000](#) [59022-3-T-02-F](#) [59022-3-U-02-F](#) [MDRR-DT-30-35-F](#) [FLEX-14-35-40](#) [SK225RDTP](#) [GTCA28-231M-R05](#) [SMBJ5.0](#) [00970019XP](#) [LX5090](#) [0217010.HXP](#) [0217.500HXP](#) [02181.25TXP](#) [0218.500TXP](#) [0224006.HXUP](#) [740GN](#) [815.650](#) [FLA2.25](#) [FLSR400](#) [FLSR600](#) [900-1535-012RN](#) [901-134](#) [970699013](#) [971-670A-92WCN](#) [153.5631.5601](#) [155100](#) [157.5701.6101](#) [1.5KE110A-B](#) [1.5KE220A](#) [1.5SMC150CA](#) [BLF006](#) [BLF008](#) [JLLS-250](#) [235.200](#) [901-152C-042RN](#) [920-401X-330BN](#) [282007](#) [LFC600602CID](#) [LFR600303CID](#) [LJCA030.X](#) [SE-GRM024](#) [SE-TA6ASF-WL](#) [2N6509G](#) [980-788A-070](#)
[FLNR100](#)