

HWB60 SEALED POWER DISTRIBUTION MODULE

Compact Hard-wired PDM for 280 Style Components





Description

Due to its compact size the Littelfuse HWB60 PDM is the perfect fit for accessory circuits and overflow circuits from your main PDM. But in conjunction with its durable, IP rated construction this unit also makes a suitable main module on smaller vehicles. With the elimination of internal bussing the user can customize their own circuitry utilizing direct wire-to-component connections.

Features/Benefits

- The elimination of internal bussing allows user to customize their own circuitry with direct wire-tocomponent connections.
- User can install any mini (280 style) circuit protection component.
- Compact size. PDM is perfect fit for accessory circuits, overflow circuits from main PDM, or as a main module on smaller vehicles.
- IP67/IP69K sealed units can be installed virtually anywhere on the vehicle. HWB60 stands up to road splash and salt spray, and gives robust protection to devices.
- TPAs (terminal position assurance locks) give secondary locking protection of the wire leads, which aid in prevention of leads from being pulled out. TPAs snap onto the back of the HWB60 after wires are installed, and do not interfere with the cable seals needed to ensure IP protection.
- Easy to connect. Wires plug into the back of the unit using industry-standard Delphi Metri-Pack Series 280 tanged terminals.
- Modular. Multiple HWB60s can be dovetailed together to expand circuit protection capacity. They can also be interlocked to other Littelfuse PDMs and fuse holders (i.e. FLEC, MEGA Flex holder, MIDI Flex holder, etc.) for complete system protection.
- Cover tethers also available to prevent loss of component during service.

Specifications Overview

Max Fuse Rating: 30A per circuit

Max Continuous Current:250ANumber of Cavities60Mounting Torque:4-6 NmOperating Temp:-40 °C to 85 °CIngress Protection:IP67/IP69K

Material: Body & Cover: UL94-V0

TPA: UL94-V0 Gasket: Silicone

Applications

- Accessory Circuits
- Overflow Circuits
- Primary on Small Vehicles

Web Resources

Download 2D print and technical resources at: littelfuse.com/HWB60

Ordering Information

PART NUMBER	DESCRIPTION	
PDM21001LXM	Complete Assembly: Base, cover, gasket and 6 TPAs	

Accessories and Service Parts

PART NUMBER	DESCRIPTION		
868-163	Base		
873-029	Cover		
901-315	Gasket		
883-083	TPA (6 needed per assembly)		
973-680	Optional Tether		



HWB60 SEALED POWER DISTRIBUTION MODULE


Specifications

Max Fuse Rating	30A per circuit			
Max Continuous Current	250A			
Number of Cavities	60			
Recommended Mounting	M6 bolt and lock washer			
Mounting Torque	4-6 Nm			
Temperature Range	-40 °C to +85 °C			
Ingress Protection Rating	IP67/IP69K			
Dimensions	154 x 58 x 82 mm			
Labels	Consult Littelfuse for label options			
Wire Sizes	0.35-5.00 mm ²			
Mating Terminals & Seals	Delphi Metri-Pack 280 Sealed female (tanged) See chart below for details. Sold separately.			
Accessories	Optional: Cover tether			

Mating Terminals and Seals Compatibility

Wire Size Range (mm²)	Insulation Diameter (mm)	Terminal	Cable Seal	Cable Plug
0.50-0.35 mm ²	1.84-2.51 mm	12084201	15324985 / 15324984	12010300
1.00-0.50 mm ²	2.03-3.12 mm	12077411	15324984 / 15324982	12010300
3.00-2.00 mm ²	2.45-3.80 mm	12129493	15324982 / 12015355	12010300

Sold separately. Available from Delphi.

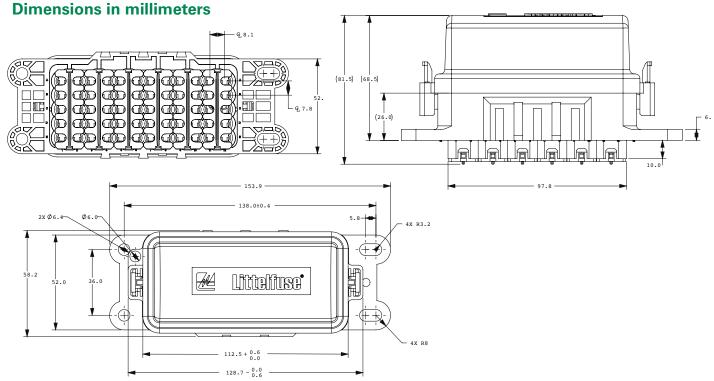



Visit Littelfuse.com for the most up-to-date product information. Littelfuse reserves the right to make product changes, without notice. Material in this document is as accurate as known at the time of publication.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuse Holder Accessories category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below:

BK/1A1337 1A1853 1A4421 1A5220 903-048 1A1337 1A4544 1A5220-01 CO2-10 CO3-03 348897 B072-7007 BK/1A4421 BK/9732 X30110 09030012H 09050023H 00970021HXNVDL 00BS0232P CO2-04 BK1A1853 BK9834 0880.0001 00970053XP 3566C 00970053H 04450718ZX900 CH10CL BP/FP-3 58600000005 33-012C 880140 00970023S 880150 PDM71009ZXM B109-7091-4 B109-7091-6 B109-7091-5 901-524 CVR-RH-25100 LFH60030FBC 03540514Z 03540526Z 03540531Z 03540541Z 03540525Z 03540537Z 03540539Z 03540540Z FEH