


## Terminal Type 1

RoHS

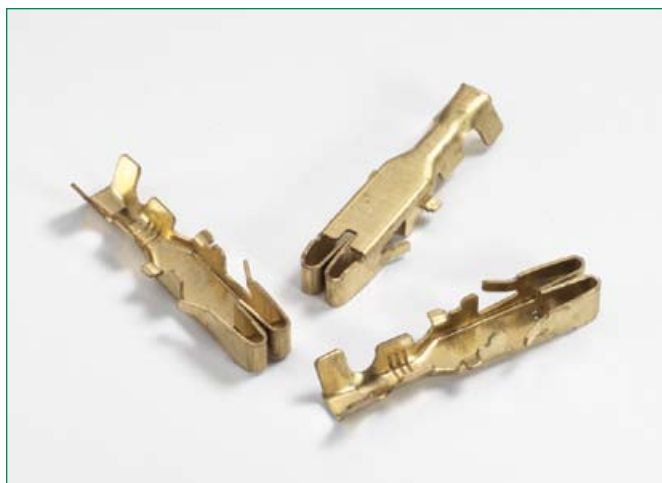

### Terminal Loks

Description Beschreibung	Wire Diam. Drahtdurchmesser	Type of terminal loks Verriegelungstyp
For part number / für Teilenummer: 354501 / 354502 / 354503	0.50 - 2 mm <sup>2</sup>	4
For part number / für Teilenummer: 354501 / 354502 / 354503	0.50 - 2 & 3.3 - 5.3 mm <sup>2</sup>	5
For part number / für Teilenummer: 354501 / 354502	0.50 - 2 mm <sup>2</sup>	6
For part number / für Teilenummer: 354502	0.50 - 2 mm <sup>2</sup>	7

Part Number Teilenummer	Description Beschreibung	Wire Diam. Drahtdurchmesser	Material
913-070 (Reeled/auf Spule per 2200 pcs) 0913070001 (Single per 250 pcs)	Heavy Duty + spring clip* / Schwere Anwendung mit Federclip*	0.5-0.8 mm <sup>2</sup> / 18-20AWG 0.5-0.8 mm <sup>2</sup> / 18-20AWG	Brass / Messing
913-071 (Reeled/auf Spule per 2200 pcs) 913-071XS (Reeled/auf Spule per 2200 pcs)	Heavy Duty + spring clip* / Schwere Anwendung mit Federclip*	1.33-2.09 mm <sup>2</sup> / 14-16AWG 1.33-2.09 mm <sup>2</sup> / 14-16AWG	Brass / Messing Silver plated Copper / Kupfer, versilbert
0913071001 (Single per 250 pcs) 913-072 (Reeled/auf Spule per 2200 pcs)	Heavy Duty + spring clip* / Schwere Anwendung mit Federclip*	1.33-2.09 mm <sup>2</sup> / 14-16AWG 3.32-5.37 mm <sup>2</sup> / 10-12AWG	Brass / Messing
913-072XS (Reeled/auf Spule per 2200 pcs) 0913072001 (Single per 250 pc)	Heavy Duty + spring clip* / Schwere Anwendung mit Federclip*	3.32-5.37 mm <sup>2</sup> / 10-12AWG 3.32-5.37 mm <sup>2</sup> / 10-12AWG	Silver plated Copper / Kupfer, versilbert Brass / Messing
913-058 (Reeled/auf Spule per 4500 pcs) 0913058001 (Single per 250 pcs)	Standard Duty / Normale Anwendung	0.5-0.8 mm <sup>2</sup> / 18-20AWG 0.5-0.8 mm <sup>2</sup> / 18-20AWG	Brass / Messing
913-059 (Reeled/auf Spule per 4500 pcs) 0913059001 (Single per 250 pcs)	Standard Duty / Normale Anwendung	1.33-2.09 mm <sup>2</sup> / 14-16AWG 1.33-2.09 mm <sup>2</sup> / 14-16 AWG	Brass / Messing
913-060 (Reeled/auf Spule per 4500 pcs) 0913060001 (Single per 250 pcs)	Standard Duty / Normale Anwendung	3.32-5.37 mm <sup>2</sup> / 10-12AWG 3.32-5.37 mm <sup>2</sup> / 10-12AWG	Brass / Messing

\* Spring clip material: Stainless steel

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Clips](#) category:*

*Click to view products by [Littelfuse](#) manufacturer:*

Other Similar products are found below :

[5960-64](#) [659524](#) [707190](#) [124472H](#) [BK/4222](#) [BK/4861-01](#) [1A5600](#) [JN1](#) [1A1310-05](#) [1A5940](#) [4121](#) [4207](#) [4861-01](#) [BK/1A5778](#) [BK/1A5779](#)  
[BK1A5780](#) [BK/5682-02](#) [4180](#) [3561TR](#) [1A5780](#) [9483](#) [1A3400-12-R](#) [3519](#) [KEYSTONE](#) [01230001Z](#) [01000057H](#) [01020071Z](#) [01250001Z](#)  
[05200001N](#) [0LCC6](#) [5960-09](#) [BK-1A5601-01](#) [8040.0001](#) [01000058Z](#) [01220087Z](#) [01020079Z](#) [01050002Z](#) [01070002Z](#) [01210002Z](#)  
[BK/1A1119-05](#) [FC -102 bright tin](#) [FC -211 bright tin](#) [3515](#) [3517](#) [3520](#) [3522](#) [3529](#) [3533](#) [3534](#) [3544](#) [3545](#)