


# AK3 Series

## Axial Leaded – 3kA



### Additional Information

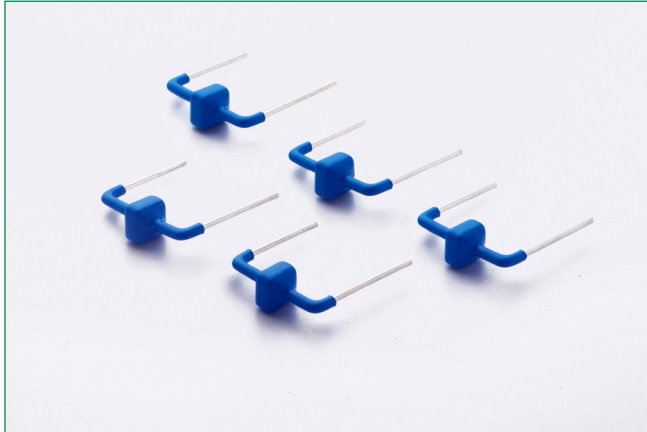

Resources



Accessories



Samples

### Maximum Ratings and Thermal Characteristics

( $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Value	Unit
Operating Storage Temperature Range	$T_{STG}$	-55 to 150	$^\circ\text{C}$
Operating Junction Temperature Range	$T_J$	-55 to 125	$^\circ\text{C}$
Current Rating <sup>1</sup>	$I_{PP}$	3	kA

**Note:**

1. Rated  $I_{PP}$  measured with 8/20 $\mu\text{s}$  pulse.

### Description

The AK3 series of high power TVS diode is specially designed for meeting severe surge test environment of both AC and DC line protection applications. It features a very fast response and ultra low clamping characteristics over traditional metal oxide varistor (MOV) solutions. They can be connected in series and / or parallel to create a very high surge current protection solution.


### Features & Benefits

- Very low clamping voltage
- Ultra compact: less than one-tenth the size of traditional solutions
- Sharp breakdown voltage
- Low slope resistance
- Bi-directional
- Foldbak™ technology for superior clamping factor
- Symmetric in leads width for easier soldering during assembly.
- IEC 61000-4-2 ESD 15kV(Air), 8kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- Halogen-free
- RoHS compliant
- Glass passivated junction
- Pb-free E4 means 2nd level interconnect is Pb-free and the terminal finish material is Silver

### Agency Approvals

Agency	Agency File Number
	E128662

### Functional Diagram



### Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Part Numbers	Part Marking	Standoff Voltage ( $V_{SO}$ ) Volts	Max. Reverse Leakage ( $I_R$ ) @ $V_{SO}$ $\mu\text{A}$	Typical $I_R$ @ $85^\circ\text{C}$ ( $\mu\text{A}$ )	Reverse Breakdown Voltage ( $V_{BR}$ ) @ $I_T$		Test Current $I_T$	Max. Clamping Voltage $V_{CL}$ @ $I_{PB}$ Peak Pulse Current ( $I_{PP}$ ) (Note 1)		Max. Temp Coefficient OF $V_{BR}$	Max. Capacitance 0 Bias 10kHz	Agency Approval
					Min Volts	Max Volts		(mA)	$V_{CL}$ Volts			
AK3 - 015C	3 - 015C	15	10	15	16	19	10	28	3,000	0.1	12.0	X
AK3 - 030C	3 - 030C	30	10	15	32	37	10	90	3,000	0.1	11.0	X
AK3 - 038C	3 - 038C	38	10	15	40	46	10	95	3,000	0.1	10.0	-
AK3 - 058C	3 - 058C	58	10	15	64	70	10	110	3,000	0.1	6.0	X
AK3 - 066C	3 - 066C	66	10	15	72	80	10	120	3,000	0.1	6.0	X
AK3 - 076C	3 - 076C	76	10	15	85	95	10	140	3,000	0.1	6.0	X
AK3 - 150C	3 - 150C	150	10	15	158	194	10	230	3,000	0.1	2.6	X
AK3 - 170C	3 - 170C	170	10	15	179	220	10	260	3,000	0.1	2.4	X
AK3 - 190C	3 - 190C	190	10	15	200	245	10	290	3,000	0.1	2.4	X
AK3 - 208C	3 - 208C	208	10	15	223	246	10	306	3,000	0.1	2.4	X
AK3 - 380C	3 - 380C	380	10	15	401	443	10	520	3,000	0.1	2.0	X
AK3 - 430C	3 - 430C	430	10	15	440	490	10	625	3,000	0.1	2.0	X

Note: 1. Using 8/20 $\mu\text{s}$  wave shape as defined in IEC 61000-4-5.

# AK3 Series

## Axial Leaded – 3kA

### Physical Specifications


<b>Weight</b>	Contact manufacturer
<b>Case</b>	Epoxy encapsulated
<b>Terminal</b>	Silver plated leads, solderable per MIL-STD-750 Method 2026

### Flow/Wave Soldering (Solder Dipping)


<b>Peak Temperature :</b>	265°C
<b>Dipping Time :</b>	10 seconds
<b>Soldering :</b>	1 time

### Wave Solder Profile

**Figure 1:**  
Non Lead-free Profile

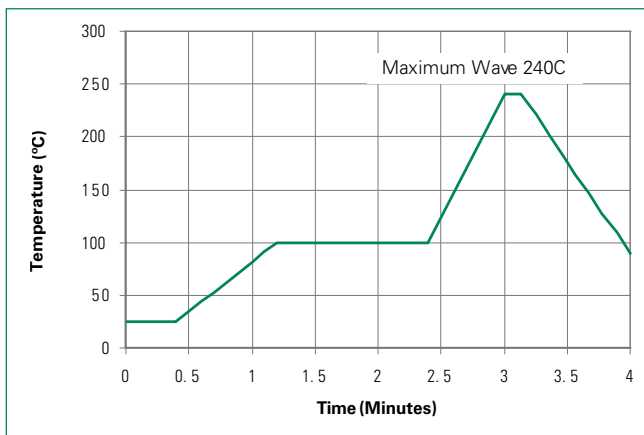


**Figure 2:**  
Lead-free Profile

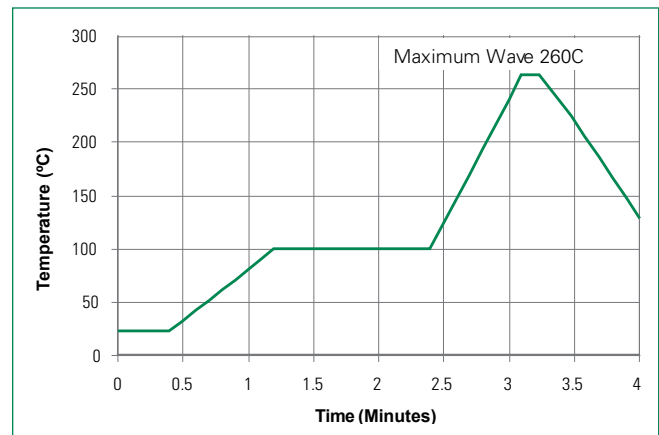


### Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

**Figure 3:**  
Peak Power Derating

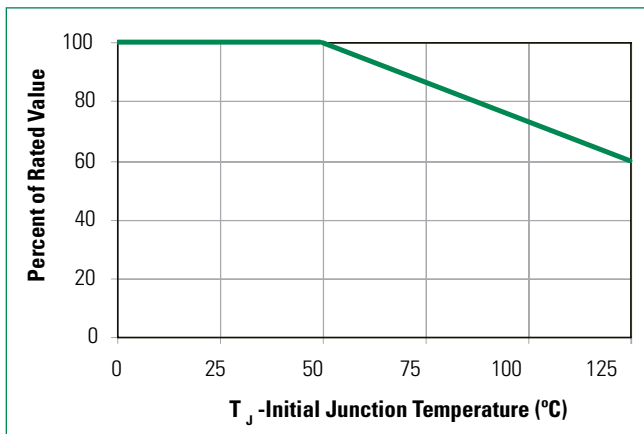

**Figure 4:**  
Surge Response

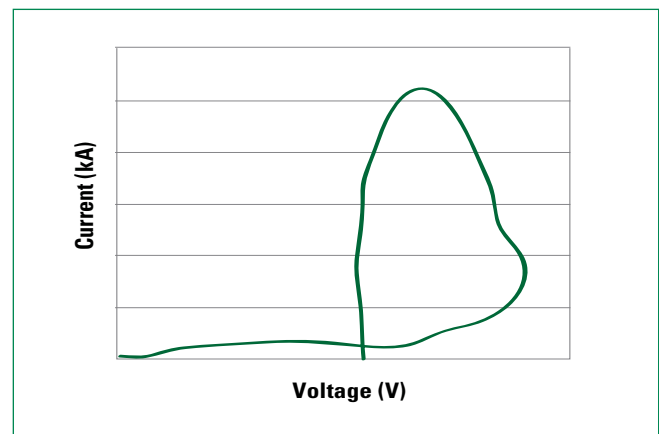


# AK3 Series


## Axial Leaded – 3kA

### Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)


**Figure 5:**  
Typical Peak Pulse Power Rating Curve

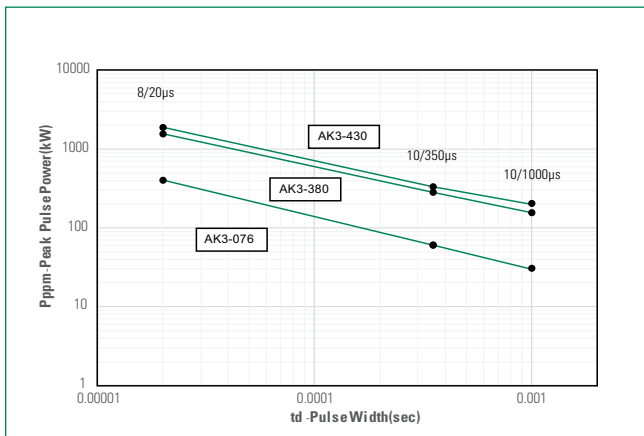


**Figure 6:**  
Typical  $V_{BR}$  Vs Junction Temperature

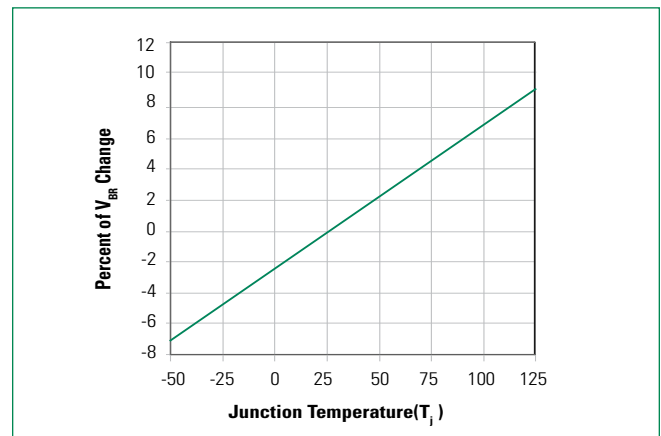

**Figure 7:**  
Surge Response (8/20 Surge current waveform)

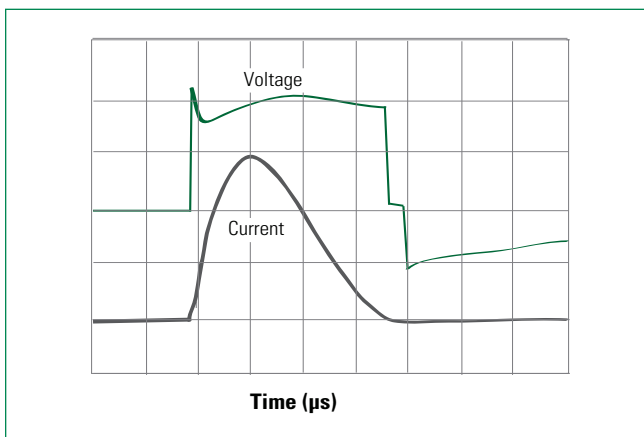

**Figure 8:**  
Pulse Waveform

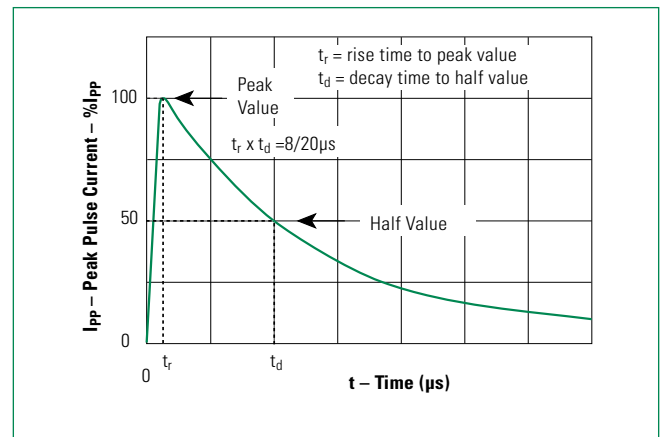


**Note:** The power dissipation causes a change in avalanche voltage during the surge and the avalanche voltage eventually returns to the original value when the transient has passed.

# AK3 Series

## Axial Leaded – 3kA


### Part Marking System

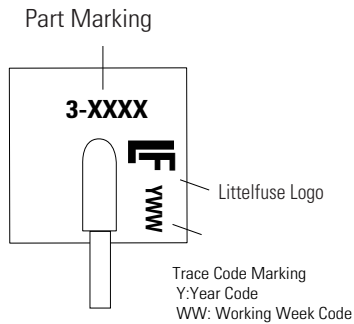

Apply to P/N listed below:

AK3-015C  
AK3-030C  
AK3-038C  
AK3-058C  
AK3-066C  
AK3-076C

Type 1- Side View

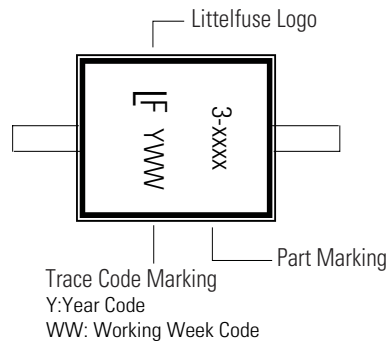


Apply to P/N listed below:

AK3-150C  
AK3-170C  
AK3-190C  
AK3-208C  
AK3-380C  
AK3-430C

Type 2 - Top View


### Part Numbering System

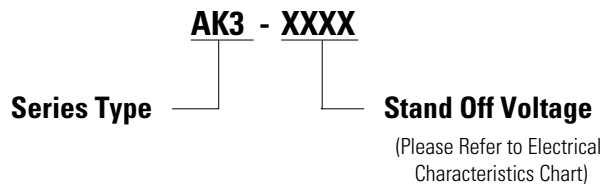

### Packing Options

Part Number	Component Package	Quantity	Packaging Option
AK3-XXXX	AK Package	56pcs/Box	Bulk
AK3-XXXX-12	AK Package	12pcs/Box	Bulk

### Dimensions

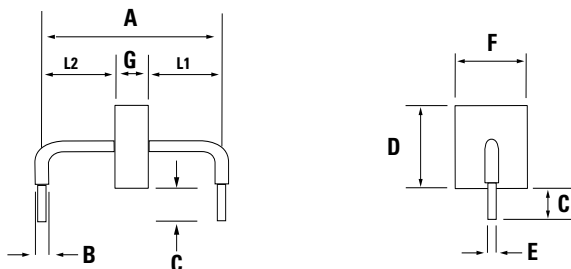

Dimensions	Inches	Millimeters
A	0.951 +/- 0.040	24.15 +/- 1.00
B	0.094 +/- 0.024	2.40 +/- 0.60
C	0.236 +/- 0.039	6.00 +/- 1.00
C	-208C 0.145 +/- 0.040	3.68 +/- 1.00
D	0.433 max.	11.0 max.
E	0.050 +/- 0.002	1.27 +/- 0.05
F	0.374 max.	9.50 max.
G	-015C	0.093 +/- 0.039
	-030C/-038C/-066C	0.130 +/- 0.047
	-058C/-076C	0.168 +/- 0.047
	-150C	0.383 +/- 0.047
	-170C/-190C	0.420 +/- 0.047
	-208C	0.358 +/- 0.047
	-380C	0.547 +/- 0.047
L1	-430C	0.583 +/- 0.047
	-208C	0.296 +/- 0.047
L2	-208C	L1 = L2 tolerance +/- 0.047 inch (+/- 1.20 mm) = A - (G+L1) tolerance +/- 0.047 inch (+/- 1.20 mm)
	-208C	L1 = L2 tolerance +/- 0.047 inch (+/- 1.20 mm)

**Disclaimer Notice** - Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse. "Littelfuse" includes Littelfuse, Inc., and all of its affiliate entities. <http://www.littelfuse.com/disclaimer-electronics>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Littelfuse](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)  
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD112-B1-02EL](#) [E6327](#)  
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD203-B1-02EL](#) [E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [82356240030](#)  
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)  
[D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#) [5KP18A](#)