

Surface Mount ThermistorsLeadless Top Bottom Terminated Chip Thermistor

BC Series Leadless Top/Bottom Terminated Chip Thermistors

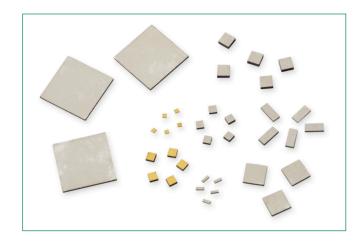

Dimensions

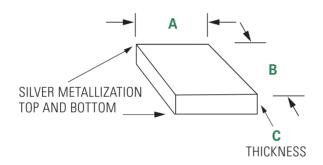

Dimensions shown in inches.

Α	В	С
See Dim	See Dim	See Dim
"L"	"W"	"T"

Description

Littelfuse leadless top/bottom terminated chip thermistor elements are designed for use on hybrid substrates, integrated circuits and printed circuit boards. They have silver metallization on their top and bottom surfaces which are suitable for various contact techniques including epoxy or solder. Other metallization materials are available as well. Since they are manufactured using the most advanced equipment and technology available, their dimensional parameters are extremely uniform, making the devices especially suitable for use with automatic handling and placement equipment.


Options

- Non-standard resistance values and tolerances
- Special lead materials and lengths
- Special encapsulants or probe housings
- Tape and reel packaging

Features

- Surface mountable
- Small size
- Very low profile
- Low cost
- Rapid response time

Part Numbering System

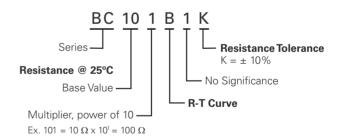

Note: Not all combinations of Part Number codes are available. Contact Littelfuse for details.



BC Series Leadless Top/Bottom Terminated Chip Thermistors

Specifications

Part Number	Resistance Ohms @25°C	*Resistance Tol. ± % @ 25°C	R-T Curve	Temperature Coefficient (%/°C) @ 25°C	Beta (K) 0-50°C	Dissipation Constant, Nominal (mW/°C)	Thermal Time Constant, Max Still Air (seconds)	Temperature Rating (°C)
BC101B1K	100	10	В	-3.31	2941	1	2	-55 to +150
BC501B1K	500	10	В	-3.31	2941	1	2	-55 to +150
BC102F1K	1000	10	F	-3.86	3419	1	2	-55 to +150
BC222J1K	2252	10	J	-4.4	3892	1	2	-55 to +150
BC302J1K	3000	10	J	-4.4	3892	1	2	-55 to +150
BC502J1K	5000	10	J	-4.4	3892	1	2	-55 to +150
BC103J1K	10000	10	J	-4.4	3892	1	2	-55 to +150
BC203J1K	20000	10	J	-4.4	3892	1	2	-55 to +150
BC303J1K	30000	10	J	-4.4	3892	1	2	-55 to +150
BC503J1K	50000	10	J	-4.4	3892	1	2	-55 to +150
BC104R1K	100000	10	R	-4.68	4140	1	2	-55 to +150

^{*}Resistance tolerances of \pm 1%, 2%, and 5% are available upon request

Packaging

Packaging Option	Packaging Code	Standard
ESD Waffle Pack	-WF	NA

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littlefuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littlefuse.com/disclaimer-electronics

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NTC (Negative Temperature Coefficient) Thermistors category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below:

118-253FAJ-P01 121-202EAC-P01 123-802EAJ-P01 128-105NDP-Q02 129-202VME-S01 135-503LAD-J01 B57250V2473F560

B57620C472K962 B57620C5103J062 B57621C5102J062 A1004SG22P0 192-103LPR-A01 199-303KAF-A02 30054-4 B57471V2474H062

B57620C5102J062 B57620C5223J062 500-52AA04-101 526-31AA19-104 526-31AN12-202 103AT-5-1P-FT 10K3A542I 111-802EAJ-901

112-103FAG-H02 112-104KAG-B01 11028414-00 111-182CAG-H01 112-103FAF-H01 112-104KBF-F01 118-202CAJ-P01 526-31AA79102 B57442V5103J62 517-59CL01-202 B57401V2103H62 B57621C5472J62 11032565-00 194303KEVA01 NTCACAPE3C90193

B57621C5472K062 135-105QAF-J02 B57421V2153J062 B57230V2103H260 B57471V2684H062 B57471V2333H062