


# CIO-EN

Communication link to PLC/SCADA/  
monitoring systems



## Wiring Diagram

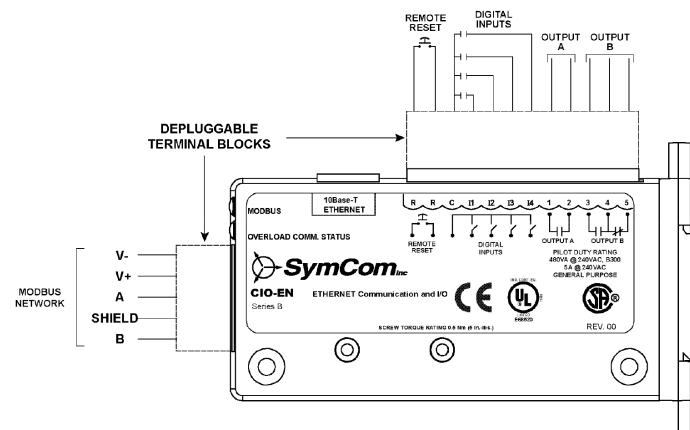

## Specifications

### Input Characteristics

#### Power Requirements:

<b>Voltage</b>	24VDC +10%
<b>Current</b>	95mA (max.) 70mA (typical)
<b>Power</b>	2.28 W (max.) 1.7 W (typical)
<b>Digital Inputs</b>	
<b>General Purpose (4)</b>	
<b>Voltage Range</b>	12-24VDC
<b>Current</b>	2mA (typical)

### Functional Specifications

<b>Remote Reset (for use with optional 777 Series)</b>	Normally open pushbutton rated 24VDC, 10mA (min.)
<b>Ethernet Controller Capability</b>	IEEE 802.3
<b>Output Characteristics</b>	10Base-T
<b>SPDT (1), SPST (1)</b>	
<b>Pilot Duty</b>	480VA & 240VAC, B300
<b>General Purpose</b>	5A @ 240VAC
<b>General Characteristics</b>	
<b>Ambient Operating Temperature</b>	-20° to 70°C (-4° to 158°F)

## Description

The CIO-EN Module (non-POE) is a convenient and cost-effective Modbus-TCP and Modbus-RTU interface capable of providing discrete control and monitoring of an overload relay over a Modbus network.

## Features & Benefits

FEATURES	BENEFITS
<b>Compact size 3.4" H x 1.0" W x 5.46" D</b>	Easily adapts to existing as well as new applications
<b>Flexible addressing standard allows function as stand-alone interface or in conjunction with 777 series overload relay</b>	Provides flexibility for control and monitoring
<b>Remote reset option</b>	Additional remote reset input allows user to reset 777 series relays without opening the panel
<b>DIN rail or surface mountable</b>	Allows installation flexibility
<b>Built in Ethernet jack</b>	Reduces field wiring

### Terminal (depluggable terminal block)

<b>Torque</b>	3 in.-lbs. (max.)
<b>Wire AWG</b>	12-20 AWG
<b>Class of Protection</b>	IP20, NEMA 1 (finger safe)
<b>Relative Humidity</b>	10-95%, non-condensing per IEC 68-2-3
<b>Standards Passed</b>	
<b>Electrostatic Discharge (ESD)</b>	IEC 61000-4-2, Level 3, 6kV contact, 8kV air
<b>Radio Frequency Immunity, Radiated</b>	150 MHz, 10V/m
<b>Fast Transient Burst</b>	IEC 61000-4-4, Level 3, 4kV input power
<b>Hi-Potential Test</b>	Meets UL508 (2 x rated V + 1000V for 1 min)
<b>Surge</b>	
<b>Input Power</b>	IEC 61000-4-5, Level 1
<b>Inputs/Data Lines</b>	IEC 61000-4-5, Level 2
<b>Safety Marks</b>	
<b>UL</b>	UL508 (File #E68520)
<b>CSA</b>	C22.2 (File #46510)
<b>CE</b>	IEC 60947-6-2
<b>Enclosure</b>	Polycarbonate
<b>Dimensions</b>	<b>H</b> 86.36 mm (3.4"); <b>W</b> 25.4 mm (1.0"); <b>D</b> 138.68 mm (5.46")
<b>Weight</b>	0.25 lb. (4 oz., 113.4 g)
<b>Mounting Methods</b>	DIN Rail or surface mount (w/two #8 screws)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Ethernet Modules](#) category:***

***Click to view products by [Littelfuse](#) manufacturer:***

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [FC6A-PH1](#) [W4S105C](#) [GX-ID1611](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [105FX-SC-MDR](#) [110FX2-SC](#) [BCM54291B0IQLEG](#) [750-494](#) [750-495](#) [750-643](#) [750-940](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-4FP-AE](#) [2352903-2](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [1005957](#) [1006191](#) [304TX-N](#) [WIZ107SR\\_TTL](#) [ES-320](#) [TDKEZW5](#) [2003025](#) [2003037](#) [2013040](#) [2013050](#) [2014120](#) [2014126](#) [2014130](#)