

3 Pole Contactor 50–120 FLA

HCD Series



Specifications

Initial Dielectric Strength

Between Contacts & Coils: 2,200 VAC
 Between Poles: 2,200 VAC
 Between Open Contacts: 2,200 VAC

Arc Cover

Standard

Insulation System

130°C Class B

Temperature Range

-40°C to +65°C
 -40°F to +150°F

Unit Weight

50–60 FLA 32 oz
 75–120 FLA 64 oz

Power Pole Terminations

Aluminum box lug

Wire Size

50–60 FLA Box Lug 14-2
 75–90 FLA Box Lug 14-1

Recommended Tightening Torque

Box lug: 50 in. lbs

Quick Connects

Coil terminals:
 Dual: .250" QC or #6–32 screw/.250" QC

Power terminals:

Dual .250" QC


3 pole contactors are typically used in commercial applications. These contactors utilize three wires to control electrical current direction. Our engineers and quality specialists provide services that meet or exceed customer requirements—all products undergo in-house testing and validation. We carry extensive inventory to meet delivery schedules.

Features


- 3 Pole NO
- Silver Cadmium Oxide Contacts
- UL 508 File No. E227250
- CSA File No. 221260 (1456104)
- Multiple mounting and termination options available, contact us for more information.

Dimensions (inches [mm])

50–60 FLA

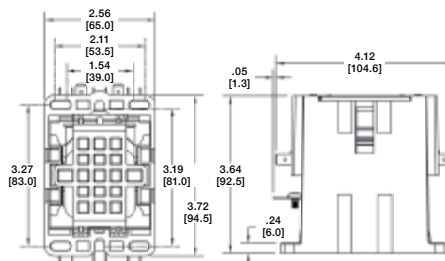

75–120 FLA

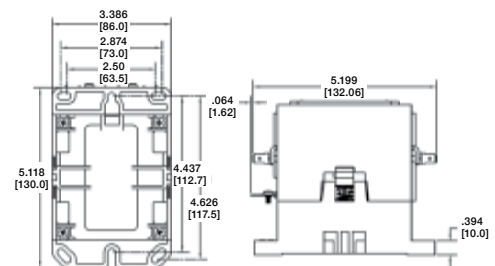

We can custom engineer a solution to meet any need. Just ask.

3 Pole Contactor 50–120 FLA

HCD Series

3 Pole Contactors				
50	65	300	250	200
60	75	360	300	240
75	90	450	375	300
90	120	540	450	360
120	150	720	600	480

3 Pole Contactors								
50	3	-	10	15	-	30	-	30
60	5	-	10	25	-	30	-	30
75	5	-	15	25	-	40	-	40
90	7.5	-	20	30	-	50	-	50
120	7.5	-	20	30	-	50	-	50

Suitable for use on a circuit capable of delivering not more than 5k rms symmetrical amperes, 600 Volts maximum at 400% of fuse and circuit breaker.

Suitable for use on a circuit capable of delivering not more than 100k rms symmetrical amperes as shown.

	Maximum Circuit Breaker		Maximum J Fuse	
	480 Volts Maximum	Minimum Enclosure Volume	600 Volts Maximum	Minimum Enclosure Volume
05	150 A	256 cu. in.	200 A	256 cu. in.
06	150 A	256 cu. in.	200 A	256 cu. in.
07	225 A	1008 cu. in.	200 A	1008 cu. in.
09	225 A	1008 cu. in.	200 A	1008 cu. in.
12	225 A	1008 cu. in.	200 A	1008 cu. in.

Note: for a circuit capable of delivering more than 5k rms symmetrical amperes, the equipment enclosure must have a minimum of four fastening points or a piano hinge and two fastening points.

Multiple mounting and termination options available, contact us for more information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Contactors - Electromechanical category](#):

Click to view products by [Littelfuse manufacturer](#):

Other Similar products are found below :

[6-1618400-7](#) [686-117111](#) [686-120111](#) [686-924](#) [686-948](#) [70-901](#) [70-914](#) [MB-3D-6](#) [MC-22A/4-AC120V](#) [8-1616943-9](#) [A40-30-10-84](#) [120-905](#) [A701U](#) [120-904](#) [1393132-9](#) [154-905](#) [154-912](#) [154-913](#) [154-915](#) [154-902](#) [154-910](#) [B6-40-00-84](#) [B7-40-00-84](#) [1616017-5](#) [1616021-1](#) [1616039-1](#) [MVDILM](#) [P25-E5019-1](#) [P30C47A12D1-120](#) [P40C47A12D1-120](#) [P40P47D13P1-24-01](#) [CA7-12-10-240](#) [90-162](#) [9-1393132-2](#) [2NC4F0222](#) [A275KXXV2-120VAC](#) [ACC338UMM20](#) [AF80-30-11-13](#) [SZ-B1](#) [CGC-9A-120](#) [3GC2H0M22](#) [3NC0T0A22](#) [3NC1Q0A22](#) [3NC2H0A22](#) [3NC2T0122/SE](#) [3TF3400-0BB4](#) [MC-12B-DC24V](#) [42AF35AG](#) [42AF35AH](#) [42CF35AE](#)