


### DST8100S



#### Pin out

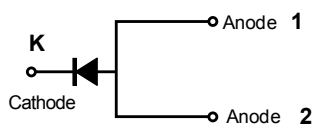

#### Description

Littelfuse DST series Ultra Low  $V_F$  Schottky Barrier Rectifier is designed to meet the general requirements of commercial and industry applications by providing high temperature, low leakage and lower  $V_F$  products.

It is suitable for high frequency switching mode power supply, free-wheeling diodes and polarity protection diodes.

#### Features

- Ultra low forward voltage drop
- High frequency operation
- MSL: Level 1 - unlimited
- High junction temperature capability
- Trench MOS Schottky technology
- Single die in TO-277B Package
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/ JEDEC J-STD-609A.01)

#### Applications

- Switching mode power supply
- DC/DC converters
- Free-Wheeling diodes
- Polarity Protection Diodes

#### Maximum Ratings

| Parameters                                  | Symbol      | Test Conditions   | Max | Unit |
|---|-------------|---|-----|------|
| Peak Inverse Voltage                        | $V_{RWM}$   | -   | 100 | V    |
| Average Forward Current                     | $I_{F(AV)}$ | 50% duty cycle @ $T_L = 125^\circ\text{C}$<br>rectangular wave form | 8   | A    |
| Peak One Cycle Non-Repetitive Surge Current | $I_{FSM}$   | 8.3 ms, half Sine pulse   | 150 | A    |

#### Electrical Characteristics


| Parameters             | Symbol   | Test Conditions   | Typ  | Max   | Unit             |
|------------------------|----------|---|------|-------|------------------|
| Forward Voltage Drop*  | $V_{F1}$ | @4A, Pulse, $T_J = 25^\circ\text{C}$                                      | 0.52 | -     | V                |
|                        |          | @8A, Pulse, $T_J = 25^\circ\text{C}$                                      | 0.66 | 0.68  |                  |
|                        | $V_{F2}$ | @4A, Pulse, $T_J = 125^\circ\text{C}$                                     | 0.47 | -     |                  |
|                        |          | @8A, Pulse, $T_J = 125^\circ\text{C}$                                     | 0.58 | 0.62  |                  |
| Reverse Current*       | $I_{R1}$ | @ $V_R = \text{rated } V_R, T_J = 25^\circ\text{C}$                       | 13.5 | 70    | $\mu\text{A}$    |
|                        | $I_{R2}$ | @ $V_R = \text{rated } V_R, T_J = 125^\circ\text{C}$                      | 3.5  | 15    | mA               |
| Junction Capacitance   | $C_T$    | @ $V_R = 5\text{V}, T_C = 25^\circ\text{C}, f_{\text{SIG}} = 1\text{MHz}$ | 542  | -     | pF               |
| Voltage Rate of Change | dv/dt    |   | -    | 10000 | V/ $\mu\text{s}$ |

\* Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%


### Thermal-Mechanical Specifications

| Parameters  | Symbol     | Test Conditions | Max         | Unit |
|---|------------|-----------------|-------------|------|
| Junction Temperature                              | $T_J$      |                 | -55 to +150 | °C   |
| Storage Temperature                               | $T_{stg}$  |                 | -55 to +150 | °C   |
| Maximum Thermal Resistance<br>Junction to Ambient | $R_{thJA}$ | DC operation    | 75          | °C/W |
| Maximum Thermal Resistance<br>Junction to Lead    | $R_{thJL}$ |                 | 4           | °C/W |
| Approximate Weight                                | wt         |                 | 0.08        | g    |
| Case Style  |            | TO-277B         |             |      |


**Figure 1: Typical Forward Characteristics**

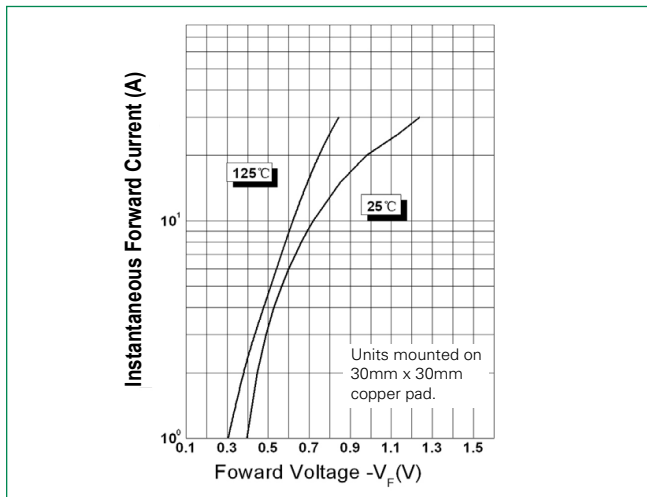


**Figure 2: Typical Reverse Characteristics**

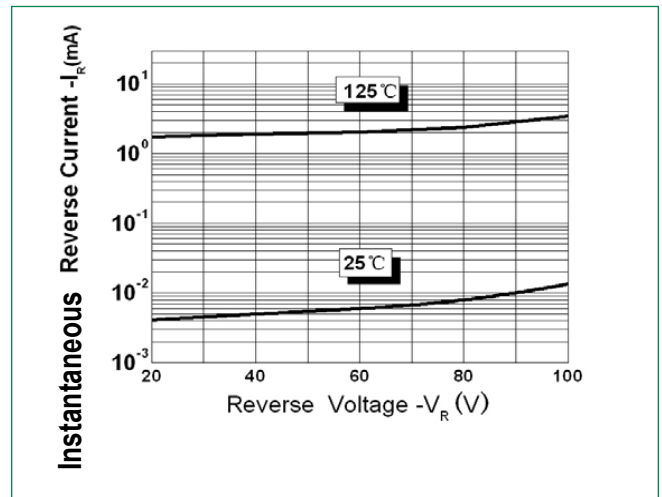

**Figure 3: Typical Junction Capacitance**

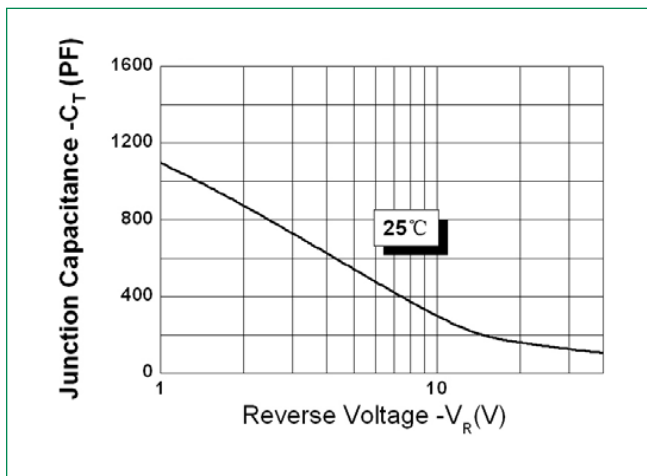


### Dimensions-TO-277B

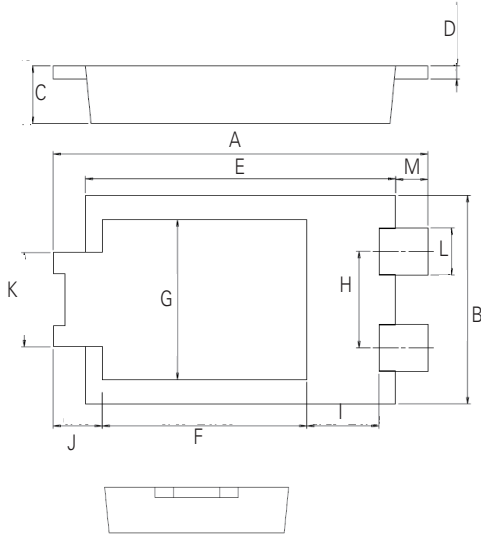


| Symbol   | Millimeters |      |      |
|----------|-------------|------|------|
|          | Min         | Typ  | Max  |
| <b>A</b> | 6.30        | 6.50 | 6.70 |
| <b>B</b> | 3.88        | 3.98 | 4.08 |
| <b>C</b> | 0.95        | 1.10 | 1.25 |
| <b>D</b> | 0.20        | 0.25 | 0.30 |
| <b>E</b> | 5.28        | 5.38 | 5.48 |
| <b>F</b> | 3.40        | 3.55 | 3.70 |
| <b>G</b> | 2.90        | 3.05 | 3.20 |
| <b>H</b> | 1.74        | 1.84 | 1.94 |
| <b>I</b> | 1.10        | 1.25 | 1.40 |
| <b>J</b> | -           | 0.85 | -    |
| <b>K</b> | 1.70        | 1.80 | 1.90 |
| <b>L</b> | 0.85        | 0.90 | 0.95 |
| <b>M</b> | -           | 0.56 | -    |

### Mounting Pad Layout

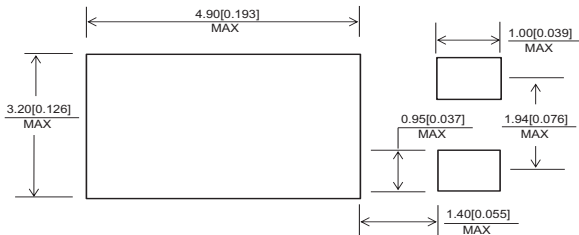

### Part Numbering and Marking System




**DST** = Device Type  
**8** = Forward Current (8A)  
**100** = Reverse Voltage (100V)  
**S** = Package Type  
**LF** = Littelfuse  
**YY** = Year  
**WW** = Week  
**L** = Lot Number

### Packing Options

| Part Number | Marking  | Packing Mode   | M.O.Q |
|-------------|----------|----------------|-------|
| DST8100S    | DST8100S | 5000pcs / Reel | 5000  |

### Carrier Tape & Reel Specification

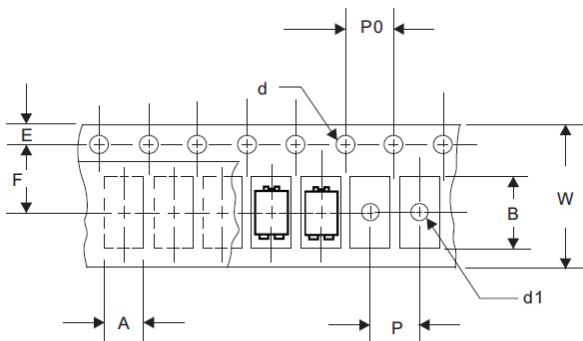

| Symbol    | Millimeters |       |
|-----------|-------------|-------|
|           | Min         | Max   |
| <b>A</b>  | 4.28        | 4.48  |
| <b>B</b>  | 6.80        | 7.00  |
| <b>d</b>  | 1.40        | 1.60  |
| <b>d1</b> | -           | 1.50  |
| <b>E</b>  | 1.65        | 1.85  |
| <b>F</b>  | 5.40        | 5.60  |
| <b>P</b>  | 7.90        | 8.10  |
| <b>P0</b> | 3.90        | 4.10  |
| <b>W</b>  | 11.70       | 12.30 |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Littelfuse](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#) [BAS16E6433HTMA1](#) [BAT](#)  
[54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SK310-T](#) [SK32A-LTP](#) [SK34B-TP](#)  
[SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#)  
[SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#)  
[ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#)  
[SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#) [NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#) [NTE6081](#) [SB560](#) [PMAD1108-LF](#)  
[SD103ATW-TP](#)