

L70S SERIES HIGH-SPEED FUSE

700 Vac • 650 Vdc • 10-800 A • Traditional Round Body Style



Description

Littelfuse L70S Series High-Speed Fuses are designed to protect today's equipment and systems, and are manufactured with Littelfuse-developed technology that sets tomorrow's standards for accuracy, consistent quality, reliability, and predictable performance.

Littelfuse engineers have redefined High-Speed Fuse technology by using advanced metallurgical, polymer, and materials research, mathematical modeling, and computerized statistical analysis.

Features/Benefits

- Extremely Current Limiting
- Low Watt Losses
- Controlled Transient Over-voltages
- UL Recognized


Applications

- AC & DC Drives
- DC Common Bus Protection
- Power Converters
- UPS
- Soft-Starters

Specifications

| | |
|------------------------------|---|
| Voltage Rating | 700 Vac 650 Vdc |
| Amperage Rating | 10, 15, 20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100, 125, 150, 175, 200, 225, 250, 300, 350, 400, 450, 500, 600, 700, 800 |
| Interrupting Rating | AC: 200 kAIC DC: 20 kAIC |
| Material | Body: Melamine Terminals: Copper (silver plated) |
| Mounting Type | Cylindrical (10 - 30 A) Bolted Tags (35 - 800 A) |
| Operating Temperature | -55° C to +125° C |
| Storage Temperature | Up to 35° C with relative humidity less than 65% |
| Approvals | UL Recognized (File: E71611) CSA Recognized (File: LR29862) |
| Environmental | RoHS Compliant |
| Country of Origin | Mexico |

Part Numbering System

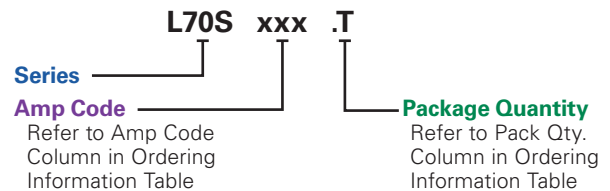

| SERIES | AMP | CATALOG NUMBER | ORDERING NUMBER |
|--------|-----|----------------|-----------------|
| L70S | 10 | L70S010 | L70S010.T |
| L70S | 500 | L70S500 | L70S500.X |

Recommended Fuse Block

- LSCR001 (35–100 A)
- LSCR002 (125–800 A)

Web Resources

Download technical documents: littelfuse.com/L70S

L70S SERIES HIGH-SPEED FUSE

Dimensions

| AMPERE RATING | FIGURE NO. | DIMENSIONS INCHES (mm) | | | | | | | | |
|---------------|------------|--|---|---|--|-----------|-----------|---------------------------------------|------------|------------|
| | | A | B | C | D | E | F | G | H | J |
| 10 – 30 | 1 | 2 (50.8) | — | ½ (12.7) | ⅞ (14.3) | — | — | — | — | — |
| 31 – 60 | 2 | 2⅞ (73.0) | 3⅞ (87.3) | 3¾ (95.2) | 4⅜ (111.1) | 1 (25.4) | 4⅞ (17.1) | 1½ (8.7) | ⅞ (3.2) | — |
| 61 – 100 | 2 | 2⅞ (73.0) | 3⅞ (90.5) | 3⅞ (93.7) | 4⅜ (111.1) | 1⅞ (31.0) | 2⅞ (22.9) | ⅞ (7.9) | 3/16 (4.8) | — |
| 101 – 200 | 2 | 2 ²⁷ / ₃₂ (72.2) | 3 ¹⁷ / ₃₂ (89.7) | 4 ⁵ / ₃₂ (105.6) | 5 ³ / ₃₂ (129.4) | 1½ (38.1) | 1 (25.4) | 1 ³ / ₃₂ (10.3) | ¼ (6.4) | — |
| 201 – 400 | 2 | 2 ²⁷ / ₃₂ (72.2) | 3 ¹⁷ / ₃₂ (89.7) | 4 ⁵ / ₃₂ (105.6) | 5 ³ / ₃₂ (129.4) | 2 (50.8) | 1½ (38.1) | 1 ³ / ₃₂ (10.3) | ¼ (6.4) | — |
| 401 – 600 | 2 | 2 ²⁷ / ₃₂ (72.2) | 4 ²⁹ / ₃₂ (124.6) | 5¼ (133.4) | 7 ³ / ₃₂ (180.2) | 2½ (63.5) | 2 (50.8) | 1 ⁷ / ₃₂ (13.5) | 3/8 (9.5) | — |
| 601 – 800 | 3 | 3 ⁵ / ₁₆ (84.1) | 5 ⁵ / ₁₆ (134.9) | 6 ¹³ / ₁₆ (173.0) | — | 2⅞ (73.0) | 2 (50.8) | 5/8 (15.9) | 3/8 (9.5) | 5/16 (7.9) |




Figure 1

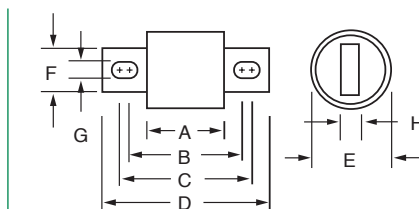


Figure 2

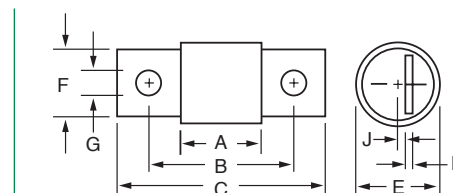


Figure 3

Ordering Information

| SERIES | AMPERAGE RATING | AMP CODE | CATALOG NUMBER | ORDERING NUMBER | PACK QUANTITY | UPC |
|--------|-----------------|----------|----------------|-----------------|---------------|-------------|
| L70S | 10 | 010 | L70S010 | L70S010.T | 10 Pcs/ Box | 07945810161 |
| L70S | 15 | 015 | L70S015 | L70S015.T | 10 Pcs/ Box | 07945810163 |
| L70S | 20 | 020 | L70S020 | L70S020.T | 10 Pcs/ Box | 07945810164 |
| L70S | 25 | 025 | L70S025 | L70S025.T | 10 Pcs/ Box | 07945810165 |
| L70S | 30 | 030 | L70S030 | L70S030.T | 10 Pcs/ Box | 07945810166 |
| L70S | 35 | 035 | L70S035 | L70S035.T | 10 Pcs/ Box | 07945810152 |
| L70S | 40 | 040 | L70S040 | L70S040.T | 10 Pcs/ Box | 07945810167 |
| L70S | 50 | 050 | L70S050 | L70S050.T | 10 Pcs/ Box | 07945810168 |
| L70S | 60 | 060 | L70S060 | L70S060.T | 10 Pcs/ Box | 07945810169 |
| L70S | 70 | 070 | L70S070 | L70S070.V | 5 Pcs/ Box | 07945810170 |
| L70S | 80 | 080 | L70S080 | L70S080.V | 5 Pcs/ Box | 07945810171 |
| L70S | 90 | 090 | L70S090 | L70S090.V | 5 Pcs/ Box | 07945810172 |
| L70S | 100 | 100 | L70S100 | L70S100.V | 5 Pcs/ Box | 07945810173 |
| L70S | 125 | 125 | L70S125 | L70S125.V | 5 Pcs/ Box | 07945810174 |
| L70S | 150 | 150 | L70S150 | L70S150.V | 5 Pcs/ Box | 07945810175 |
| L70S | 175 | 175 | L70S175 | L70S175.V | 5 Pcs/ Box | 07945810176 |
| L70S | 200 | 200 | L70S200 | L70S200.V | 5 Pcs/ Box | 07945810177 |
| L70S | 225 | 225 | L70S225 | L70S225.V | 5 Pcs/ Box | 07945810188 |
| L70S | 250 | 250 | L70S250 | L70S250.V | 5 Pcs/ Box | 07945810178 |
| L70S | 300 | 300 | L70S300 | L70S300.V | 5 Pcs/ Box | 07945810179 |
| L70S | 350 | 350 | L70S350 | L70S350.V | 5 Pcs/ Box | 07945810180 |
| L70S | 400 | 400 | L70S400 | L70S400.V | 5 Pcs/ Box | 07945810181 |
| L70S | 450 | 450 | L70S450 | L70S450.X | 1 Pc/ Box | 07945810182 |
| L70S | 500 | 500 | L70S500 | L70S500.X | 1 Pc/ Box | 07945810183 |
| L70S | 600 | 600 | L70S600 | L70S600.X | 1 Pc/ Box | 07945810184 |
| L70S | 700 | 700 | L70S700 | L70S700.X | 1 Pc/ Box | 07945810185 |
| L70S | 800 | 800 | L70S800 | L70S800.X | 1 Pc/ Box | 07945810186 |

L70S SERIES HIGH-SPEED FUSE

Electrical Specifications


| CATALOG NUMBER | AMPERAGE RATING | VOLTAGE RATING | | INTERRUPT RATING | | MELTING (PRE-ARC) I ² T (A ² s) | TOTAL CLEARING I ² T (A ² s) | TOTAL CLEARING I ² T (A ² s) | TOTAL CLEARING I ² T (A ² s) | WATTS LOSS AT 100% RATED CURRENT | WATTS LOSS AT 80% RATED CURRENT |
|----------------|-----------------|----------------|-----|------------------|------|---|--|--|--|----------------------------------|---------------------------------|
| | | AC | DC | AC | DC | | 100 kA @ 700 Vac | 200 kA @ 700 Vac | 20 kA @ 650 Vdc | (W) | (W) |
| | | | | | | | | | | | |
| L70S010 | 10 | 700 | 650 | 200kA | 20kA | 21 | 160 | 173 | 346 | 2 | 1 |
| L70S015 | 15 | 700 | 650 | 200kA | 20kA | 34 | 330 | 355 | 270 | 2 | 2 |
| L70S020 | 20 | 700 | 650 | 200kA | 20kA | 48 | 550 | 599 | 300 | 5 | 2 |
| L70S025 | 25 | 700 | 650 | 200kA | 20kA | 62 | 810 | 900 | 340 | 7 | 4 |
| L70S030 | 30 | 700 | 650 | 200kA | 20kA | 77 | 1,130 | 1,220 | 417 | 10 | 5 |
| L70S035 | 35 | 700 | 650 | 200kA | 20kA | 110 | 1,470 | 1,500 | 500 | 12 | 6 |
| L70S040 | 40 | 700 | 650 | 200kA | 20kA | 150 | 1,830 | 2,000 | 660 | 13 | 7 |
| L70S050 | 50 | 700 | 650 | 200kA | 20kA | 250 | 2,670 | 3,200 | 1,070 | 16 | 9 |
| L70S060 | 60 | 700 | 650 | 200kA | 20kA | 380 | 3,646 | 4,674 | 1,572 | 18 | 9 |
| L70S070 | 70 | 700 | 650 | 200kA | 20kA | 545 | 4,800 | 6,000 | 1,970 | 16 | 9 |
| L70S080 | 80 | 700 | 650 | 200kA | 20kA | 745 | 6,180 | 7,550 | 2,380 | 21 | 11 |
| L70S090 | 90 | 700 | 650 | 200kA | 20kA | 990 | 7,650 | 9,250 | 2,830 | 25 | 13 |
| L70S100 | 100 | 700 | 650 | 200kA | 20kA | 1,266 | 9,407 | 11,117 | 3,266 | 29 | 14 |
| L70S125 | 125 | 700 | 650 | 200kA | 20kA | 2,150 | 14,700 | 17,550 | 4,900 | 33 | 17 |
| L70S150 | 150 | 700 | 650 | 200kA | 20kA | 3,280 | 21,250 | 25,700 | 6,800 | 51 | 24 |
| L70S175 | 175 | 700 | 650 | 200kA | 20kA | 4,700 | 28,750 | 34,800 | 9,000 | 63 | 28 |
| L70S200 | 200 | 700 | 650 | 200kA | 20kA | 6,411 | 37,300 | 45,583 | 11,447 | 75 | 33 |
| L70S225 | 225 | 700 | 650 | 200kA | 20kA | 8,000 | 46,500 | 57,000 | 16,000 | 43 | 24 |
| L70S250 | 250 | 700 | 650 | 200kA | 20kA | 9,900 | 58,000 | 69,500 | 22,000 | 49 | 27 |
| L70S300 | 300 | 700 | 650 | 200kA | 20kA | 14,000 | 83,000 | 97,700 | 37,500 | 60 | 33 |
| L70S350 | 350 | 700 | 650 | 200kA | 20kA | 19,000 | 113,000 | 131,000 | 59,000 | 71 | 36 |
| L70S400 | 400 | 700 | 650 | 200kA | 20kA | 24,373 | 147,290 | 169,000 | 87,875 | 107 | 49 |
| L70S450 | 450 | 700 | 650 | 200kA | 20kA | 33,000 | 191,000 | 219,000 | 119,000 | 85 | 47 |
| L70S500 | 500 | 700 | 650 | 200kA | 20kA | 44,200 | 240,000 | 275,000 | 155,000 | 92 | 49 |
| L70S600 | 600 | 700 | 650 | 200kA | 20kA | 72,000 | 370,250 | 405,000 | 246,182 | 106 | 56 |
| L70S700 | 700 | 700 | 650 | 200kA | 20kA | 110,000 | 526,000 | 573,000 | 255,000 | 128 | 67 |
| L70S800 | 800 | 700 | 650 | 200kA | 20kA | 157,082 | 735,330 | 762,333 | 262,949 | 156 | 78 |

L70S SERIES HIGH-SPEED FUSE

Recommended Torque Values For Bus Bar Mounting





| RECOMMENDED TORQUE VALUES FOR BUS BAR MOUNTING FUSE | | |
|---|-------------------------------|---------------------------------|
| CATALOG NUMBER | FUSE TORQUE—METRIC (STANDARD) | HARDWARE SIZE—METRIC (STANDARD) |
| L70S035 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S040 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S050 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S060 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S070 | 8 N m (70.81 in-lb) | M6 (¼") |
| L70S080 | 8 N m (70.81 in-lb) | M6 (¼") |
| L70S090 | 8 N m (70.81 in-lb) | M6 (¼") |
| L70S100 | 8 N m (70.81 in-lb) | M6 (¼") |
| L70S125 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S150 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S175 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S200 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S225 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S250 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S300 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S350 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S400 | 15 N m (132.76 in-lb) | M8 (5/16") |
| L70S450 | 54 N m (477.94 in-lb) | M12 (½") |
| L70S500 | 54 N m (477.94 in-lb) | M12 (½") |
| L70S600 | 54 N m (477.94 in-lb) | M12 (½") |
| L70S700 | 75 N m (663.81 in-lb) | M14 (9/16") |
| L70S800 | 75 N m (663.81 in-lb) | M14 (9/16") |

Temperature De-rating Curve (Temperature of Air Immediately Surrounding Fuse)

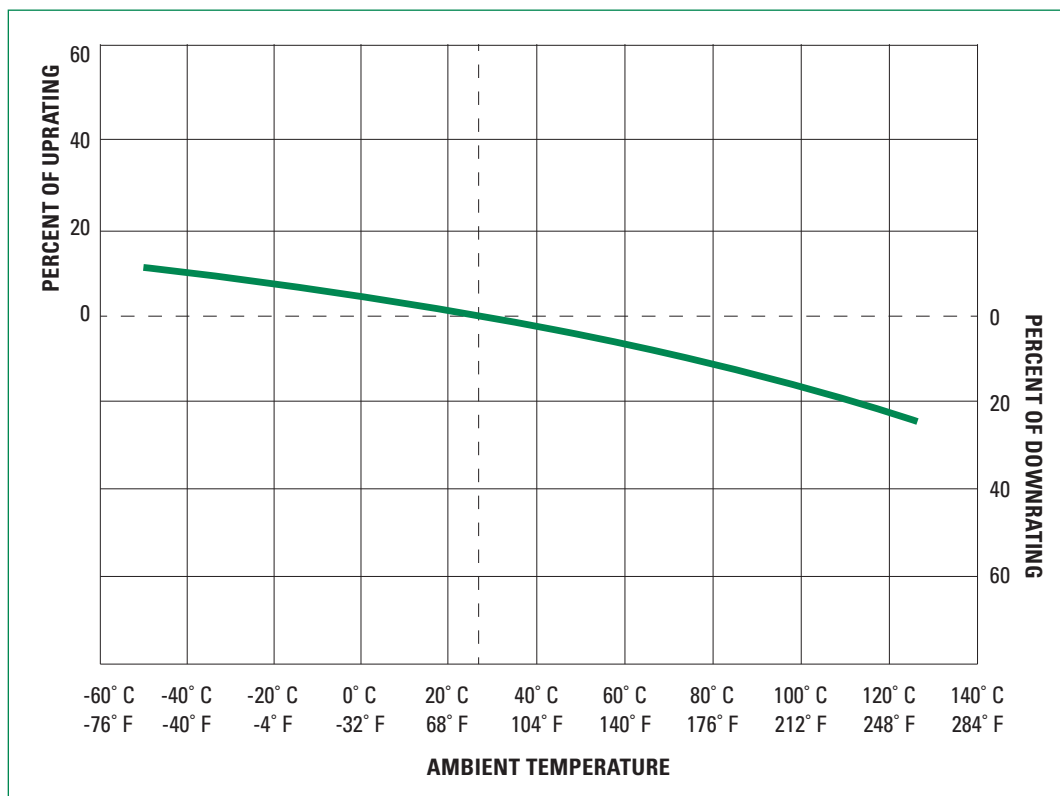


L70S SERIES HIGH-SPEED FUSE

Time Current Curves

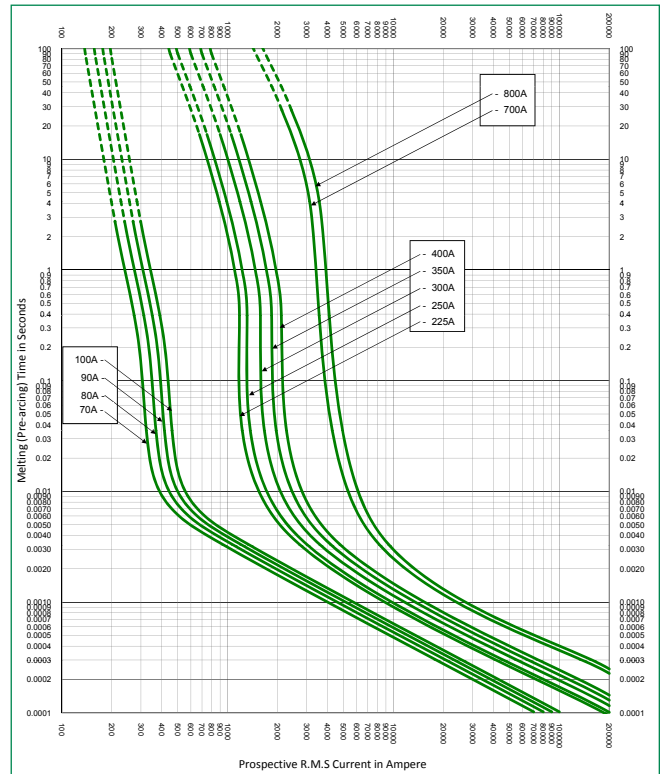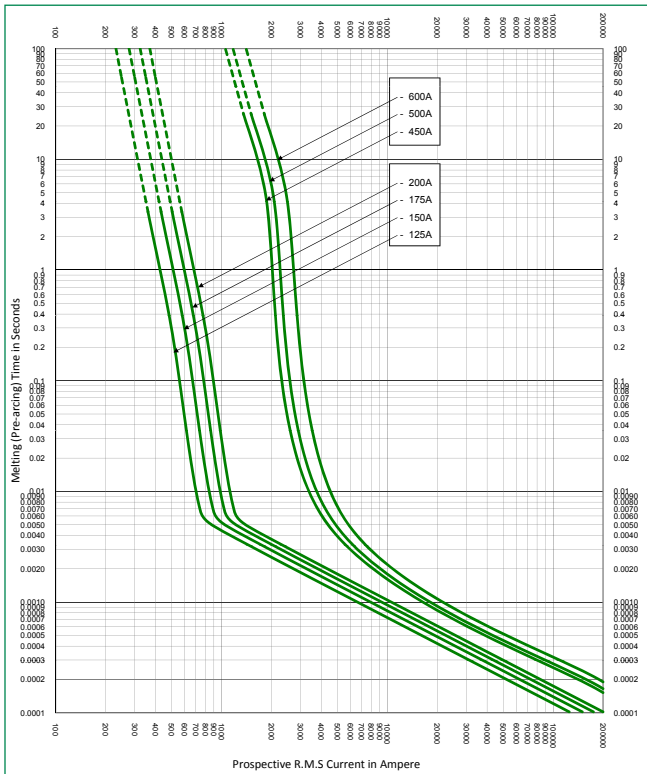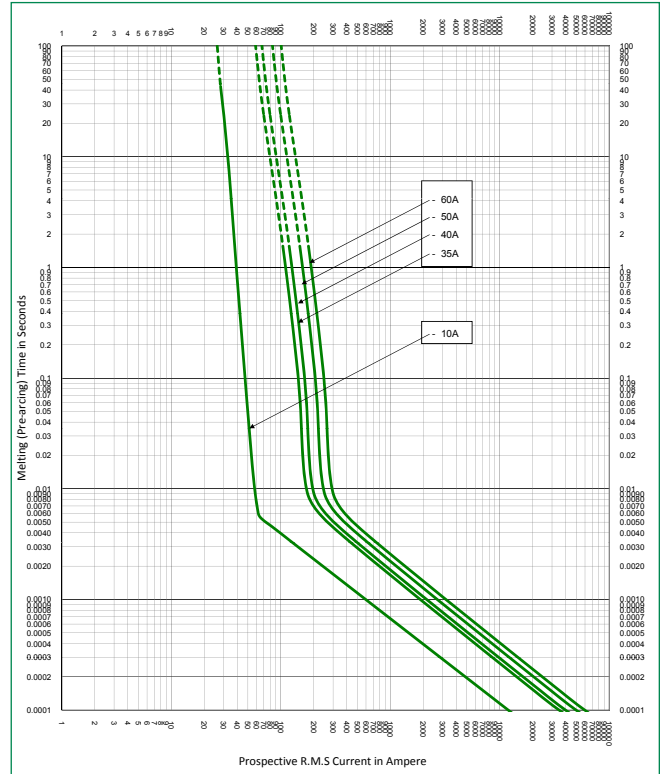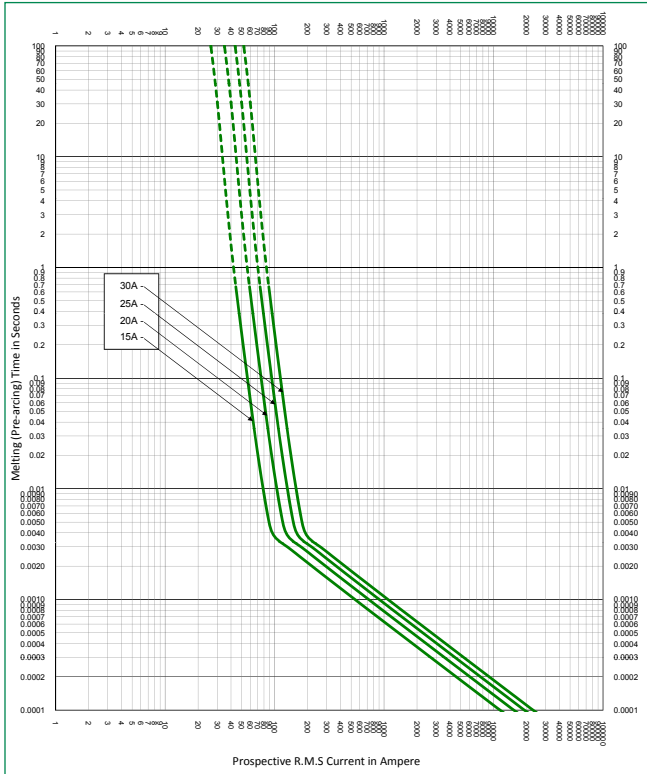


L70S SERIES HIGH-SPEED FUSE


Peak Let-Thru Curve

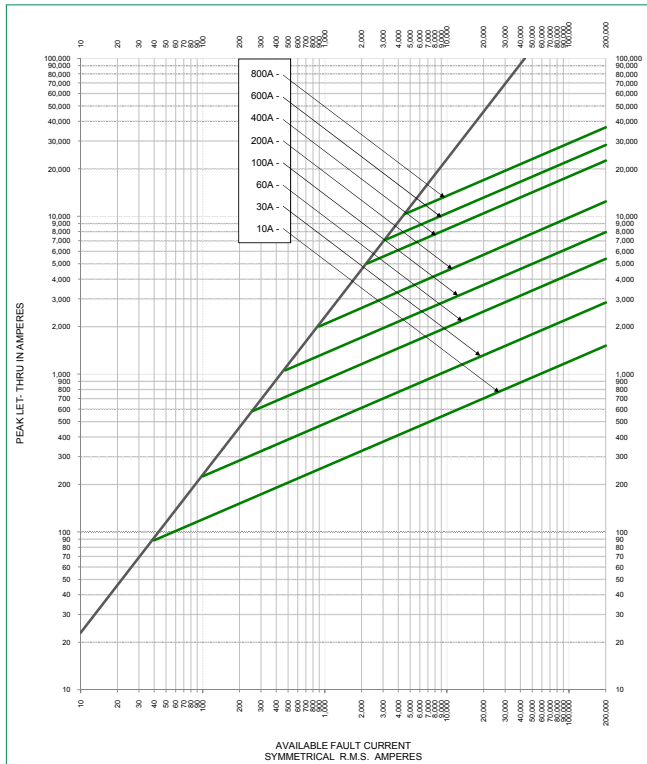


Peak Arc Voltage Curve

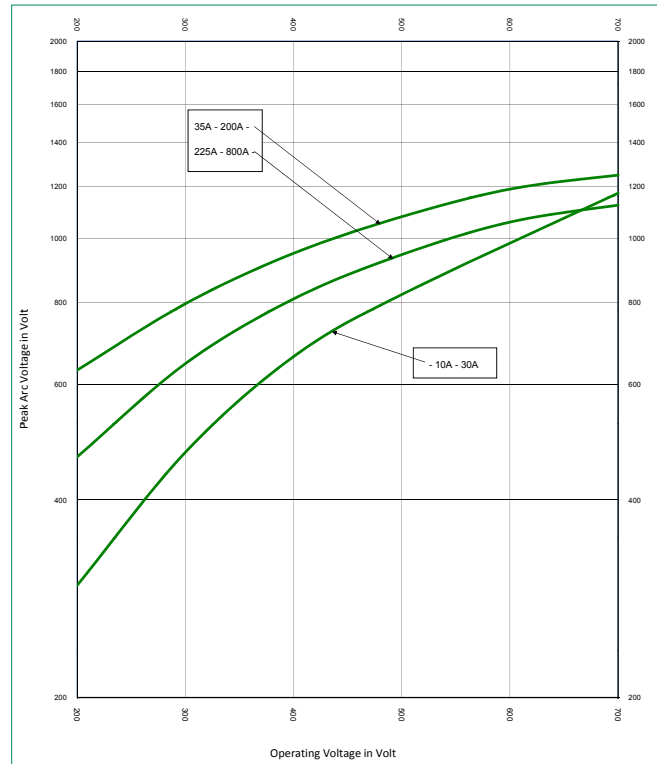

Total Clearing I²t Correction Factor Curve

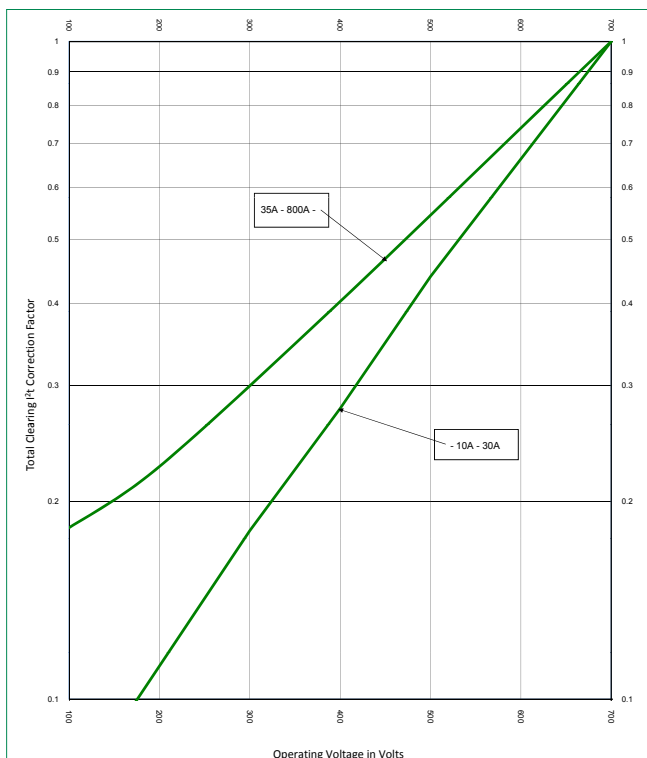

Watts Loss Correction Factor Curve

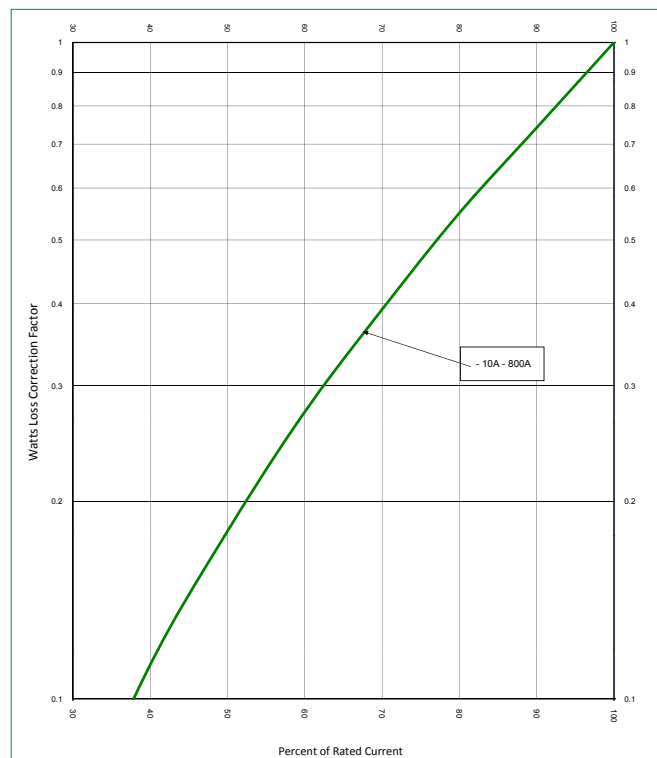

L70S SERIES HIGH-SPEED FUSE

Disclaimer Notice - Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

Littelfuse.com/Product-Disclaimer

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialty Fuses](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[ECF-1](#) [ECF-1/2](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [170M1418](#) [N-2-1/2](#) [N-3-2/10](#) [S-2](#) [2D16](#) [170M1564D](#) [170M4241](#) [ABS-25](#) [ABS-30](#) [ABS-8](#) [FWP-25A14FI](#) [FWP-80A22FI](#) [30CIF06](#) [TJD](#) [TPL-BL](#) [KAB-25](#) [KLC40](#) [WKV](#) [10D27](#) [NITD25](#) [04450080FX850](#) [NITD16](#) [ECF-5](#) [TDC180-10](#) [TPM-25](#) [170M3509](#) [DEO200](#) [004117001](#) [45ET](#) [170M5810D](#) [10H07C](#) [SDL-2](#) [CC12M10A](#) [TDC600-2-R](#) [CBW57-ES-7A-5H](#) [CBW57-HB-15A-P](#) [CBW57-PS-15A-5X](#) [CBW58-HL4-30A-5C](#) [CBW58-HS-15A-5C](#) [CBW58-HS-20A-5C](#) [0AALBK300-BA](#) [170M8211](#) [STD2](#) [STD4](#) [4D27FB](#)