

LA60Q Semiconductor Fuses

600 VAC • Very Fast Acting • 5 - 40 Amperes




Littelfuse LA60Q semiconductor protection fuses feature a 600 volt AC/DC rating in a compact size (1½" x 13/32"). LA60Q also has the lowest I2t of all similar fuses and excellent cycling ability. Applications include inverters and small equipment requiring extremely fast response to faults, without the need to carry sustained heavy overloads.


Features

- Lowest I2t of any fuse this size for greater protection.
- Excellent cycling ability gives advantage in equipment design.

Dimensions (in inches)

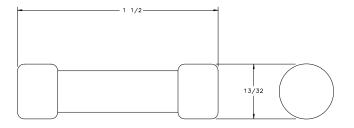

Ordering Information



Mounting Type

Ferrule, midget dim. 1-1/2" x 13/32"

Catalog Numbers & Technical Data

Ampere Rating	Littelfuse Catalog Number	Mounting Type	Maximum Clearing I²t @600 VAC (A²S)	Watts Loss @ Rated Current (W)
5	LA60Q5-2	2	60	0.7
8	LA60Q8-2	2	70	1.1
10	LA60Q10-2	2	110	1.6
12	LA60Q12-2	2	150	2
15	LA60Q15-2	2	180	3
20	LA60Q20-2	2	330	4.4
25	LA60025-2	2	440	5.5
30	LA60Q30-2	2	860	5.6
35	LA60Q35-2	2	1300	6.4
40	LA60Q40-2	2	1800	7

Specifications

AC: 600 volts **Voltage Rating:** DC: 600 volts Interrupting Rating: AC: 200,000 Amperes DC: 100,000 Amperes

Ampere Range: 5 – 40 Amperes

Approvals: UL Recognized under the components program.

Recommended Fuse Blocks

LPSM or L60030M

Contact Littelfuse for characteristic curves.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialty Fuses category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below:

ECF-1 ECF-1/2 ECF-2 ECF-3 ECF-4 170M1418 N-2-1/2 N-3-2/10 S-2 2D16 170M1564D 170M4241 ABS-25 ABS-30 ABS-8 FWP-25A14FI FWP-80A22FI 30CIF06 TJD TPL-BL KAB-25 KLC40 WKV 10D27 NITD25 04450080FX850 NITD16 ECF-5 TDC180-10 TPM-25 170M3509 DEO200 004117001 45ET 170M5810D 10H07C SDL-2 CC12M10A TDC600-2-R CBW57-ES-7A-5H CBW57-HB-15A-P CBW57-PS-15A-5X CBW58-HL4-30A-5C CBW58-HS-15A-5C CBW58-HS-20A-5C 0AALBK300-BA 170M8211 STD2 STD4 4D27FB