


LGB15N41ATI, LGD15N41ATI 410 V, 15 A N-Channel Ignition IGBT




Agency Approvals


Environmental Approvals

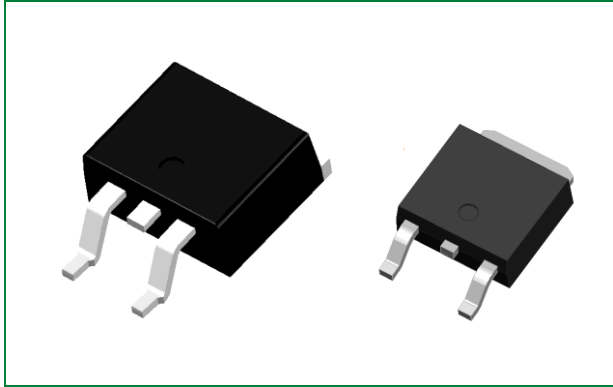

Pinout Diagram

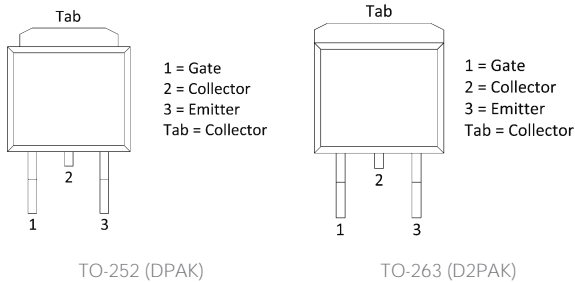

Functional Diagram

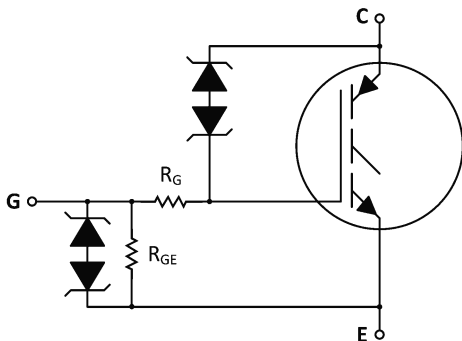

Product Summary

| Characteristic | Value | Unit |
|----------------|-------|------|
| V_{CES} | 410 | V |
| I_C | 15 | A |

Description

This Logic Level Insulated Gate Bipolar Transistor (IGBT) features monolithic circuitry integrating ESD and Over-Voltage clamped protection for use in inductive coil drivers applications. Primary uses include Ignition, Direct Fuel Injection, or wherever high voltage and high current switching is required.

Features

- Ideal for Coil-on-Plug Applications
- DPAK Package Offers Smaller Footprint and Increased Board Space
- Gate-Emitter ESD Protection
- Temperature Compensated Gate-Collector Voltage Clamp Limits Stress Applied to Load
- Integrated ESD Diode Protection
- New Design Increases Unclamped Inductive Switching (UIS) Energy Per Area
- Low Threshold Voltage Interfaces Power Loads to Logic or Microprocessor Devices
- Low Saturation Voltage
- High Pulsed Current Capability
- Optional Gate Resistor (R_G) and Gate-Emitter Resistor (R_{GE})
- AEC-Q101 Qualified
- These are Pb-Free Devices

| | |
|---|----|
| 1. Maximum Ratings ($T_J = 25\text{ }^\circ\text{C}$ unless otherwise specified) | 3 |
| 2. Unclamped Collector-to-Emitter Avalanche Characteristics | 3 |
| 3. Thermal Characteristics | 3 |
| 4. Electrical Characteristics – Off | 4 |
| 5. Electrical Characteristics – On | 4 |
| 6. Dynamic Characteristics | 5 |
| 7. Switching Characteristics | 5 |
| 8. Figure Data | 6 |
| 9. Package Dimensions | 10 |
| 9.1. TO-252 (DPAK) | 10 |
| TO-263 (D2PAK) | 11 |
| 10. Part Numbering and Marking | 11 |
| 10.1. TO-252 (DPAK) | 11 |
| 10.2. TO-263 (D2PAK) | 11 |
| 11. Packing Options | 11 |

1. Maximum Ratings (T_J = 25 °C unless otherwise specified)

| Characteristic | Conditions | Symbol | Value | Unit |
|---|------------------------|-----------------------------------|-------------|-----------------|
| Collector-Emitter Voltage | - | V _{CEs} | 440 | V _{DC} |
| Collector-Gate Voltage | - | V _{CER} | 440 | V _{DC} |
| Gate-Emitter Voltage | - | V _{GE} | 15 | V _{DC} |
| Collector Current – Continuous | T _C = 25 °C | I _C | 15 | A _{DC} |
| Collector Current – Pulsed | | | 50 | A _{AC} |
| ESD – Human Body Model | R = 1500 Ω, C = 100 pF | ESD | 8.0 | kV |
| ESD – Machine Model | R = 0 Ω, C = 200 pF | | 800 | V |
| Total Power Dissipation | T _C = 25 °C | P _D | 107 | W |
| | Derating for > 25 °C | | 0.71 | W/°C |
| Operating and Storage Temperature Range | - | T _J , T _{stg} | -55 to +175 | °C |

2. Unclamped Collector-to-Emitter Avalanche Characteristics

| Characteristic | Symbol | Value | Unit |
|---|-----------------|-------|------|
| Single Pulse Collector-to-Emitter Avalanche Energy | | | |
| V _{CC} = 50 V, V _{GE} = 5.0 V, P _{kL} = 16.6 A, L = 1.8 mH, Starting T _C = 25 °C | E _{AS} | 250 | mJ |
| V _{CC} = 50 V, V _{GE} = 5.0 V, P _{kL} = 15.0 A, L = 1.8 mH, Starting T _C = 125 °C | | 200 | |

Note: -55 °C ≤ T_J ≤ 150 °C

3. Thermal Characteristics

| Characteristic | Symbol | Value | Unit |
|---|------------------|-------|------|
| Thermal Resistance, Junction to Case | R _{θJC} | 1.4 | °C/W |
| Thermal Resistance, Junction to Ambient (DPAK) ¹ | R _{θJA} | 100 | °C/W |
| Thermal Resistance, Junction to Ambient (D2PAK) ¹ | R _{θJA} | 50 | °C/W |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 5 seconds | T _L | 275 | °C |

Footnote 1: When surface mounted to an FR4 board using the minimum recommended pad size

4. Electrical Characteristics – Off

| Characteristic | Symbol | Conditions | Temperature | Value | | | Unit |
|---|----------------------|--|-----------------------------------|-------|-----|-----------------|------------------|
| | | | | Min | Typ | Max | |
| Collector-Emitter Clamp Voltage | BV _{CES} | I _C = 2.0 mA | T _J = -40 °C to 150 °C | 380 | 410 | 440 | V _{DC} |
| | | I _C = 10 mA | | 380 | 410 | 440 | |
| Zero Gate Voltage Collector Current | I _{CES} | V _{CE} = 350 V, V _{GE} = 0 V | T _J = 25 °C | - | 2.0 | 20 | μA _{DC} |
| | | | T _J = 150 °C | - | 10 | 40 ² | |
| | | | T _J = -40 °C | - | 1.0 | 10 | |
| Reverse Collector-Emitter Leakage Current | I _{ECs} | V _{CE} = -24 V | T _J = 25 °C | - | 0.7 | 2.0 | mA |
| | | | T _J = 150 °C | - | 12 | 25 ² | |
| | | | T _J = -40 °C | - | 0.1 | 1.0 | |
| Reverse Collector-Emitter Clamp Voltage | BV _{CES(R)} | I _C = -75 mA | T _J = 25 °C | 27 | 33 | 37 | V _{DC} |
| | | | T _J = 150 °C | 30 | 36 | 40 | |
| | | | T _J = -40 °C | 25 | 31 | 35 | |
| Gate-Emitter Clamp Voltage | BV _{GES} | I _G = 5.0 mA | T _J = -40 °C to 150 °C | 11 | 13 | 15 | V _{DC} |
| Gate-Emitter Leakage Current | I _{GES} | V _{GE} = ±10 V | T _J = -40 °C to 150 °C | 384 | 640 | 1000 | μA _{DC} |
| Gate Resistor | R _{GE} | - | T _J = -40 °C to 150 °C | - | 70 | - | Ω |
| Gate-Emitter Resistor | R _{GE} | - | T _J = -40 °C to 150 °C | 10 | 16 | 26 | kΩ |

Footnote 2: Maximum value of characteristic across temperature range

5. Electrical Characteristics – On

| Characteristic | Symbol | Conditions | Temperature | Value | | | Unit |
|--|-------------------------|--|-----------------------------------|------------------|------|------------------|-----------------|
| | | | | Min | Typ | Max | |
| Gate Threshold Voltage | V _{GE(th)} | I _C = 1.0 mA, V _{GE} = V _{CE} | T _J = 25 °C | 1.1 | 1.4 | 1.9 | V _{DC} |
| | | | T _J = 150 °C | 0.75 | 1.0 | 1.4 | |
| | | | T _J = -40 °C | 1.2 | 1.6 | 2.1 ² | |
| Threshold Temperature Coefficient (Negative) | - | - | - | - | 3.4 | - | mV/°C |
| Collector-Emitter On-Voltage ³ | V _{CE(on)} | I _C = 6.0 A, V _{GE} = 4.0 V | T _J = 25 °C | 1.0 | 1.6 | 1.8 | V _{DC} |
| | | | T _J = 150 °C | 0.9 | 1.5 | 1.8 | |
| | | | T _J = -40 °C | 1.1 | 1.65 | 1.9 ² | |
| | | I _C = 8.0 A, V _{GE} = 4.0 V | T _J = 25 °C | 1.3 | 1.8 | 2.0 ² | |
| | | | T _J = 150 °C | 1.2 | 1.7 | 1.9 | |
| | | | T _J = -40 °C | 1.4 | 1.8 | 2.0 ² | |
| | | I _C = 10 A, V _{GE} = 4.0 V | T _J = 25 °C | 1.4 | 2.0 | 2.2 | |
| | | | T _J = 150 °C | 1.5 | 2.0 | 2.3 ² | |
| | | | T _J = -40 °C | 1.4 | 2.0 | 2.2 | |
| I _C = 10 A, V _{GE} = 4.5 V | T _J = 25 °C | 1.3 | 1.9 | 2.1 | | | |
| | T _J = 150 °C | 1.3 | 1.9 | 2.1 | | | |
| | T _J = -40 °C | 1.4 | 1.95 | 2.1 ² | | | |
| Forward Transconductance ⁵ | gfs | V _{CS} = 5.0 V, I _C = 6.0 A | T _J = -40 °C to 150 °C | 8.0 | 15 | 25 | Mhos |

Footnote 2: Maximum value of characteristic across temperature range

Footnote 3: Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%

6. Dynamic Characteristics

| Characteristic | Symbol | Conditions | Temperature | Value | | | Unit |
|----------------------|-----------|--|---|-------|-----|------|------|
| | | | | Min | Typ | Max | |
| Input Capacitance | C_{ISS} | $V_{CC} = 25\text{ V}, V_{GE} = 0\text{ V},$ $f = 1.0\text{ MHz}$ | $T_J = -40\text{ }^\circ\text{C to } 150\text{ }^\circ\text{C}$ | 400 | 650 | 1000 | pF |
| Output Capacitance | C_{OSS} | | | 30 | 55 | 100 | |
| Transfer Capacitance | C_{RSS} | | | 3.0 | 4.5 | 8.0 | |

7. Switching Characteristics

| Characteristic | Symbol | Conditions | Temperature | Value | | | Unit |
|---------------------------------|--------------|--|-----------------------------------|-------|-----|-----|---------------|
| | | | | Min | Typ | Max | |
| Turn-on Delay Time (Inductive) | $t_{d(on)}$ | $V_{CC} = 300\text{ V}, I_C = 6.5\text{ A},$ $R_G = 1.0\text{ k}\Omega, L = 300\text{ }\mu\text{H}$ | $T_J = 25\text{ }^\circ\text{C}$ | - | 4.0 | 10 | μs |
| | | | $T_J = 150\text{ }^\circ\text{C}$ | - | 4.5 | 10 | |
| Fall Time (Inductive) | t_f | $V_{CC} = 300\text{ V}, I_C = 6.5\text{ A},$ $R_G = 1.0\text{ k}\Omega, L = 300\text{ }\mu\text{H}$ | $T_J = 25\text{ }^\circ\text{C}$ | - | 6.0 | 12 | μs |
| | | | $T_J = 150\text{ }^\circ\text{C}$ | - | 10 | 12 | |
| Turn-off Delay Time (Resistive) | $t_{d(off)}$ | $V_{CC} = 300\text{ V}, I_C = 6.5\text{ A},$ $R_G = 1.0\text{ k}\Omega, R_L = 46\text{ }\Omega$ | $T_J = 25\text{ }^\circ\text{C}$ | - | 3.0 | 10 | μs |
| | | | $T_J = 150\text{ }^\circ\text{C}$ | - | 3.5 | 10 | |
| Fall Time (Resistive) | t_f | $V_{CC} = 300\text{ V}, I_C = 6.5\text{ A},$ $R_G = 1.0\text{ k}\Omega, R_L = 46\text{ }\Omega$ | $T_J = 25\text{ }^\circ\text{C}$ | - | 8.0 | 15 | μs |
| | | | $T_J = 150\text{ }^\circ\text{C}$ | - | 12 | 15 | |
| Turn-off Delay Time (Inductive) | $t_{d(off)}$ | $V_{CC} = 10\text{ V}, I_C = 6.5\text{ A},$ $R_G = 1.0\text{ k}\Omega, R_L = 1.5\text{ }\Omega$ | $T_J = 25\text{ }^\circ\text{C}$ | - | 0.7 | 4.0 | μs |
| | | | $T_J = 150\text{ }^\circ\text{C}$ | - | 0.7 | 4.0 | |
| Rise Time | t_r | $V_{CC} = 10\text{ V}, I_C = 6.5\text{ A},$ $R_G = 1.0\text{ k}\Omega, R_L = 1.5\text{ }\Omega$ | $T_J = 25\text{ }^\circ\text{C}$ | - | 4.0 | 7.0 | μs |
| | | | $T_J = 150\text{ }^\circ\text{C}$ | - | 5.0 | 7.0 | |

8. Figure Data

Figure 1. Output Characteristics ($T_J = 25\text{ }^\circ\text{C}$)

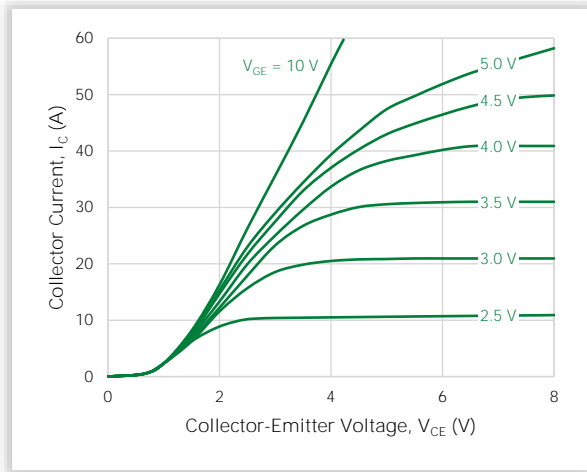


Figure 2. Output Characteristics ($T_J = -40\text{ }^\circ\text{C}$)

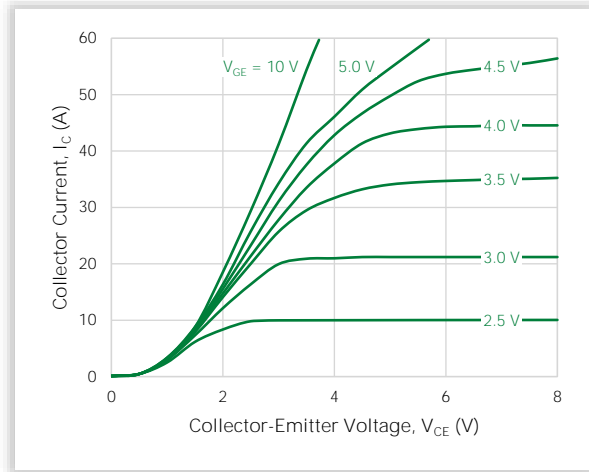


Figure 3. Output Characteristics ($T_J = 150\text{ }^\circ\text{C}$)

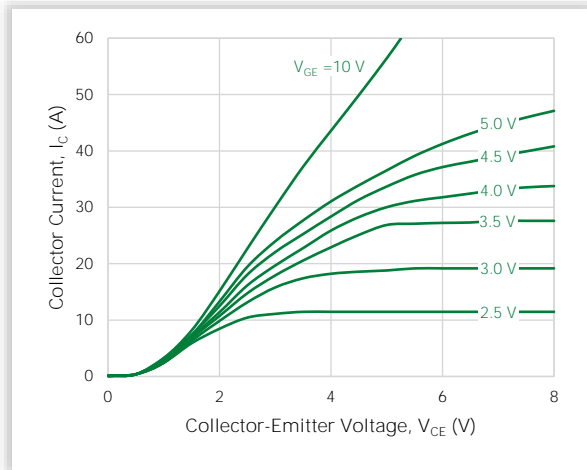


Figure 4. Transfer Characteristics

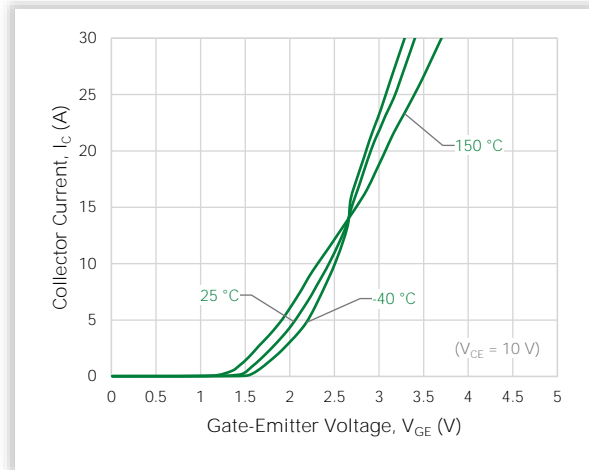


Figure 5. Collector-Emitter Saturation Voltage vs. Junction Temperature

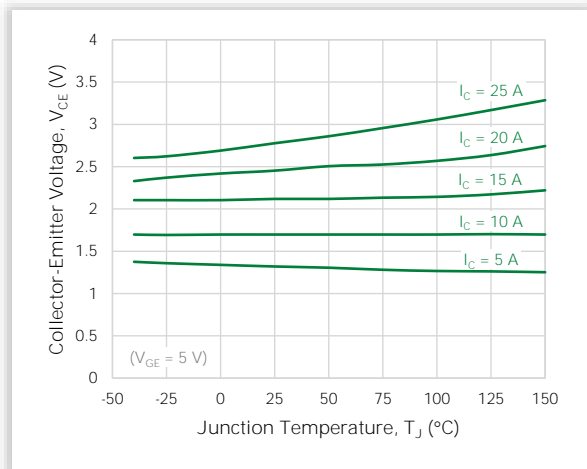


Figure 6. Collector-Emitter Voltage vs. Gate-Emitter Voltage ($T_J = 25\text{ }^\circ\text{C}$)

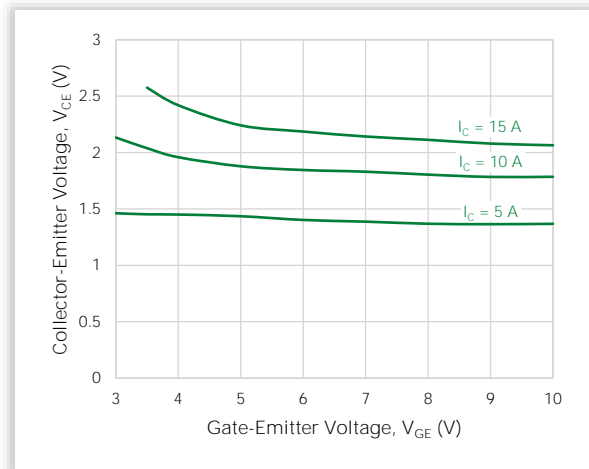


Figure 7. Collector-Emitter Voltage vs. Gate-Emitter Voltage ($T_J = 150^\circ\text{C}$)

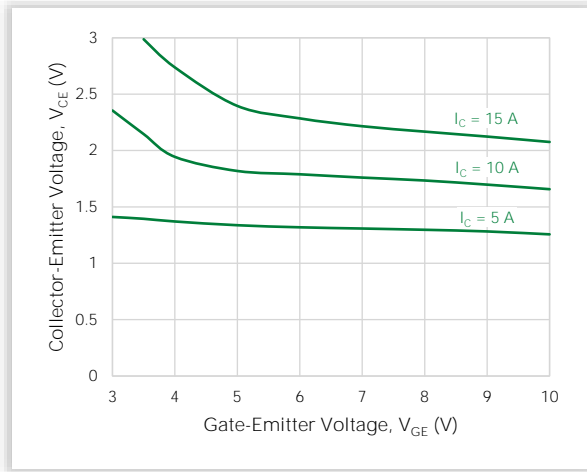


Figure 8. Capacitance Variation

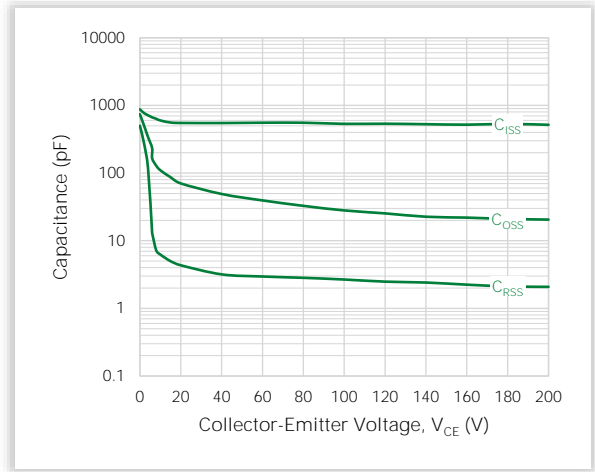


Figure 9. Gate Threshold Voltage vs. Temperature

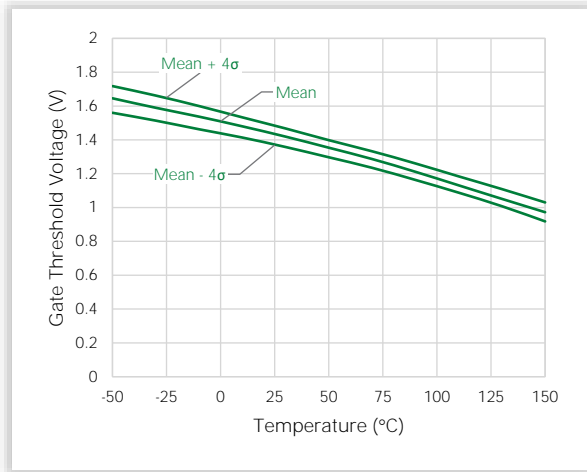


Figure 10. Minimum Open Secondary Latch Current vs. Temperature

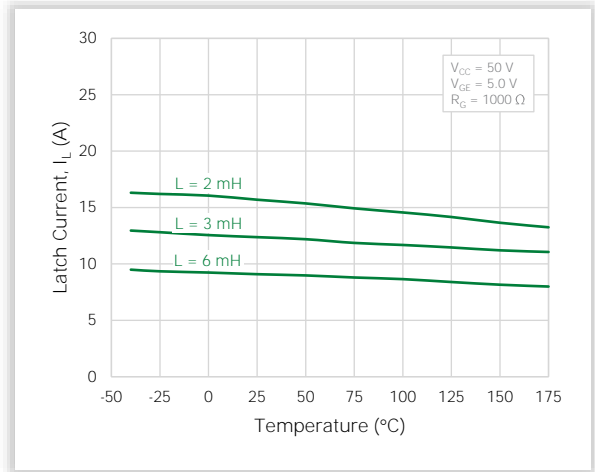


Figure 11. Typical Open Secondary Latch Current vs. Temperature

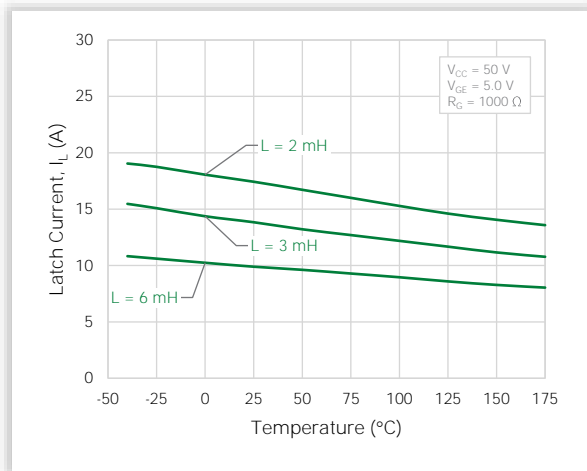


Figure 12. Inductive Switching Fall Time vs. Temperature

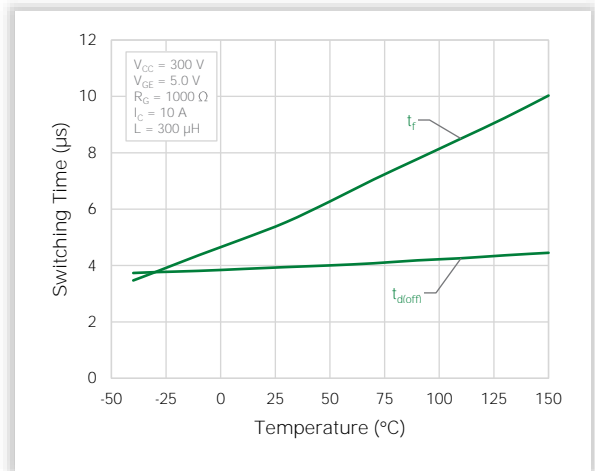


Figure 13. Transient Thermal Resistance

(Non-normalized Junction-to-Ambient mounted on fixture in Figure 14)

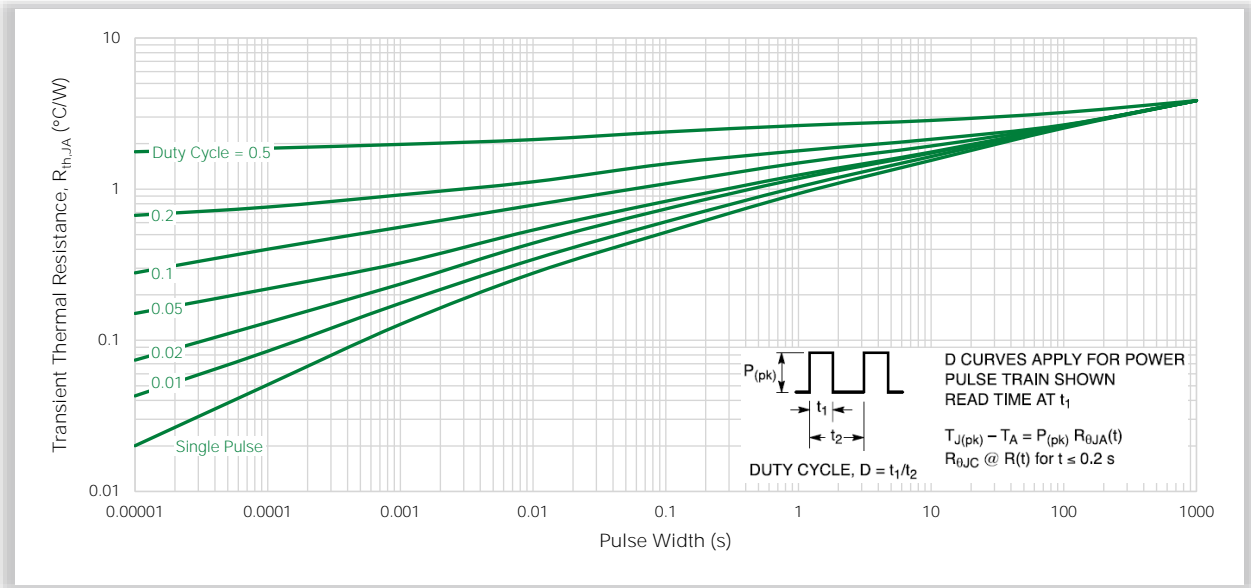


Figure 14. Test Fixture for Transient Thermal Curve

(48 square inches of 1/8" thick aluminum)

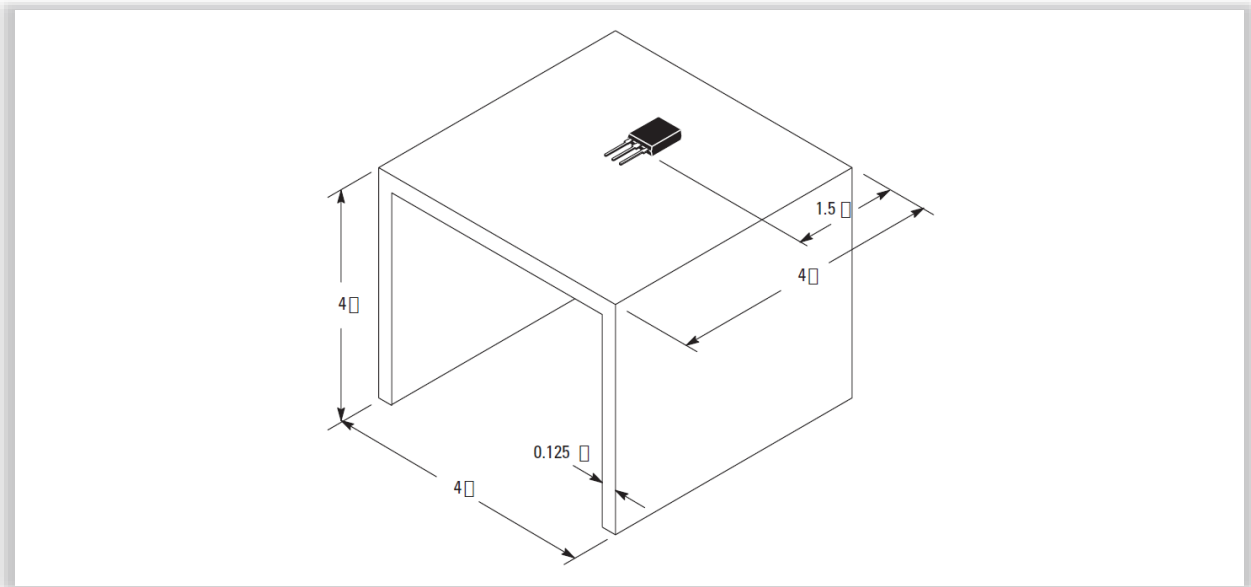


Figure 15. Single Pulse Safe Operating Area

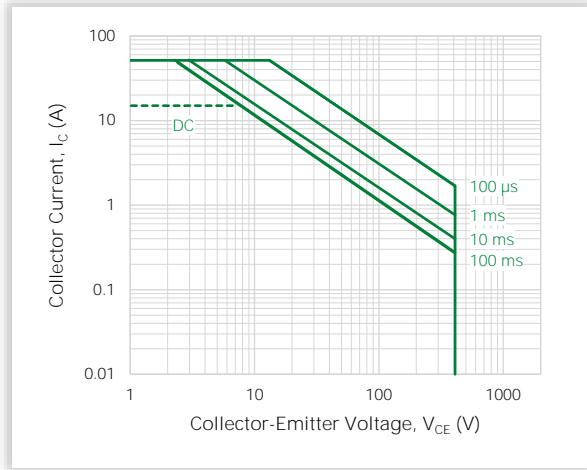
 (Mounted on an Infinite Heatsink at $T_A = 25^\circ\text{C}$)


Figure 16. Single Pulse Safe Operating Area

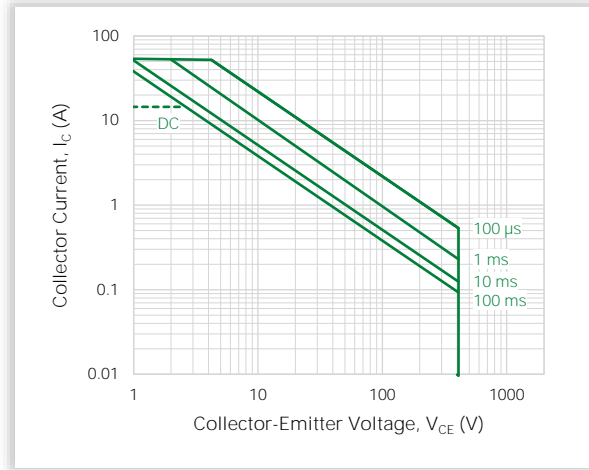
 (Mounted on an Infinite Heatsink at $T_A = 125^\circ\text{C}$)


Figure 17. Pulse Train Safe Operating Area




 (Mounted on an Infinite Heatsink at $T_A = 25^\circ\text{C}$)


Figure 18. Pulse Train Safe Operating Area


 (Mounted on an Infinite Heatsink at $T_A = 125^\circ\text{C}$)


9. Package Dimensions

9.1. TO-252 (DPAK)

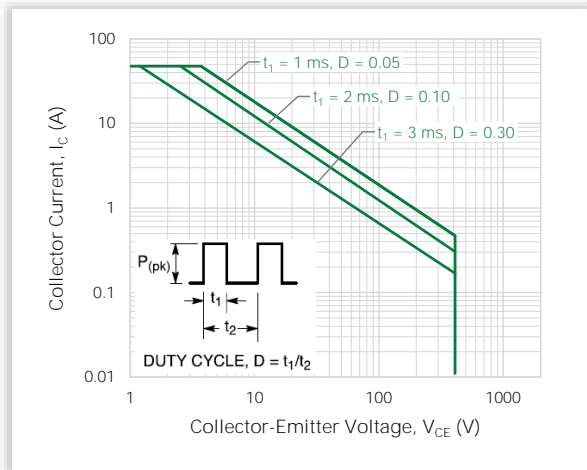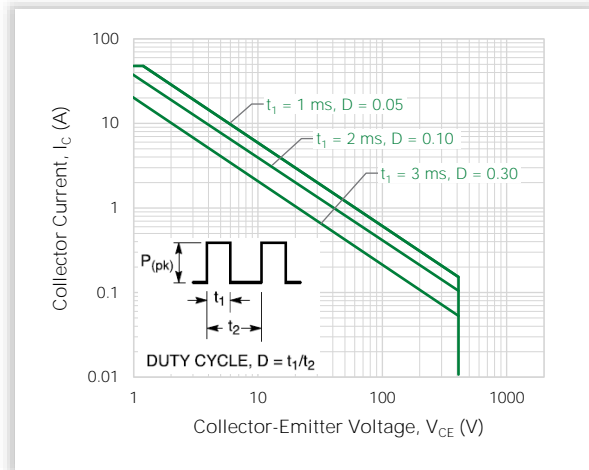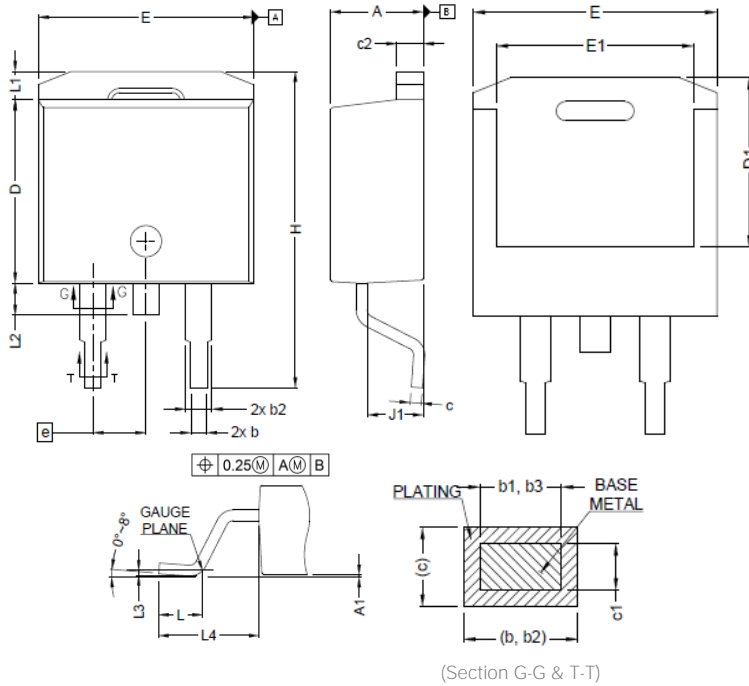

Recommended Solder Pad Layout:




Notes:


1. Dimensioning & tolerancing confirm to ASME Y14.5M-1994.
2. All dimensions are in millimeters. Angles are in degrees.
3. Heatsink side flash is max 0.8 mm.
4. Radius on terminal is optional

| Symbol | Millimeters | | |
|--------|-------------|-----|--------|
| | Min | Nom | Max |
| A | 4.360 | - | 4.560 |
| A1 | 0.000 | - | 0.250 |
| b | 0.700 | - | 0.900 |
| b1 | 0.510 | - | 0.890 |
| b2 | 1.200 | - | 1.460 |
| b3 | 1.170 | - | 1.370 |
| c | 0.380 | - | 0.694 |
| c1 | 0.380 | - | 0.534 |
| c2 | 1.190 | - | 1.340 |
| D | 8.600 | - | 9.000 |
| D1 | 6.900 | - | 7.500 |
| E | 10.150 | - | 10.550 |
| E1 | 8.100 | - | 8.700 |
| e | 2.540 BSC | | |
| H | 15.000 | - | 15.600 |
| L | 1.900 | - | 2.500 |
| L1 | - | - | 1.650 |
| L2 | - | - | 1.780 |
| L3 | 0.250 | | |
| L4 | 4.780 | - | 5.280 |
| J1 | 2.560 | - | 2.960 |

TO-263 (D2PAK)

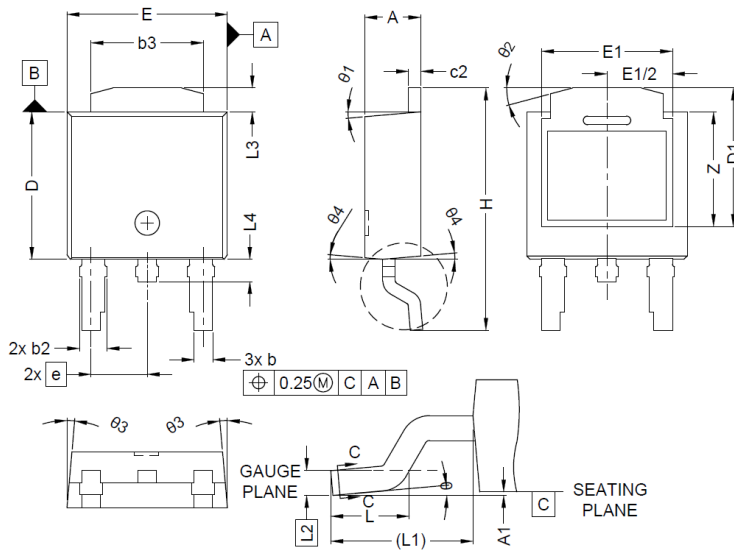

Recommended Solder Pad Layout:

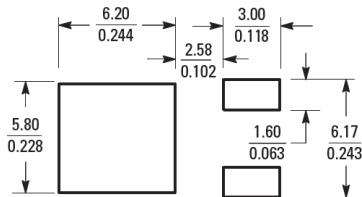


Notes:

5. DIMENSIONING & TOLERANCING CONFIRM TO ASME Y14.5M-1994.
6. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
7. HEAT SINK SIDE FLASH IS MAX. 0.8mm .
8. RADIUS ON TERMINAL IS OPTIONAL.

| Symbol | Millimeters | | |
|--------|-------------|-----|-------|
| | Min | Nom | Max |
| A | 2.18 | - | 2.38 |
| A1 | 0.00 | - | 0.13 |
| b | 0.63 | - | 0.89 |
| b2 | 0.72 | - | 1.14 |
| b3 | 4.57 | - | 5.46 |
| c | 0.46 | - | 0.61 |
| c2 | 0.46 | - | 0.61 |
| D | 5.97 | - | 6.22 |
| D1 | 5.45 | - | 5.85 |
| E | 6.35 | - | 6.73 |
| E1 | 5.14 | - | 5.54 |
| e | 2.29 BSC | | |
| H | 9.40 | - | 10.41 |
| L | 1.40 | - | 1.78 |
| L1 | 2.90 REF | | |
| L2 | 0.51 BSC | | |
| L3 | 0.89 | - | 1.27 |
| L4 | - | - | 1.01 |
| Z | 3.93 | - | - |
| θ | 0° | - | 10° |
| θ1 | 0° | - | 10° |
| θ2 | 10° | - | 20° |
| θ3 | 0° | - | 10° |
| θ4 | 0° | - | 10° |


10. Part Numbering and Marking

10.1. TO-252 (DPAK)



GD15N41A = Device Code
 A = Assembly Location
 XX = Lot Number
 Y = Year
 WW = Work Week

10.2. TO-263 (D2PAK)



GB15N41A = Device Code
 A = Assembly Location
 XX = Lot Number
 Y = Year
 WW = Work Week

11. Packing Options

| Part Number | Package | Packing Mode | M.O.Q. |
|-------------|-----------------|--------------|--------|
| LGD15N41ATI | DPAK (Pb-Free) | Tape & Reel | 2500 |
| LGB15N41ATI | D2PAK (Pb-Free) | Tape & Reel | 800 |

For additional information please visit

www.Littelfuse.com/powersemi

Disclaimer Notice - Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly forth in applicable Littelfuse product documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation.

Read complete Disclaimer Notice at

www.littelfuse.com/disclaimer-electronics

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IGBT Transistors category](#):

Click to view products by [Littelfuse manufacturer](#):

Other Similar products are found below :

[748152A](#) [APT20GT60BRDQ1G](#) [NGTB10N60FG](#) [IGP30N60H3XKSA1](#) [STGFW20V60DF](#) [APT30GP60BG](#) [APT45GR65B2DU30](#)
[GT50JR22\(STA1ES\)](#) [TIG058E8-TL-H](#) [VS-CPV364M4KPBF](#) [NGTB25N120FL2WAG](#) [NGTG40N120FL2WG](#) [RJH60F3DPQ-A0#T0](#)
[APT40GR120B2SCD10](#) [APT15GT120BRG](#) [APT20GT60BRG](#) [NGTB75N65FL2WAG](#) [NGTG15N120FL2WG](#) [APT70GR65B2DU40](#)
[NTE3320](#) [FGD3440G2-F085](#) [APT70GR120J](#) [APT35GP120JDQ2](#) [IKFW40N65ES5XKSA1](#) [IMBG120R220M1HXTMA1](#) [XD15H120CX1](#)
[IGW30N60H3FKSA1](#) [STGWA8M120DF3](#) [IGW08T120FKSA1](#) [IGB30N60H3ATMA1](#) [IGW100N60H3FKSA1](#) [IGW75N60H3FKSA1](#)
[HGTG40N60B3](#) [IRGS4715DPBF](#) [FGH60N60SMD_F085](#) [FGH75T65UPD](#) [STGWA15H120F2](#) [IKA10N60TXKSA1](#) [IHW20N120R5XKSA1](#)
[IKW25N120T2FKSA1](#) [IHW20N65R5XKSA1](#) [IDW40E65D2FKSA1](#) [STGWT60H65FB](#) [STGWT60H65DFB](#) [STGWT40V60DF](#)
[STGWT20V60DF](#) [STGB10NB37LZT4](#) [FGH40T70SHD-F155](#) [FGD3245G2_F085](#) [NGTB40N65IHL2WG](#)