# POWR-GARD<sup>®</sup> Fuse Datasheet

LVSP Surge Suppression Fuse

### 600 V ac • 5-100 kA



# Description

The Littelfuse Varistor Protection (LVSP) Fuses are intended for the protection of TVSS products. The LVSP series has been designed to survive the  $8 \times 20 \ \mu s$  lightning surges described in various standards (UL 1449, IEC 61000-4-5 and IEEE C62.41) without opening. This allows the TVSS to perform the necessary suppression. The LVSP is not rated for continuous current and the ratings are specific  $8 \times 20 \ \mu s$ surge capability. The LVSP series can be used to facilitate TVSS module compliance to UL 1449 in permanently connected applications (abnormal overvoltage, unlimited current conditions).

# **Features/Benefits**

- Very current limiting under AC short-circuit conditions
- Available in multiple mounting configurations (cartridge, bolt-in, PC board mount)
- Provides short circuit protection in TVSS systems and complements the Littelfuse line of overvoltage products (HA, HB34, TMOV<sup>®</sup> and iTMOV<sup>®</sup> varistors as well as the AK-10 series TVS diodes)

## **Applications**

- TVSS products
- Surge arrestors


## **Electrical Specifications**

# Specifications

Voltage Rating
Interrupting Rating
Ratings
Approvals
Environmental

600 V ac 200 kA 5 – 100 kA 8 x 20 µs surge withstand UL Recognized (File: E71611) RoHs Compliant

# Part Numbering System



Mounting Options X2 = Cartridge XR = Leaded Blank = Bolt-In

#### – Package Quantity T = 10

H = 100 (cartridge & leaded only)

SERIES	SURGE RATING	RATING CODE	PACKAGE QUANTITY	MOUNTING METHOD	CATALOG NUMBER	ORDERING NUMBER
LVSP	5	0005	10	CARTRIDGE	LVSP05-2	LVSP0005TX2
LVSP	15	0015	10	CARTRIDGE	LVSP15-2	LVSP0015TX2
LVSP	20	0020	100	LEADED	LVSP20-R	LVSP0020HXR
LVSP	80	0800	10	BOLT-IN	LVSP80	LVSP0080T

# **Recommended Fuse Blocks**

### LVSP (5-20)-2

L60030M (open block) • LPSM (dead front)

### LVSP (30-80)-2

LFJ60030 (open block) • LFPSJ30 (dead front)

LVSP (100)

LFJ60100 (open block)

### Web Resources

Download other technical information: **littelfuse.com/lvsp** 

ing Ing De Age		AGE G (A)	3 (A) RUPT (kA)	CARTRIDGE		LEADED		BOLT-IN		8 X 20 µS	NOMINAL	NOMINAL	lpeak@100 kA
SUR RATI	SURGE RATING RATING CODE VOLTAGE RATING (4	VOLTA( RATING	INTERRUPT RATING (ka	CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER	CATALOG NUMBER	ORDERING NUMBER	SURGE RATING	MELTING I <sup>2</sup> T (A <sup>2</sup> S)	CLEARING I <sup>2</sup> T (A <sup>2</sup> S)	60 HZ (A)
5	0005	600	200	LVSP5-2	LVSP0005TX2	LVSP5-R	LVSP0005TXR	-	-	5,000	359	981	3,700
10	0010	600	200	LVSP10-2	LVSP0010TX2	LVSP10-R	LVSP0010TXR	-	-	10,000	1,300	3,210	5,823
15	0015	600	200	LVSP15-2	LVSP0015TX2	LVSP15-R	LVSP0015TXR	-	-	15,000	3,267	6,235	7,765
20	0020	600	200	LVSP20-2	LVSP0020TX2	LVSP20-R	LVSP0020TXR	-	-	20,000	4,940	11,710	8,135
30	0030	600	200	LVSP30-2	LVSP0030TX2	-	-	LVSP30	LVSP0030T	30,000	11,950	35,325	12,478
40	0040	600	200	LVSP40-2	LVSP0040TX2	-	-	LVSP40	LVSP0040T	40,000	20,550	61,700	15,250
60	0060	600	200	LVSP60-2	LVSP0060TX2	-	-	LVSP60	LVSP0060T	60,000	39,240	145,555	19,604
80	0080	600	200	LVSP80-2	LVSP0080TX2	-	-	LVSP80	LVSP0080T	80,000	75,000	254,000	24,600
100	0100	600	200	-	-	-	-	LVSP100-L	LVSP0100VXL	100,000	160,747	413,000	36,600







# **Dimensions Inches (mm)**




Leaded 5-20 A


Cartridge 30-80 A






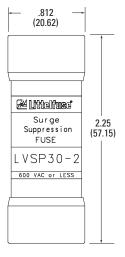

### Bolt-In 30-80 A

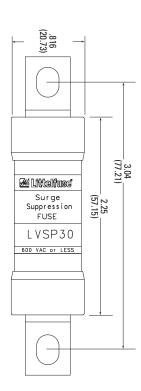

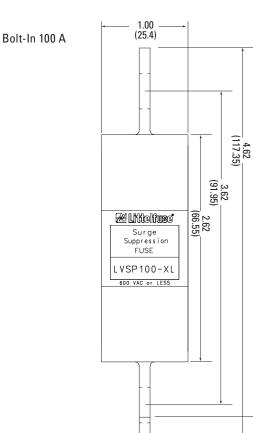

Disclaimer Notice – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialty Fuses category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below :

63NZ02GL 80NH00GR-6 FWP-32A14F 12LCT ECF-1 ECF-2 ECF-3 ECF-4 170M3809D N-2-1/2 N-3-2/10 NITD2 16D27SB 16FC 170M1564D 170M4241 ESD63 ABS-30 ABS-8 FWP-25A14FI FWP-80A22FI 30CIF06 32CMLC 32NH00AM-6 TDC180-2 TPL-BL TPS-5 KLC40 WKL NITD25 04450080FX850 NITD16 LA60Q152 LA60Q402 ECF-5 TDC180-10 TDC180-7 TPM-25 3AG-312 16NHG000B 170M3509 DEO200 DD200M250 BP/S-6-1/4 170M3510 TPH-300 EFS200 170M0161 170M6016 BK/F02B-1/2A