

MM Series LL-31 MicroMELF Thermistors




Description

Littelfuse LL-31 “MicroMELF” style glass encapsulated surface mount thermistors are manufactured using super stable NTC chips which are hermetically sealed in a glass package. The result is a device which exhibits excellent long-term reliability and stability even when subjected to severe environmental or thermal conditions. Their uniform dimensions make them especially suitable for use with automatic insertion equipment.

Options

- Non-standard resistance values and tolerances
- Point matched at specified temperatures
- Tape and Reel Packaging

Dimensions

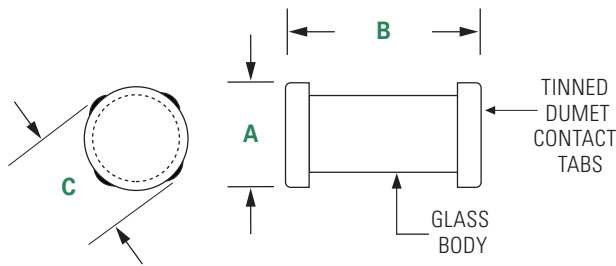


Dimensions shown in inches.

A	B	C
0.049" ± 0.004"	0.075" ± 0.008"	0.053" Nom

Features

- High temperature capability to +220°C
- Surface mountable
- Hermetically sealed glass package
- Low cost
- Excellent long-term stability

Part Numbering System

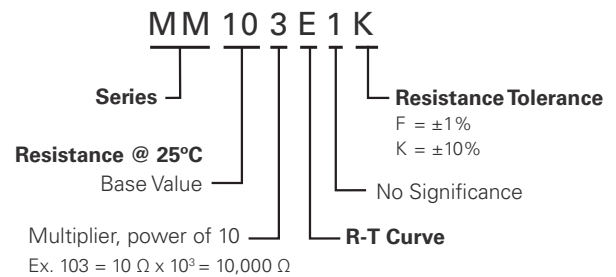

Note: Not all combinations of Part Number codes are available. Contact Littelfuse for details.

MM Series LL-31 MicroMELF Thermistors

Specifications

Part Number	Resistance Ohms @25°C	*Resistance Tol. ± % @ 25°C	Accuracy (±°C) 0-50°C	R-T Curve	Temperature Coefficient (% / °C) @ 25°C	Beta (K) 0-50°C	Dissipation Constant, Nominal (mW/°C)	Thermal Time Constant, Max. - Still Air (seconds)	Temperature Rating (°C)
MM222E1K	2186	10	±0.5°C	E1	-3.82	3320	1	5	-55 to +220
MM302F1K	3000	10	±0.5°C	F	-3.86	3419	1	5	-55 to +220
MM502F1K	5000	10	±0.5°C	F	-3.86	3419	1	5	-55 to +220
MM103E1K	10000	10	—	E1	-3.82	3320	1	5	-55 to +220
MM103G1K	10000	10	—	G	-4.03	3575	1	5	-55 to +220
MM103J1F	10000	1	—	J	-4.4	3892	1	5	-55 to +220
MM103J1K	10000	10	—	J	-4.4	3892	1	5	-55 to +220
MM153J1K	15000	10	—	J	-4.4	3892	1	5	-55 to +220
MM203J1F	20000	1	—	J	-4.4	3892	1	5	-55 to +220
MM203J1K	20000	10	±0.5°C	J	-4.4	3892	1	5	-55 to +220
MM104J1F	100000	1	—	J	-4.4	3892	1	5	-55 to +220
MM104J1K	100000	10	—	J	-4.4	3892	1	5	-55 to +220
MM104R1K	100000	10	—	R	-4.68	4140	1	5	-55 to +220
MM254R1K	250000	10	±0.5°C	R	-4.68	4140	1	5	-55 to +220

*Resistance tolerances of ± 1%, 2%, and 5% are available upon request

Packaging

Packaging Option	Packaging Code	Standard Quantity	Standard
Tape and Reel	-TR	2500	EIA-481

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NTC \(Negative Temperature Coefficient\) Thermistors](#) *category:*

Click to view products by [Littelfuse](#) *manufacturer:*

Other Similar products are found below :

[B57364S2509A002](#) [526-31AA19-104](#) [526-31AN12-202](#) [11028414-00](#) [112-104KBF-F01](#) [526-31AA79-102](#) [PTCLL05P131TBE](#) [144-101FAG-001](#) [521-53AW02-104](#) [1-1423022-3](#) [MF0916001M4BP0FPT0](#) [MF58-5.91KF3820-B1](#) [04M5002SFA4](#) [NCG18WF104F0SRB](#) [NXFT15WF104FEAB040](#) [NXFT15XV103FEAB030](#) [NXFT15XV103FEAB025](#) [NXFT15XV103FEAB040](#) [NXFT15XH103FEAB050](#) [NXFT15XH103FEAB040](#) [NCG18XH103F0SRB](#) [USUR1000-502G-06](#) [NXFT15XH103FEAB045](#) [B57864S0502F040](#) [NTCALUG01A103G611](#) [GA50K6A1IA](#) [GA10K3MR1I](#) [NXFT15XV103FEAB035](#) [NXFT15XV103FEAB021](#) [NXFT15XV103FEAB045](#) [GA50K6A1IB](#) [GA30K5A1A](#) [GA10K4A1IA](#) [A1004SS22P63](#) [11031964-00](#) [NXFT15XH103FEAB035](#) [NXFT15WF104FEAB021](#) [GA100K6A1IB](#) [11026149-00](#) [TCTR0805F10K0F4460T](#) [TCTR0805F10K0F3720T](#) [TCTR0603F100KF4460T](#) [TCTR0603F100KF4390T](#) [TCTR0603F100KF4050T](#) [TCTR0603F100KF3980T](#) [TCTR0603F10K0F4300T](#) [TCTR0603F10K0F3960T](#) [TCTR0603F10K0F3930T](#) [TCTR0805F100KF4460T](#) [TCTR0805F100KF4310T](#)