


SURFACE-MOUNT FUSES

2410 Very Fast-Acting Chip Fuses

The 2410 (6125mm) Wire-in-Air (WIA) SMD Fuse is suitable for secondary-level overcurrent protection applications.

These lead-free surface-mount devices offer increased reliability and avoid the risk of end caps falling off. Their straight wire element in air performs consistent fusing and cutting characteristics.

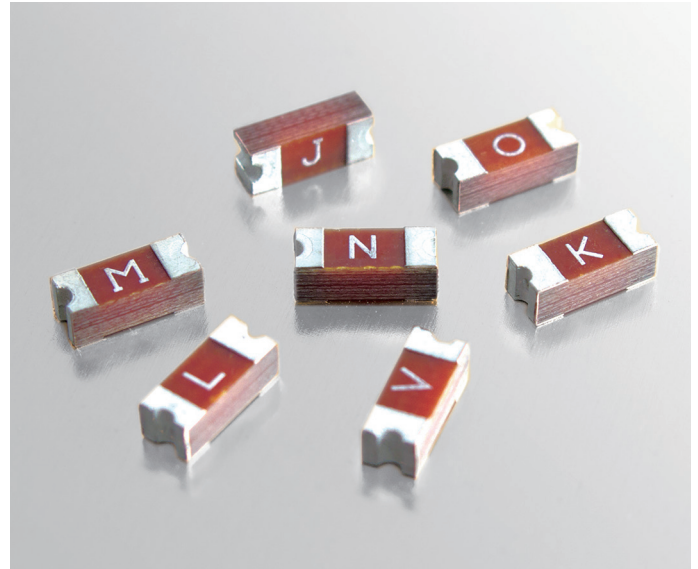

BENEFITS

- Very fast acting at 200% overload current level
- Excellent inrush current withstand capability
- High reliability and resilience
- Strong arc suppression characteristics
- Copper terminal with nickel and tin plating

FEATURES

- Halogen free, RoHS compliant and 100% lead free
- Copper or copper alloy composite fuse link
- Fiberglass enforced epoxy fuse body
- Wide range of current rating
- -55°C to +125°C operating temperature range (With de-rating)

APPLICATIONS

- Industrial equipment
- LCD/PDP TV
- Backlight inverter
- Power supplier
- Telecom system
- Networking
- Game systems
- White goods
- Automotive

Surface Mount Fuses

2410 Very Fast-Acting Chip Fuses


Table SFV1 – Clear Time Characteristics

% of Rated Current	Clear Time at 25°C	
100%	4 hrs (min)	—
200% (0.5A-10.0A)	0.01 s (min)	5 s (max)
200% (12.0A-20.0A)	0.01 s (min)	20 s (max)

Table SFV2 – Typical Electrical Characteristics, Dimensions and Recommended Pad Layout


2410 (6125 mm) Very Fast-Acting Fuse

Shape and Dimensions
mm (in)



	A		B		C		D	
	Min	Max	Min	Max	Min	Max	Min	Max
mm	5.95	6.25	1.96	2.36	0.97	1.73	2.34	2.64
in	(0.234)	(0.246)	(0.077)	(0.093)	(0.038)	(0.068)	(0.092)	(0.104)

Recommended Pad Layout
mm (Inch)



Part Number	Marking Code	Rated Current (A)	Interrupt Rating	Voltage Rating (V)		Nominal Cold DC Resistance (DCR) (Ω)*	Nominal I ² t (A ² s)
				AC	DC		
2410SFV0.50FM/125	C	0.5	UL: 0.5~2A 100A @ 250V _{AC} 2.5~8A 50A @ 125V _{AC} 0.5~8A 50A @ 125V _{DC} 300A @ 32V _{DC}	250	125	0.231	0.1
2410SFV0.63FM/125	S	0.63		250	125	0.174	0.16
2410SFV0.75FM/125	D	0.75		250	125	0.148	0.23
2410SFV1.00FM/125	E	1		250	125	0.093	0.59
2410SFV1.25FM/125	F	1.25		250	125	0.07	0.96
2410SFV1.50FM/125	G	1.5		250	125	0.062	1.19
2410SFV2.00FM/125	I	2		250	125	0.042	2.75
2410SFV2.50FM/125	J	2.5		125	125	0.031	1.21
2410SFV3.00FM/125	K	3		125	125	0.0249	1.73
2410SFV3.15FM/125	V	3.15		125	125	0.0232	2.2
2410SFV3.50FM/125	L	3.5	125	125	0.022	2.5	
2410SFV4.00FM/125	M	4	125	125	0.0172	4.1	
2410SFV5.00FM/125	N	5	125	125	0.0143	5.9	
2410SFV6.30FM/125	O	6.3	125	125	0.01	12.5	
2410SFV7.00FM/125	P	7	125	125	0.0094	14.2	
2410SFV8.00FM/125	R	8	125	125	0.0086	20.3	
2410SFV10.0FM/125	Q	10	UL: 35A @ 125V _{AC} 50A @ 125V _{DC} 300A @ 32V _{DC}	125	125	0.0066	29.2
2410SFV12.0FM/065	X	12	UL: 50A @ 65V _{AC} 50A @ 65V _{DC} 300A @ 32V _{DC}	65	65	0.0053	49.2
2410SFV15.0FM/065	Y	15	UL: 50A @ 65V _{AC} 50A @ 65V _{DC} 300A @ 32V _{DC}	65	65	0.0038	102.5
2410SFV20.0FM/065	Z	20	UL: 50A @ 65V _{AC} 100A @ 65V _{DC} 300A @ 32V _{DC}	65	65	0.0034	126.2

* Measured at ≤10% of rated current and 25°C ambient

Surface Mount Fuses

2410 Very Fast-Acting Chip Fuses

Figures SFV1-SFV2 – Family Performance Curves

Figure SFV1


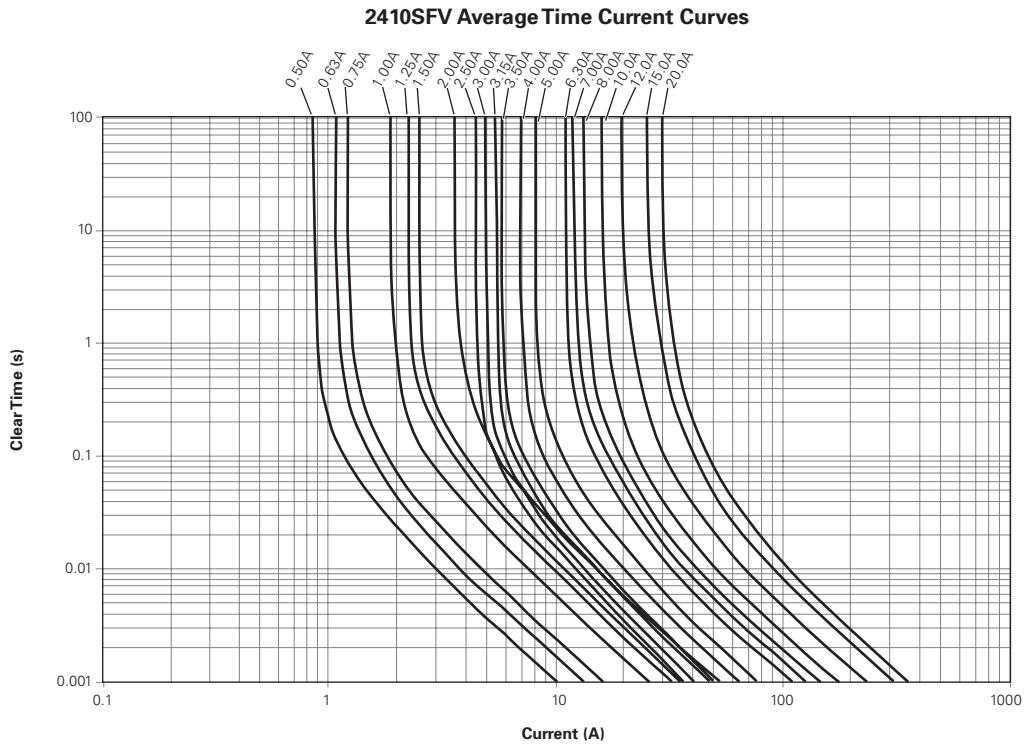


Figure SFV2

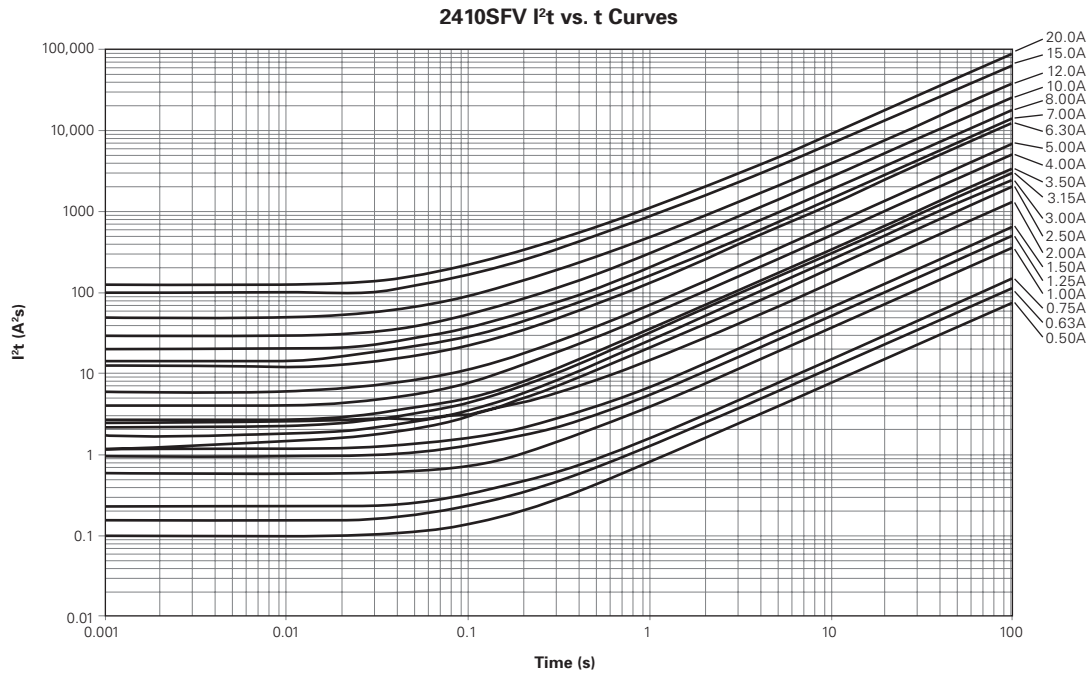

Note: Curves are nominal.

Surface Mount Fuses

2410 Very Fast-Acting Chip Fuses

Notice:

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC category](#):

Click to view products by [Littelfuse manufacturer](#):

Other Similar products are found below :

[0001.1010.G](#) [D38999/20WG39JN](#) [F02B250V1-4AS](#) [9728214S-2\(621\)](#) [RF0627-000](#) [RF2534-000](#) [ASMD185-2](#) [EN2997S61212AN](#)
[EN2997SE61203AN](#) [BK-ABC-V-5-R](#) [LR4-550RAF](#) [SMD125-2](#) [F60C500V20AS](#) [RF0078-000](#) [RF1548-000](#) [RF1973-000](#) [RF2171-000](#)
[RF2531-000](#) [RF2533-000](#) [RF2550-000](#) [TR600-150Q-B-0.5-0.130](#) [BK-AGX-20](#) [5E4795/04-1502](#) [EN2997S61212MN](#) [EN2997SE61203MN](#)
[EN2997SE61212AN](#) [EN2997SE61212MN](#) [BK1/S505-1.25-R](#) [TR-3216FF20-R](#) [TRF250-080T-B-1.0-0.125](#) [JT06RT1832BN014](#) [S-3-2-10](#)
[SMD100-2](#) [FRN-R-5-6-10](#) [FRS-R-3-2-10](#) [LP-CC-2-1-2](#) [LPS-RK-3-2-10SP](#) [BK-AGC-1-8-R](#) [BK-AGC-2-10-R](#) [BK-AGC-7-1-2](#) [BK-GDC-](#)
[500MA](#) [BK-MDL-1-6-10-R](#) [BK-SFE-4](#) [BK-ABC-1-R](#) [BK-C518-250-R](#) [BK-GDB-2A](#) [BK-MDL-1-8-R](#) [BK-MDL-6](#) [BK-AGC-5-R](#) [BK-ATC-](#)