


TERMINALS: AMP P/N 1-794610-2
CONNECTOR: AMP P/N 794617-2

24 AWG, STRANDED CONDUCTOR,
TWO CONDUCTOR,
PVC INSULATED ZIPCORD,
0.060" X 0.120" O.D. (NOMINAL)

THERMISTOR ELEMENT POTTED IN
BARREL (CLOSED-END/COMPRESSION STYLE)
OF RING LUG HOUSING

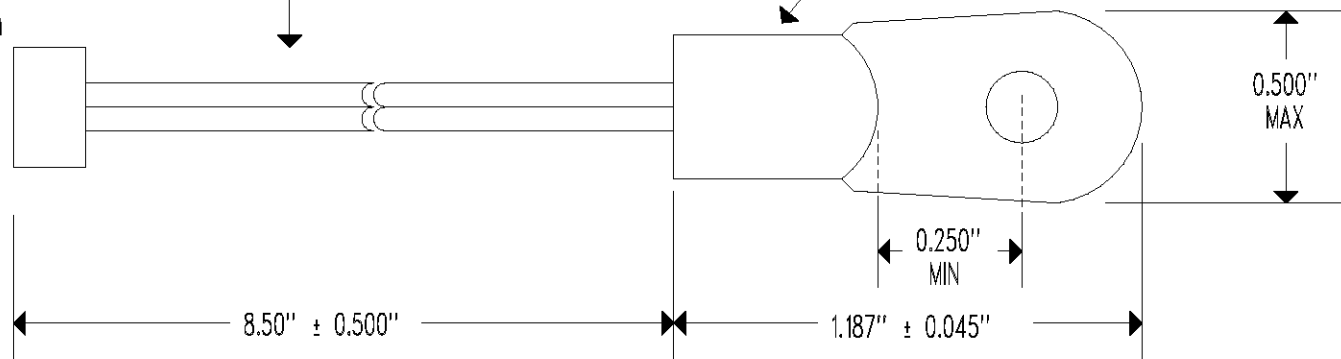

RESISTANCE @ +25°C = 10,000 Ω NOMINAL
ACCURACY (+10 TO +70°C) = ± 3.0°C
RESISTANCE/TEMPERATURE CURVE = "J"
TEMPERATURE COEFFICIENT @ +25°C = -4.4%/°C NOMINAL
BETA "β" (0 TO +50°C) = 3,892°K NOMINAL
MAXIMUM TEMPERATURE RATING = +105°C

MOUNTING-HOLE STUD-SIZE = #10

*** ROHS COMPLIANT ***

SEE MANUFACTURING SPECIFICATION (LAYER 1)

NONE	RELEASE TO PRODUCTION	11/28/11	DD
REV	REVISION RECORD	DATE	APP

SCALE NONE	U.S. SENSOR CORP. © COPYRIGHT 714-639-1000 www.ussensor.com
DRAWN BY DAN DANKERT	
DATE 11/28/11	THERMISTOR PROBE
REV. NONE	P/N USP12712
LAYER 0 OF 2	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [923848-C](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK106-3](#) [PK2-5MM-102](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [CT4386](#) [PP023-1](#) [PK1-5MM-127](#) [PP026-1](#) [PK103](#) [PK-ZS-013](#) [P6139B-PK10](#) [PQ215](#) [PQ219](#) [PQ218](#) [RT-ZI10C](#) [TT-SI 8071](#) [TT-SI 8050](#) [TT-SI 8010A](#) [TT-SI 7005](#)
[GE.3421](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4012](#) [4013](#) [4014](#) [4015](#)