

Leaded ThermistorsGlass Encapsulated Thermistor

USUG1000 Series UL Recognized DO-35 Glass Encapsulated Thermistors

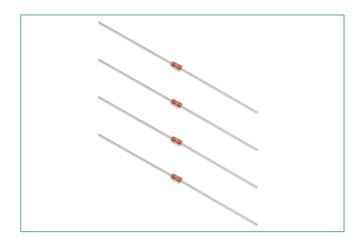

Agency A	pprovals
AGENCY	AGENCY FILE NUMBER
71	E232830

Dimensions

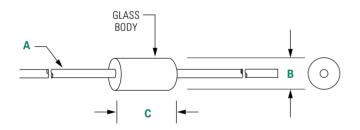

Dimensions shown in inches.

A	В	С
0.020"±0.002" 24 AWG Tinned CCS 1.0" Long Min	0.075" Max	0.160" Max


Description

Littelfuse low cost interchangeable glass encapsulated thermistors are manufactured using super stable, precision NTC chips which are hermetically sealed in a glass (DO-35 diode style) package. The result is a device which exhibits excellent long term reliability and stability even when subjected to severe environmental or thermal conditions. They are well suited for uses where their interchangeability eliminates the necessity for costly individual circuit calibration. Their uniform dimensions and axial lead configuration make them especially suitable for use with automatic insertion equipment.

Features

- Temperature rating = -40 to +150°C
- Hermetically sealed glass package
- Excellent long-term stability
- Tinned CSS Lead Wires are Solderable or Weldable

Part Numbering System

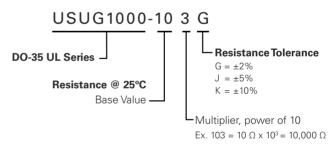

Note: Not all combinations of Part Number codes are available. Contact Littelfuse for details.

Packaging

Packaging Option	Packaging Option Packaging Code		Standard		
Tape and Reel	-TR	5000	EIA-296		



USUG1000 Series UL Recognized DO-35 Glass Encapsulated Thermistors

Specifications

Part Number	Resistance Ohms @25°C	*Resistance Tol. ± % @ 25°C	R-T Curve	Temperature Coefficient (%/°C) @ 25°C	Beta (K) 0-50°C	Max. Power Rating (mW)	Dissipation Constant, Nominal (mW/°C)	Temperature Rating (°C)
USUG1000-103G	10000	2	J	_	3892	20	2	-40 to +150
USUG1000-103J	10000	5	J	-	3892	20	2	-40 to +150
USUG1000-103K	10000	10	J	_	3892	20	2	-40 to +150
USUG1000-203G	20000	2	J	-	3892	20	2	-40 to +150
USUG1000-203J	20000	5	J	_	3892	20	2	-40 to +150
USUG1000-203K	20000	10	J	-	3892	20	2	-40 to +150
USUG1000-253G	25000	2	J	_	3892	20	2	-40 to +150
USUG1000-253J	25000	5	J	-	3892	20	2	-40 to +150
USUG1000-253K	25000	10	J	_	3892	20	2	-40 to +150
USUG1000-303G	30000	2	J	_	3892	20	2	-40 to +150
USUG1000-303J	30000	5	J	_	3892	20	2	-40 to +150
USUG1000-303K	30000	10	J	-	3892	20	2	-40 to +150
USUG1000-503G	50000	2	J	_	3892	20	2	-40 to +150
USUG1000-503J	50000	5	J	_	3892	20	2	-40 to +150
USUG1000-503K	50000	10	J	-3.67	3892	20	2	-40 to +150
USUG1000-104G	100000	2	J	-	3892	20	2	-40 to +150
USUG1000-104J	100000	5	J	-	3892	20	2	-40 to +150
USUG1000-104K	100000	10	J	-	3892	20	2	-40 to +150
USUG1000-254G	250000	2	J	-	3892	20	2	-40 to +150
USUG1000-254J	250000	5	J	-	3892	20	2	-40 to +150
USUG1000-254K	250000	10	J	_	3892	20	2	-40 to +150

^{*}Resistance tolerances of ± 1%, 2%, and 5% are available upon request

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littlefuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littlefuse.com/disclaimer-electronics

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NTC (Negative Temperature Coefficient) Thermistors category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below:

118-253FAJ-P01 121-202EAC-P01 123-802EAJ-P01 128-105NDP-Q02 129-202VME-S01 135-503LAD-J01 B57250V2473F560

B57620C472K962 B57620C5103J062 B57621C5102J062 A1004SG22P0 192-103LPR-A01 199-303KAF-A02 30054-4 B57471V2474H062

B57620C5102J062 B57620C5223J062 500-52AA04-101 526-31AA19-104 526-31AN12-202 103AT-5-1P-FT 10K3A542I 111-802EAJ-901

112-103FAG-H02 112-104KAG-B01 11028414-00 111-182CAG-H01 112-103FAF-H01 112-104KBF-F01 118-202CAJ-P01 526-31AA79
102 B57442V5103J62 517-59CL01-202 B57401V2103H62 B57621C5472J62 11032565-00 194303KEVA01 NTCACAPE3C90193

B57359V2224J260 B57343V5103J360 NXRT15WB473FA1B040 50070974-003-01 189-602LDR-A01 B57621C5472K062 135-105QAF-J02 B57421V2153J062 B57230V2103H260 B57471V2684H062 B57471V2333H062 126-153YJC-B01