


**REINFORCED**



## FEATURES

- ✓ Reinforced, strength up to 1000 kgs.
- ✓ Reversible (left and right hand).
- ✓ Symmetrical.
- ✓ Height 85 mm., width 21,5 mm.
- ✓ Fail – secure (NC) and fail-safe (NO) models.
- ✓ Assembling screws distance 52 mm.
- ✓ Power supply: 6, 12, 24, 48 V AC / DC.
- ✓ 24 hours working models.
- ✓ Low or very low power consumption.
- ✓ Working temperature for NO electric strikes is 60°C.

## TECHNICAL DATA

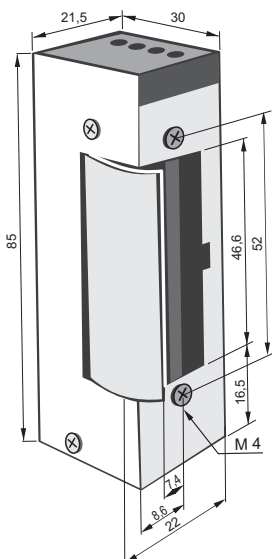

| Model    |              |      |
|----------|--------------|------|
| Standard | Low consump. | NO   |
| 1510     | 1518         | 1511 |

| Power supply (V)          | 6-12V AC/DC<br>Standard | 12-24V AC/DC<br>Standard | 12-24V AC/DC<br>Low consump. 12V                    | 24-48V AC/DC<br>Low consump. 24V                    | 12V DC<br>NO   | 24V DC<br>NO   |
|---------------------------|-------------------------|--------------------------|---|---|----------------|----------------|
| Tolerance (%)             | ± 5 %                   |                          |   |   |                |                |
| Continuous work           | < 1 min.                | < 1 min.                 | 100 % 12V DC<br><1 min. 12V AC<br><1 min. 24V AC/DC | 100 % 24V DC<br><1 min. 24V AC<br><1 min. 48V AC/DC | 100 %          | 100 %          |
| Resistance (Ω)            | 8,5                     | 20                       | 40  | 150   | 60             | 150            |
| Power consumption DC (mA) | 6V / 700<br>12V / 1400  | 12V / 600<br>24V / 1100  | 12V / 300<br>24V / 600                              | 24V / 170<br>48V / 340                              | 12V / 300<br>- | 24V / 170<br>- |
| Power consumption AC (mA) | 6V / 600<br>12V / 1200  | 12V / 500<br>24V / 1000  | 12V / 250<br>24V / 510                              | 24V / 150<br>48V / 300                              | -              | -              |
| Max preload DC (N)        | 10                      | 10                       | 10  | 10  | 10             | 10             |
| Max preload AC (N)        | 90                      | 90                       | 90  | 90  | -              | -              |

Recommended front plates: 900; 901; 902; 904; 903; 913

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Fixings & Accessories](#) category:*

*Click to view products by [Lockpol](#) manufacturer:*

Other Similar products are found below :

[F03-01 SUS304 BINIL](#) [8000-5130](#) [FH-AP1](#) [PH-1-10M](#) [PH-1-20M](#) [PH-2-30M](#) [AC201](#) [R4](#) [ADI-LC3S](#) [E39-L149](#) [EC18-WELL](#) [PC-15015](#)  
[K35-4](#) [A-1923](#) [SS-12143](#) [STA12](#) [PH-1-50M](#) [R6](#) [D01051301](#) [43912557-020](#) [MF-1 D=3.2](#) [BGN-035](#) [E39-L7](#) [ZX-SB11](#) [D01070602](#) [606072](#)  
[606075](#) [Y92ES12PVC4A10ML](#) [Y92ES12PVC4S5ML](#) [SA9Z-F11](#) [Z49-SF1](#) [ZFV-XMF2](#) [E4R-R12A-CS3M010](#) [ZX-SW11E V3](#) [CCS-PL-](#)  
[LDR2-70](#) [E4R-R12A-CS3M020](#) [BS-1T CHITAN](#) [F03-01 CHITAN](#) [PH-2-90M](#) [PH-2-5M](#) [XMLZL008](#) [AC244](#) [28810-1](#) [PH-1-40M](#) [SS-](#)  
[12225](#) [32043-500](#) [PH-2-60M](#) [ZG2-XC15CR](#) [ZS-SW11V3E](#) [ZS-MDC11](#)