
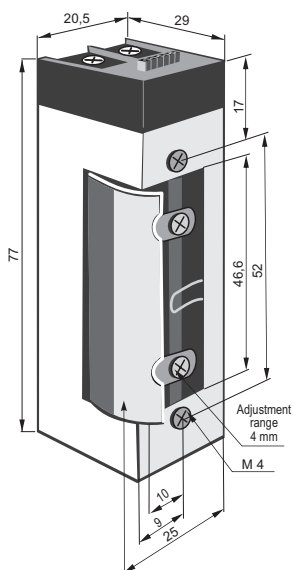


**DUAL VOLTAGE**



## FEATURES

- ✓ Reversible (left and right hand).
- ✓ Height 77,5 mm., width 20,5 mm.
- ✓ For narrow profiles.
- ✓ Fail-safe (NO) models.
- ✓ Assembling screws distance 52 mm.
- ✓ Latch adjustment 4 mm.
- ✓ The power supply is set by jumper settings: 12 or 24 V DC.
- ✓ Low or very low power consumption.
- ✓ Durability: grade C-200 000 cycles.
- ✓ Category of use - grade 3 - suitable for public buildings.
- ✓ Certificate of Conformity acc. to EN 14846.

## TECHNICAL DATA

Model	Standard	Rel.lever	Hold-Open	NO
1711 BI	<input checked="" type="checkbox"/>	-	-	<input checked="" type="checkbox"/>

Power supply (V)	12-24V DC
Tolerance (%)	± 5 %
Continuous work	100% 12V DC 100% 24V DC
Resistance (Ω)	45/180
Power consumption (mA)	12V / 260 24V / 130
Max preload DC (N)	10
Working temperature	12V DC = 58 °C 24V DC = 62 °C

Recommended front plates: 900; 901; 902; 903; 913

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Fixings & Accessories](#) category:*

*Click to view products by [Lockpol](#) manufacturer:*

Other Similar products are found below :

[F03-01](#) [SUS304 BINIL](#) [8000-5130](#) [FH-AP1](#) [PH-1-10M](#) [PH-1-20M](#) [PH-2-30M](#) [AC201](#) [R4](#) [ADI-LC3S](#) [E39-L149](#) [EC18-WELL](#) [K35-4](#) [A-1923](#) [SS-12143](#) [STA12](#) [PH-1-50M](#) [R6](#) [D01051301](#) [43912557-020](#) [MF-1 D=3.2](#) [BGN-035](#) [E39-L7](#) [ZX-SB11](#) [D01070602](#) [606072](#) [606075](#) [Y92ES12PVC4A10ML](#) [Y92ES12PVC4S5ML](#) [SA9Z-F11](#) [Z49-SF1](#) [E4R-R12A-CS3M010](#) [ZX-SW11E V3](#) [E4R-R12A-CS3M020](#) [BS-1T](#) [CHITAN](#) [CCS-PD2-1012](#) [PH-2-90M](#) [PH-2-5M](#) [XMLZL008](#) [AC244](#) [28810-1](#) [PH-1-40M](#) [SS-12225](#) [32043-500](#) [ZG2-XC15CR](#) [ZS-SW11V3E](#) [ZS-MDC11](#) [ZS-DSU11](#) [ZJ-SFW11](#) [Y92E-ST505-05](#) [PH-2 HYPALON 10M](#)