

ANTI FIRE



FEATURES


- ✓ For fireproof and smokeproof doors with fire resistance 60 min. (Ei260), strength up to 750 kg.
- ✓ Reversible (left and right hand).
- ✓ Symmetrical.
- ✓ Height 84 mm., width 22,5 mm.
- ✓ Fail - secure (NC) and fail-safe (NO) models.
- ✓ Assembling screws distance 52 mm.
- ✓ Power supply: 12-24 V AC / DC.
- ✓ 24 hours working models.
- ✓ Low or very low power consumption.
- ✓ Working temperature for NO electric strikes is 60°C.
- ✓ Durability: grade C - 200,000 cycles.
- ✓ Category of use - grade 3 - suitable for public buildings.
- ✓ Certificate of Conformity acc. to EN 14846.

TECHNICAL DATA

Model	AC		DC		Coil Ohm	NO/NC	Hold-Open	Rel.lever.
	V±5%	mA	V±5%	mA				
1811F 12V DC	-	-	12	220	53	NO	No	No
1811F 24V DC	-	-	22-25	160	160	NO	No	No
1810F 12-24V AC/DC *	12-24	200/450	12-24	200/500	40	NC	No	No

* / 12V DC.

Max preload for 12V DC = 3N, for 24V DC = 23N, for 12-24V AC=180N and for 12-24V DC=23N.

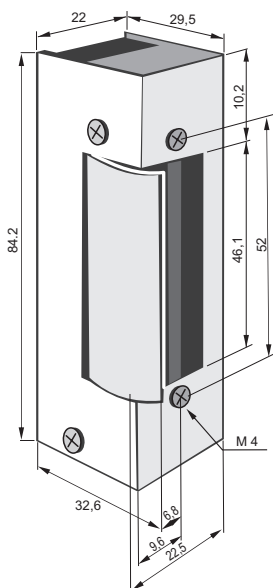

Front plates: CE 194EP/6PZ, CE 194EL/6PZ for NC electric strikes,
 CE 194RE/6PZ for reversible electric strikes.
 The 196R latch is suitable for NO electric strikes.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Fixings & Accessories](#) category:

Click to view products by [Lockpol](#) manufacturer:

Other Similar products are found below :

[F03-01](#) [SUS304 BINIL](#) [8000-5130](#) [FH-AP1](#) [PH-1-10M](#) [PH-1-20M](#) [PH-2-30M](#) [AC201](#) [R4](#) [ADI-LC3S](#) [E39-L149](#) [EC18-WELL](#) [K35-4](#) [A-1923](#) [SS-12143](#) [STA12](#) [PH-1-50M](#) [R6](#) [D01051301](#) [43912557-020](#) [MF-1 D=3.2](#) [BGN-035](#) [E39-L7](#) [ZX-SB11](#) [D01070602](#) [606072](#) [606075](#) [Y92ES12PVC4A10ML](#) [Y92ES12PVC4S5ML](#) [SA9Z-F11](#) [Z49-SF1](#) [E4R-R12A-CS3M010](#) [ZX-SW11E V3](#) [E4R-R12A-CS3M020](#) [BS-1T](#) [CHITAN](#) [CCS-PD2-1012](#) [PH-2-90M](#) [PH-2-5M](#) [XMLZL008](#) [AC244](#) [28810-1](#) [PH-1-40M](#) [SS-12225](#) [32043-500](#) [ZG2-XC15CR](#) [ZS-SW11V3E](#) [ZS-MDC11](#) [ZS-DSU11](#) [ZJ-SFW11](#) [Y92E-ST505-05](#) [PH-2 HYPALON 10M](#)