




## FEATURES

- ✓ Reversible electromagnetic door bolt NC (opened while energizing), cylinder enables the bolt to be opened with the key during the lack of power.
- ✓ It is possible to instal the bolt vertically or horizontally (bolt down).
- ✓ Signaling of closing and opening the door.
- ✓ Interlock against activation when the door is in the wrong position.
- ✓ Over voltage protection.
- ✓ Reverse polarity protection.
- ✓ Automatic closing.

## TECHNICAL DATA

Power supply	12/24 V DC
Power consumption - START	850 mA dla 12V DC 600 mA dla 24V DC
Power consumption - WORK	200 mA dla 12V DC 100 mA dla 24V DC
Adjustable closing delay	0, 3, 6, 9 sek.

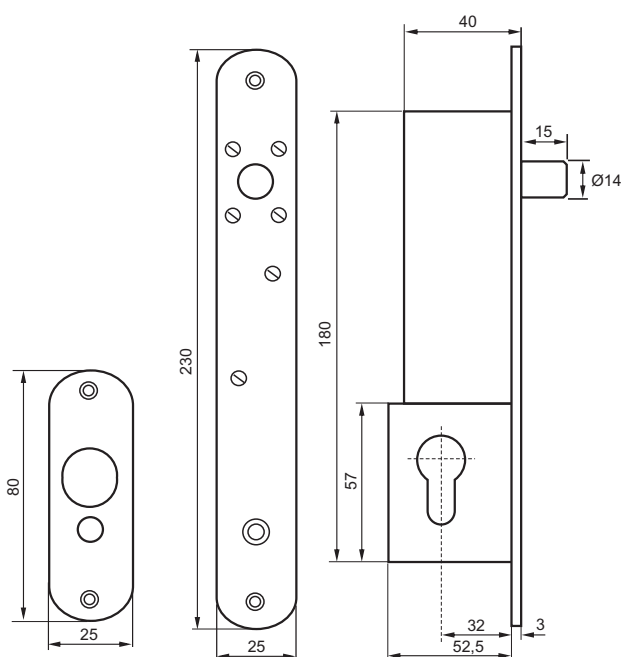

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Fixings & Accessories](#) category:*

*Click to view products by [Lockpol](#) manufacturer:*

Other Similar products are found below :

[8000-5130](#) [R4](#) [PBT420-100R](#) [ACPG-003](#) [SS-12143](#) [STA12](#) [AP4-T](#) [R6](#) [D01051301](#) [43912557-020](#) [D01070602](#) [606072](#) [606075](#) [28810-2](#)  
[ZX-SW11E V3](#) [T63353](#) [32043-625](#) [SS-12225](#) [PH-2-60M](#) [STE-1042609RFRC](#) [STE-1186763RFM4](#) [76002066](#) [C115 E02](#) [041 G1](#) [C115 E05](#)  
[041 G1](#) [SA9Z-S07PN02](#) [ECT18-WELL](#) [79450811](#) [P2435.3](#) [AS7030B\\_WRISTBAND](#) [AS7038GB\\_WRISTBAND](#) [51001R](#) [11027667-00](#)  
[ROTATEKNOB3D2GOKITTOBO1](#) [1410RFT 6-12V AC/DC](#) [1410RF 6-12V AC/DC](#) [1411RFT-24V DC](#) [1420RFW 12-24V AC/DC](#)  
[1420RFW 6-12V AC/DC](#) [1421-12V DC](#) [1428 24-48V AC/DC](#) [1428RF 12-24V AC/DC](#) [1428RF 24-48V AC/DC](#) [1428RFT 12-24V AC/DC](#)  
[1448RF 12-24V AC/DC](#) [1448RF 24-48V AC/DC](#) [1448RFT 12-24V AC/DC](#) [1448RFW 12-24V AC/DC](#) [1510 12-24V AC/DC](#) [1743 6-12V](#)  
[AC/DC](#) [1743BB 12-24V DC](#)