

# LogiLink®



## 4K 4x1 HDMI™ Switch 4K/60 Hz

Art. No.: HD0056

Designed for applications that require the routing of 4 sources to 1 compatible display device. It enables the reliable transmission at video resolutions up to 4K@60 Hz. Features auto and manual switching modes for selection; instantly switching for a smooth video transition between HDMI ports.

### Features:


- » Allows up to four HDMI sources to be connected to one HDMI display
- » Supports manual switching, remote switching or automatic switching (Smart function)
- » Resolution up to UHD 4K@60 Hz (YUV 4:4:4) and Full 3D
- » Bandwidth: 6 Gbps/600 MHz per Channel (18 Gbps total)
- » Supports HDCP 2.2, DDC, HDR and CEC functions
- » Supports 12bit per channel (36bit all channels) deep color
- » Supports uncompressed audio such as LPCM
- » Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)



(a) Power LED indicator  
(b) HDMI input 1-4 ports LED indicator  
(c) Auto mode LED indicator  
(d) IR mode LED indicator  
(e) IR signal receiver  
(f) Selection Switch




(g) DC 5V input through Micro USB cable  
(h) HDMI output port  
(i) HDMI input 1-4 ports

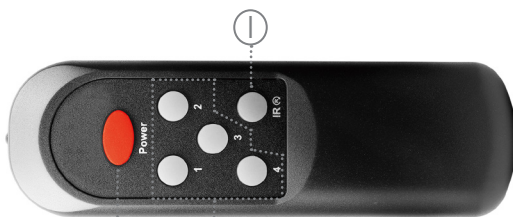

(j) Remote power on/off button  
(k) Select HDMI input 1-4  
(l) IR mode on/off button

- (a) Power LED indicator
- (b) HDMI input 1-4 ports LED indicator
- (c) Auto mode LED indicator
- (d) IR mode LED indicator
- (e) IR signal receiver
- (f) Selection Switch
- (g) DC 5V input through Micro USB cable
- (h) HDMI output port
- (i) HDMI input 1-4 ports
- (j) Remote power on/off button
- (k) Select HDMI input 1-4
- (l) IR mode on/off button

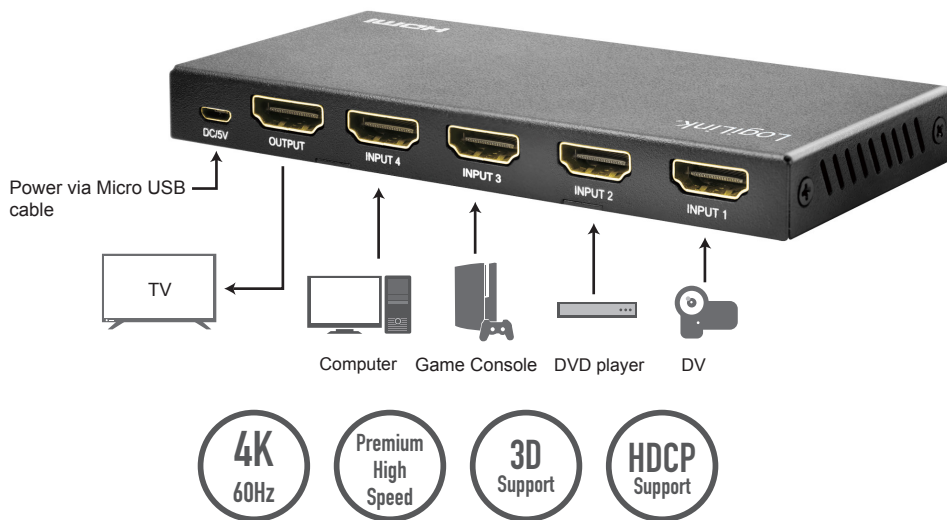

## Specifications:

Input Ports	4x HDMI-A female, 1x Micro USB female
Output Port	1x HDMI-A female
HDMI Version	2.0
HDCP Version	2.2
HDMI CEC	Yes
HDMI HDR	Yes
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz
Video Bandwith	6 Gbps/600 MHz
3D Supporting	Yes
Input and output DDC signal	Yes
Chassis Material	Metal
LED Indication	Yes
IR Remote Support	Yes (require 2x 1,5 V AAA batteries, not included in the package)
Power By	Through Micro USB cable, 5 V/1 A (5 W max.)
Uncompressed Audio	LPCM 7.1
Compressed Audio	DTS, Dolby Digital, DTS-HD Master Audio™, Dolby TrueHD
Operating Temperature	0–70°C
Operating Humidity	10–85% RH (no condensation)
Storage Temperature	-10–80°C
Storage Humidity	5–90% RH (no condensation)
Dimensions	13,6 x 6,1 x 1,45 cm
Weight	0,173 kg
Color	Black

## Package Contents:

- » 1x HDMI Switch
- » 1x Remote Control
- » 1x USB Charging Cable
- » 1x User Manual

## Package Information:

- » Packing Dimension: 193x145x60 mm
- » Packing Weight: 0,34 kg
- » Carton Dimension: 505x235x340 mm
- » Carton Q'ty: 15 pcs
- » Carton Weight: 5,6 kg



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.



HD0056



4 052792 066951

Made in China

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:*

*Click to view products by [Logilink](#) manufacturer:*

Other Similar products are found below :

[30-528](#) [30-504](#) [33DVIR-24S1B](#) [47648-2000](#) [TC142X](#) [HAGBH](#) [AABII](#) [AAIBG](#) [AAIBH](#) [AANBG](#) [52355](#) [XHLJQ-00026](#) [HDMI-019R](#)  
[G46M2013201AWEU](#) [ST-0277D00-052-142](#) [PJ-399M](#) [PJ-615-5A](#) [HDMI-S-125-D](#) [PJ-359](#) [PJ-3850-5A](#) [PJ-3250D-5A](#) [KH-PJ-359](#) [58490](#)  
[DS-45404](#) [60907](#) [60616](#) [AAMBJ](#) [61275](#) [61161](#) [61297](#) [KABHD](#) [OEM-40](#) [61293](#) [61304](#) [DS-45316](#) [50355](#) [AK-330115-010-S](#) [AK-330101-](#)  
[002-S](#) [AHCBI](#) [AK-330127-300-S](#) [AAGBH](#) [CG526-B-3.0](#) [64866](#) [CG525-R-1.8](#) [61296](#) [CG865-3](#) [CG517-3.0](#) [EAEBD](#) [65262](#) [CG862-1.5](#)  
[AK-340103-050-S](#)