



RJ45 Keystone Jack PrimeLine Cat.8.1 STP 180° Shielded, GHMT verified

Part no.: KJ58C08

Technical Features

Cat.8.1 Class | ISO/IEC TR11801-9901-2014

Comply with ANSI/TIA 568-C.2-1 standard

IEEE 802.3af PoE and IEEE 802.3at PoE+ applications

For solid and stranded wire 22AWG to 24AWG


Suitable for cable jackets 5.5 to 9.0mm OD

Full shielded with zinc alloy housing

GHMT verified (2 connector channel)

Fits for 1U24port and 1U48port keystone panel

Technical Drawings

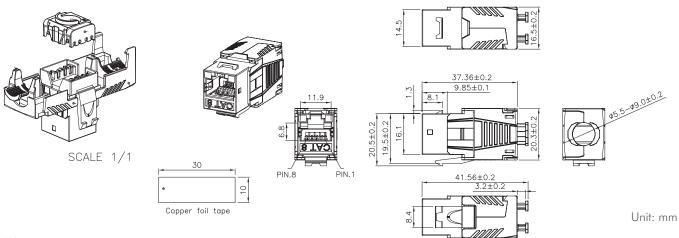









Package Contents

Cat. 8.1 Fully Shielded Keystone Jack x 1

Packaging InformationsPacking Dimension $10 \times 12 \times 0.04 \text{mm}$ Packing Weight0.0346 kgCarton Dimension $480 \times 390 \times 253 \text{mm}$ Carton Q'ty500 pcsCarton Weight17.3 kg











X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Modular Connectors / Ethernet Connectors category:

Click to view products by Logilink manufacturer:

Other Similar products are found below:

RJE231881317T MP1010RX-1000 MP44RX-1000 GAX-3-66 GAX-8-62 93606-0253 GD-A-44 GDCX-PA-66-50 GDCX-PN-64 GDCX-PN-66 GDCX-PN-66-50 GDLX-A-66 GDLX-A-88 GDLX-N-66 GDLX-S-88K GDTX-S-88-50 GDX-PA-1010 GLX-N-1010M-BLK GLX-N-44M GLX-S-88M-BLK GMX-N-1010 GMX-S-1010 GMX-S-66 GMX-SMT2-N-1010 GMX-SMT2-N-64-50 GMX-SMT2-S6-88 GMX-SMT4-N-88 GPX-2-64 GRT1-BT1-5 GSGX-N-2-88 GSX-NS2-88-3.05 GSX-NS2-88-3.05-50 GSX-NS-88-3.05-30 GSX-NS-88-3.05-30 GSX-NS-88-3.05-50 GSX-NS-88-3.05-30 GSX-NS-88-3.05-50 GSX-NS-88-3.68 1-1775629-2 GWLX-S-88-GR GWLX-S9-88-YG 1300500326 1300500227 1300530003 1300570002 1324640-4 RJ11FTVC2R RJ11FTVC2N RJFTVX2SA1G 132764-001 1400000 1413176 1413235