

LogiLink®



USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213

Best Connectivity



Portable designed for charging an USB-C™ laptop and a smartphone simultaneously. The perfect charging accessory for traveling.



RoHS
compliant




*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213

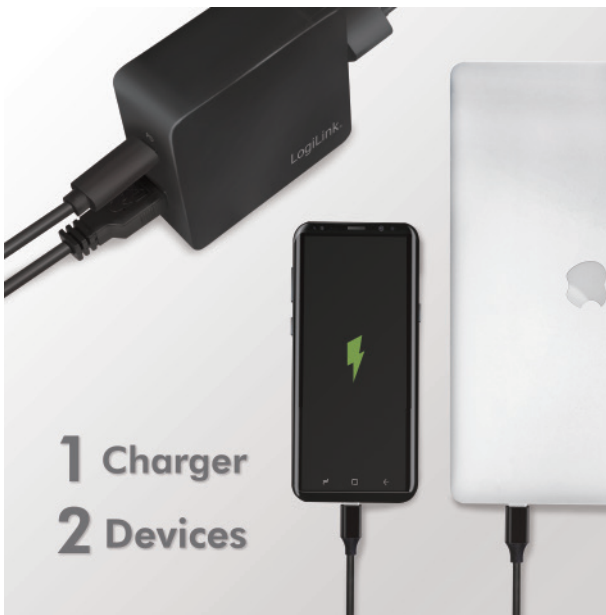

1 Charger for 2 Devices

Charge your power-hungry devices with one 45W or 65W USB-C port and one 2.1A fast charging USB-A port.



PA0212
USB-C 45W PD Port



PA0213
USB-C 65W PD Port



Multiple Protection

Supports overcurrent, overvoltage, overheating and short circuit protections.



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Best Connectivity

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213



Simultaneous Charging

Charge 2 devices at the optimal speeds at the same time.



Wide Compatibility

Compatible with most mobile devices: smartphones, tablets, laptops and much more.

Best Connectivity



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port



Art. No.: PA0212
PA0213

Specification:



45W
PA0212



65W
PA0213

Input	100 - 240V AC 50/60Hz 1A max.	100 - 240V AC 50/60Hz 1A max.
Output	USB-A port: 5V/2.1A (10.5W) max.	USB-A port: 5V/2.1A (10.5W) max.
Output	USB-C port: 5V/3A (15W), 9V/3A (27W), 12V/3A(36W), 15V/3A (45W), 20V/2.25A (45W) max.	USB-C port: 5V/3A (15W), 9V/3A (27W), 12V/3A(36W), 15V/3A (45W), 20V/3.25A (65W) max.
Protections	Overcurrent, overvoltage, overheating and short circuit	Overcurrent, overvoltage, overheating and short circuit
Efficiency	Level V	Level V
Operating Temperature Range	0~40°C	0~40°C
Storage Temperature Range	-40°C ~ 85°C	-40°C ~ 85°C
Relative Humidity	25% ~ 90% (non-condensing)	25% ~ 90% (non-condensing)
Dimension	100 x 61 x 29mm	107 x 70 x 29mm
Weight	116g	175g
EAN Code	4052792055115	4052792055122



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213



Compatible Products from LogiLink:



Package Contents:

- » 1 x USB Wall Charger
- » 1 x User Manual



Package Information:

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
PA0212	176 x 127.5 x 42mm	0.178kg	445 x 390 x 275mm	40pcs	7.8kg
PA0213	176 x 127.5 x 42mm	0.23kg	445 x 390 x 275mm	40pcs	9.9kg



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Best Connectivity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Logilink manufacturer](#):

Other Similar products are found below :

[AA0031](#) [AA0035](#) [AA0039B](#) [AA0039W](#) [AA0050](#) [AA0063](#) [AA0065](#) [AA0069](#) [AA0089](#) [AA0103](#) [AA0104](#) [AA0105](#) [AA0107](#) [AA0112](#)
[AA0113](#) [AA0115](#) [AA0119](#) [AA0120](#) [AA0121](#) [AA0122](#) [AA0153](#) [AD0001](#) [AD0002](#) [AD0008](#) [AD0009](#) [AD0010](#) [AD0011](#) [AD0013](#) [AD0014](#)
[AD0015](#) [AD0017](#) [AD0019](#) [AD0020](#) [AD0021](#) [AD0022](#) [AH0001](#) [AH0002](#) [AH0005](#) [AH0006](#) [AH0007](#) [AH0008](#) [AH0009](#) [AH0010](#) [AH0011](#)
[AH0012](#) [AH0014](#) [AH0015](#) [AU0002E](#) [AU0003C](#) [AU0004A](#)