

LogiLink®



USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213

Best Connectivity



Portable designed for charging an USB-C™ laptop and a smartphone simultaneously. The perfect charging accessory for traveling.



RoHS
compliant




*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213

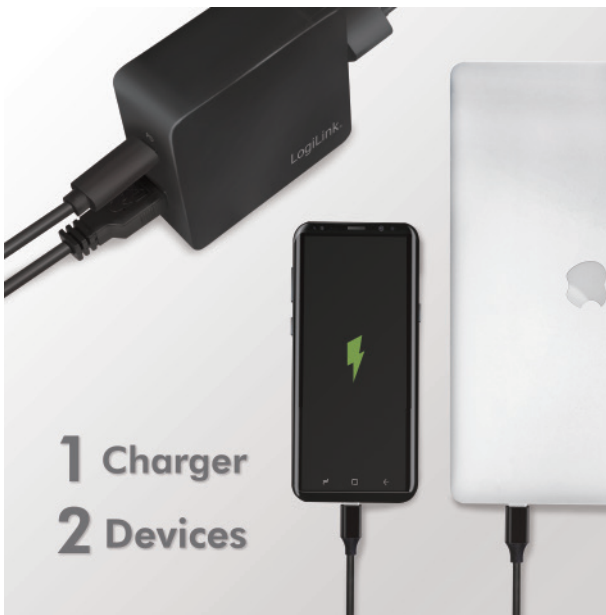

1 Charger for 2 Devices

Charge your power-hungry devices with one 45W or 65W USB-C port and one 2.1A fast charging USB-A port.



PA0212
USB-C 45W PD Port



PA0213
USB-C 65W PD Port



Multiple Protection

Supports overcurrent, overvoltage, overheating and short circuit protections.



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Best Connectivity

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213



Simultaneous Charging

Charge 2 devices at the optimal speeds at the same time.



Wide Compatibility

Compatible with most mobile devices: smartphones, tablets, laptops and much more.

Best Connectivity



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port



Art. No.: PA0212
PA0213

Specification:



45W
PA0212



65W
PA0213

Input	100 - 240V AC 50/60Hz 1A max.	100 - 240V AC 50/60Hz 1A max.
Output	USB-A port: 5V/2.1A (10.5W) max.	USB-A port: 5V/2.1A (10.5W) max.
	USB-C port: 5V/3A (15W), 9V/3A (27W), 12V/3A(36W), 15V/3A (45W), 20V/2.25A (45W) max.	USB-C port: 5V/3A (15W), 9V/3A (27W), 12V/3A(36W), 15V/3A (45W), 20V/3.25A (65W) max.
Protections	Overcurrent, overvoltage, overheating and short circuit	Overcurrent, overvoltage, overheating and short circuit
Efficiency	Level V	Level V
Operating Temperature Range	0~40°C	0~40°C
Storage Temperature Range	-40°C ~ 85°C	-40°C ~ 85°C
Relative Humidity	25% ~ 90% (non-condensing)	25% ~ 90% (non-condensing)
Dimension	100 x 61 x 29mm	107 x 70 x 29mm
Weight	116g	175g
EAN Code	4052792055115	4052792055122



RoHS
compliant



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

LogiLink®

USB-C™ 2-Port Wall Charger

1 x USB-C™ Port & 1 x USB Port

Art. No.: PA0212
PA0213

Compatible Products from LogiLink:



Package Contents:

- » 1 x USB Wall Charger
- » 1 x User Manual

Package Information:

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
PA0212	176 x 127.5 x 42mm	0.178kg	445 x 390 x 275mm	40pcs	7.8kg
PA0213	176 x 127.5 x 42mm	0.23kg	445 x 390 x 275mm	40pcs	9.9kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Best Connectivity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Logilink](#) manufacturer:

Other Similar products are found below :

[CV0036A](#) [FA01SC4](#) [FA02LC3](#) [FA04LC3](#) [AD0011](#) [BP0002](#) [NK0021](#) [NK0023](#) [NP0021](#) [NP0048](#) [NP0057](#) [LPS219](#) [CHB3105](#) [CP0141](#)
[CQ2091U](#) [CQ2096U](#) [CQ2099S](#) [CV0058](#) [UA0131](#) [UA0216](#) [NK0024](#) [NP0017A](#) [NP0053](#) [CHB1115](#) [CQ2102U](#) [CA1022](#) [CHA0010](#)
[CHA0030](#) [CHB003](#) [CQ4049S](#) [CQ4102S](#) [CQ5067S](#) [CU0072](#) [CV0021](#) [CV0041](#) [CV0054A](#) [CV0093](#) [CV0094](#) [ID0135](#) [ID0137](#) [FB0001B](#)
[FB2401B](#) [FB2402B](#) [FB3001](#) [FL0LC02](#) [FL2LC02](#) [FL2SC02](#) [FL3LC02](#) [FL4LC02](#) [FL4SC02](#)