

# LogiLink®



## USB-C™ 3.2 Gen 2 to HDMI™ Adapter, 0.14 m

Art. No.: UA0380

This USB 3.2 Gen 2 to HDMI adapter allows you to connect your USB-C equipped laptop, tablet or computer to a HDMI display, by using your normal HDMI connection cable; supports video resolution up to Ultra HD 4K.

- » Compliant to USB 3.2 Gen 2 Specification and backward compatible with earlier USB versions
- » Supports reversible USB-C connector
- » Compatible with Thunderbolt 3
- » Works for source devices with USB-C or Thunderbolt 3 port interfaces that support the alternative DisplayPort mode ( DP Alt mode )
- » Compliant to Premium High Speed HDMI specification and backward compatible with earlier HDMI versions
- » Supports high quality video up to 4K@60 Hz
- » Supports the static HDR of 4K@60 Hz HDMI and 12-bit color processing technology
- » Supports bandwidth up to 18 Gbps
- » Support audio formats such as PCM 2.0-7.1, DTS-HD Master Audio, Dolby TrueHD, 3D Audio
- » Supports extended color spaces such as x.v. Color + Deep Color up to 48 bit color depth
- » Supports EDID (Extended Display Identification Data), ARC (Audio Return Channel), CEC (Consumer Electronics Control), DDC (Display Data Channel) and TMDS (Transition Minimized Differential Signaling)
- » Supports HDCP functions as well as the connected devices supporting
- » Slim and Elegant design with aluminum alloy body and unibody structure
- » No software or driver installation needed
- » Connect your USB-C equipped desktop/laptop directly to an HDTV, display and monitor with HDMI to stream HD audio and video from your computer to your monitor



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.



Made in China

# LogiLink®




## USB-C™ 3.2 Gen 2 to HDMI™ Adapter, 0.14 m

Art. No.: UA0380

### Specifications:

Connection 1	USB-C 3.2 Gen 2, male
Connection 2	HDMI-A 19 pin, female
Max. Resolution	4K@60 Hz
Housing Material	ABS
Operating Temperature	0°C–70°C
Storage Temperature	-20°C–85°C
Operating Humidity	10%–90% RH (no condensation)
Storage Humidity	10%–90% RH (no condensation)
Cable Length	0.14 m
Color	Black
Dimensions	19.17x2.13x1.17 cm
Weight	0.016 kg

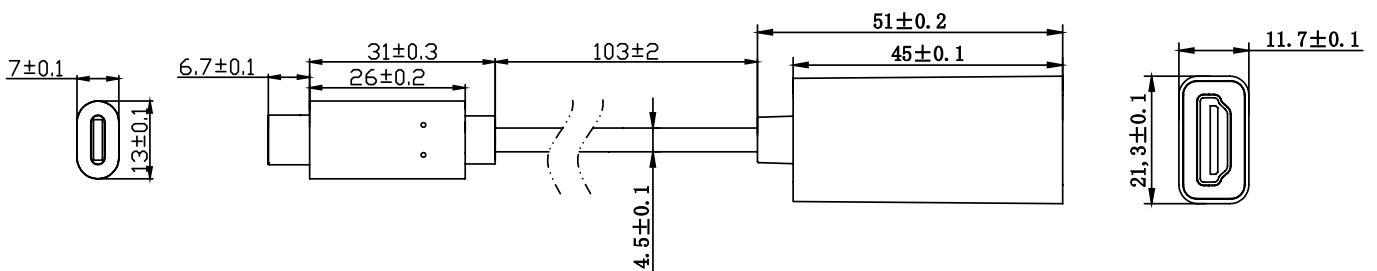

Unit:mm

### Package Content:

- » 1x USB-C 3.2 Gen 2 to HDMI Adapter

### Package Information:

- » Packing Dimension: mm
- » Packing Weight: kg
- » Carton Dimension: mm
- » Carton Q'ty: pcs
- » Carton Weight: kg



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.



UA0380  
4 052792 064247  
Made in China

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Logilink](#) manufacturer:*

Other Similar products are found below :

[CV0036A](#) [FA01SC4](#) [FA02LC3](#) [FA04LC3](#) [AD0011](#) [BP0002](#) [NK0021](#) [NK0023](#) [NP0021](#) [NP0048](#) [NP0057](#) [LPS219](#) [CHB3105](#) [CP0141](#)  
[CQ2091U](#) [CQ2096U](#) [CQ2099S](#) [CV0058](#) [UA0131](#) [UA0216](#) [NK0024](#) [NP0017A](#) [NP0053](#) [CHB1115](#) [CQ2102U](#) [CA1022](#) [CHA0010](#)  
[CHA0030](#) [CHB003](#) [CQ4049S](#) [CQ4102S](#) [CQ5067S](#) [CU0072](#) [CV0021](#) [CV0041](#) [CV0054A](#) [CV0093](#) [CV0094](#) [ID0135](#) [ID0137](#) [FB0001B](#)  
[FB2401B](#) [FB2402B](#) [FB3001](#) [FL0LC02](#) [FL2LC02](#) [FL2SC02](#) [FL3LC02](#) [FL4LC02](#) [FL4SC02](#)