

# MicroStrain Sensing Product Datasheet

## SG-Link<sup>®</sup>-200

### Ruggedized Wireless Analog Input Node



The SG-Link<sup>®</sup>-200 is a 3-channel wireless sensor with rugged, weatherproof enclosure. It includes onboard PGA, filtering, and a high-resolution ADC for precise measurement of a large range of sensor types including strain gages, load cells, pressure transducers, and accelerometers.

Lord wireless sensor networks eliminate the time and complexity of running long sensor wires. They are fast to deploy and provide reliable, lossless data throughput. These networks have been proven to work in demanding industries where reliable data acquisition is critical.

SensorConnect software can be used for device configuration, live data monitoring, and data analysis. SensorCloud is Lord's optional cloud-based platform that optimizes data aggregation, analysis, and alerts for sensor data collected from remote networks.

#### HIGH PERFORMANCE SENSING

- 3 differential input channels
- On-board temperature sensor
- Noise as low as 1  $\mu\text{V}$  p-p
- On-board shunt calibration for strain gages
- Factory installed bridge completion available

#### RUGGED AND WEATHERPROOF

- IP-68 weatherproof enclosure
- AMPSEAL connector
- -40 to +85°C operating temperature
- M8 mounting with compression limiters

#### RELIABLE DATA COLLECTION

- Lossless, synchronized, and scalable networks using LXRS and LXRS+ protocol
- Remotely configure nodes and view sensor data with SensorConnect (PC), SensorCloud (web), or MSCL (API library)

#### CONFIGURABLE FOR MANY APPLICATIONS

- Report raw data and/or derived parameters (mean, RMS, pk-pk)
- Up to 1024 Hz sampling
- Continuous, periodic, or event-triggered operation
- Transmit data real-time and/or save to onboard memory

#### APPLICATIONS

- Strain, load, force, pressure, acceleration, vibration, displacement, or torque sensing
- Condition-based monitoring (CBM)
- Structural load and stress monitoring
- Test and measurement
- Strain gauge rosettes
- Off-highway machine monitoring



ENGINEERING YOUR SUCCESS.


©2020 Parker Hannifin MicroStrain Sensing. | Document 8400-0130 Revision D. | Subject to change without notice.

# Ruggedized Wireless Analog Input Node




## Specifications

Analog Input Channels	
Sensor input channels	3 differential
Sensor excitation output*	Configurable 1.5 or 2.5 V (100 mA)
Measurement range	0 to Excitation voltage (1.5 or 2.5 V)
Adjustable gain	1 to 128
ADC resolution	24 bit
Noise (Gain = 128)	1 $\mu$ Vp-p to 20 $\mu$ Vp-p (filter selection dependent)
Noise (Gain = 1)	15 to 250 $\mu$ Vp-p (filter selection dependent)
Temperature stability	0.172 $\mu$ V/ $^{\circ}$ C (typical)
Digital filter**	Configurable SINC4 low pass filter for reducing noise
Strain calibration	Onboard shunt resistor for deriving linear strain calibration coefficients
Shunt calibration resistor	499k Ohm ( $\pm$ 0.1%)
Integrated Temperature Channel	
Measurement range	-40 $^{\circ}$ C to 85 $^{\circ}$ C
Accuracy	$\pm$ 0.25 $^{\circ}$ C
Sampling	
Sampling modes	Continuous, periodic burst, event triggered
Output options	Analog: Calibrated engineering units, adc counts and derived channels (mean, RMS and peak-peak)
Sampling rates	1 S/hr to 1024 SPS (1 - 2 channels) 1 S/hr to 512 SPS (3 channels)
Sample rate stability	$\pm$ 5 ppm
Network capacity	Up to 128 nodes per RF channel (bandwidth calculator) <a href="http://www.microstrain.com/configure-your-system">www.microstrain.com/configure-your-system</a>
Node synchronization	$\pm$ 50 $\mu$ sec
Data storage capacity	16 MB (up to 8,000,000 data points)
Operating Parameters	
Wireless range	Onboard antenna: 1 km (ideal), 400 m (typical) Indoor/obstructions: 50 m (typical)
Radio frequency (RF)	License-free 2.405 to 2.480 GHz (16 channels)
RF transmit power	User-settable 0 dBm to 20 dBm (restricted regionally)
Power input range	Battery: 3.6 V Lithium D-cell, 1.5 V Alkaline D-cell*** External Input Power: 4.0 - 36 VDC
Battery lifetime	<a href="https://microstrain.com/wireless/sg-link-200">https://microstrain.com/wireless/sg-link-200</a> for details
Operating temperature	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Mechanical Shock Limit	1000g/1.5ms
ESD	4 kV
Physical Specifications	
Sensor Interface	AMPSEAL 14-pin connector with 1.3 mm contacts
Mounting	2 x M8
Ingress Protection	IP68, 3.0m for 30 mins
Enclosure Material	PBT base, polycarbonate lid, stainless steel compression limiters
Dimensions	3.536" x 5" x 2.02" (89.8 x 127 x 51.3 mm)
Weight	326 grams (with battery), 235 grams (without battery)

Integration	
Compatible gateways	All WSDA gateways
Software	SensorCloud, SensorConnect, Windows 7, 8, & 10 compatible
Software development kit	<a href="http://www.microstrain.com/software/mscl">http://www.microstrain.com/software/mscl</a>
Regulatory compliance	FCC (USA), IC (Canada), CE, RoHS (EU), MIC (Japan)

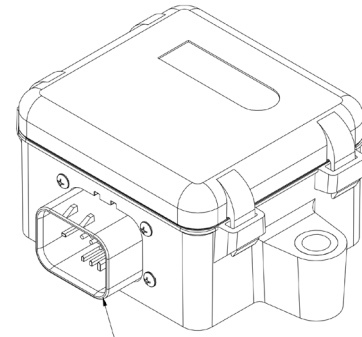

AMPSEAL 16 14-PIN CONNECTOR  
MATES WITH TE 776273-1

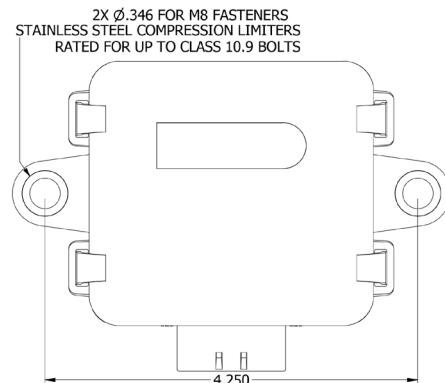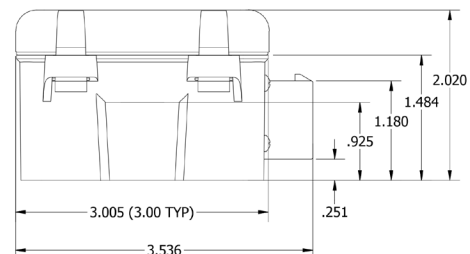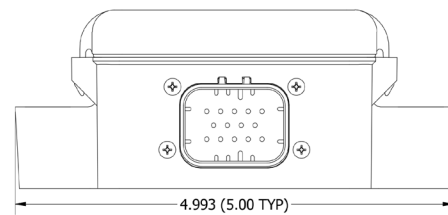

\* Sensor excitation may be duty cycled to conserve power for sampling rates less than 1024 Hz.

\*\* Extend battery life by using a faster filtering setting.

\*\*\* Limited temperature range and transmit power (10 dBm)



Parker Hannifin Corporation  
**MicroStrain Sensing**  
 459 Hurricane Lane  
 Williston, VT 05495 · USA

phone: +1.802.862.6629  
 email: [sensing\\_sales@LORD.com](mailto:sensing_sales@LORD.com)  
[sensing\\_support@LORD.com](mailto:sensing_support@LORD.com)  
[www.microstrain.com](http://www.microstrain.com)  
[www.parker.com](http://www.parker.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multiple Function Sensor Modules](#) category:*

*Click to view products by [LORD](#) manufacturer:*

Other Similar products are found below :

[AD5T](#) [MM7150-AB1](#) [SIBA5-JRAB-DKL](#) [2314277-1](#) [2314277-2](#) [2314291-1](#) [ZMW-SENSOR-1](#) [2316851-1](#) [1-2314277-2](#) [2316852-1](#)  
[2331211-3](#) [2316852-2](#) [2316851-2](#) [1-2314277-1](#) [CS-125HSS-A](#) [eATVS-4](#) [eATVS-8](#) [tvLYT](#) [NGM\\_1](#) [SKU-7000](#) [DFR0759](#) [SG-Link-200](#)  
[SG-Link-200-OEM](#) [V-Link-200](#) [MNS2-9-IN-VM-005](#) [MNS2-9-W2-VD-DC](#) [MNS2-9-W2-VM-005](#) [K6PM-THMD-EIP](#) [K6PM-THS3232](#)  
[WYZBEE-SENS-101](#) [101020932](#) [101990693](#) [SIBA5-JRAB](#) [SIBA5-JREB](#) [SIBA5-JREB-DKL](#) [SIBA-JRA](#) [SIBA-JRAB](#) [SIBA-JRE](#) [SIBA-](#)  
[JREB](#) [SEK](#) [SCC30-DB Sample](#) [ESYS11X](#) [ESYS11X+LOPY915](#) [ESYS11X+LOPY868](#) [Sensit Discovery 3.1](#) [Sensit Discovery 3.2](#) [Sensit](#)  
[Discovery 3.3](#) [Sensit Discovery 3.4](#) [ZEPIR0BBS02MODG](#) [ZEPIR0BAS02MODG](#) [1-2314291-1](#)