



0910 ASL 135




AS-Interface Module with 4-Digital Inputs and 4-Digital Outputs

4 IN / 4 OUT

AS-Interface module with 4 digital inputs to connect standard sensors and 4 digital outputs to connect standard actuators, combined M12 socket, M12 bus connection.

- Replaces module 0910 ASL 109 -

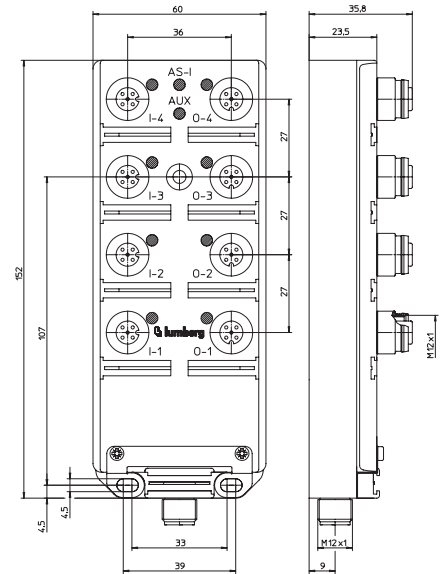




Bit Assignment


Bit	-	-	-	-	3	2	1	0
M12 Input								
Byte 0	-	-	-	-	I-4	I-3	I-2	I-1
M12 Output								
Byte 0	-	-	-	-	O-4	O-3	O-2	O-1

Diagnostic Indication

LED	Indication	Condition
O-1..4 / O-4..4	yellow	channel status
U-AS-i	green	AS-Interface power supply active
AUX	green	actuator supply active

Pin Assignments

Bus connection M12	Input M12	Output M12
 <ul style="list-style-type: none"> 1 = AS-Interface + 2 = 0 V AUX 3 = AS-Interface - 4 = +24 V AUX 	 <ul style="list-style-type: none"> 1 = +24 V 2 = IN 3 = GND (0 V) 4 = IN 5 = n.c. 	 <ul style="list-style-type: none"> 1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 5 = earth



Be Certain with Belden

AS-Interface Module with 4-Digital Inputs and 4-Digital Outputs

0910 ASL 135

Technical Data

Environmental

Degree of protection	IP 67
Operating temperature range	-25°C (-13°F) to +80°C (+176°F)
Weight	200 g
Housing material	PUR

Bus system

AS-Interface profile	AS-Interface Version 2.1 S 7.A.E
I/O configuration	7 hex
ID code	0 hex
ID2 code (extended ID-code)	F hex
Support A/B addressing	yes

Electronics power supply

Rated voltage	AS-Interface AS-Interface net
Voltage range	26.5–31.6 V DC
Power consumption	max. 250 mA
Reverse polarity protection	yes
Indication	LED green

Input power supply

Voltage range (AS-Interface net)	17–30 V
Total current of all sensors	max. 200 mA
Short circuit-proof	yes

Inputs

Rated input voltage	Type 2 acc. to IEC 61131-2 24 V DC
Signal state "1"	Us > 11 V / Is > 6 mA
Signal state "0"	Is < 2 mA
Input current at 24 V	15 mA
Input circuit	p-switching
Number of digital channels	4
Channel status indicator	LED yellow per channel

Output power supply

Rated voltage	AUX 24 V DC
Voltage range	10–30 V
Potential separation	present
Reverse polarity protection	yes/electronic
Indication	LED green

Outputs

Rated output current	Type 2 A acc. to IEC 61131-2 2 A per channel
Short circuit-proof	yes
Max. output current	4 A per module
Overload-proof	yes
Number of digital channels	4
Channel type N.O.	p-switching
Channel status indicator	LED yellow per channel

Diagnostic

Indication	LED red
------------	---------

Connection via cordset, double-ended

M12 / M12	0915 034 101/... M
-----------	--------------------

Included in delivery / Accessories

Dust covers M12	2 pieces
Attachable label	10 pieces

Part Number

0910 ASL 135



The application of these products in harsh environments should always be checked before use.
Specifications subject to alteration.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [XS2R-](#)
[D426-1](#) [XS8A-0441](#) [859RD04-103R004](#)