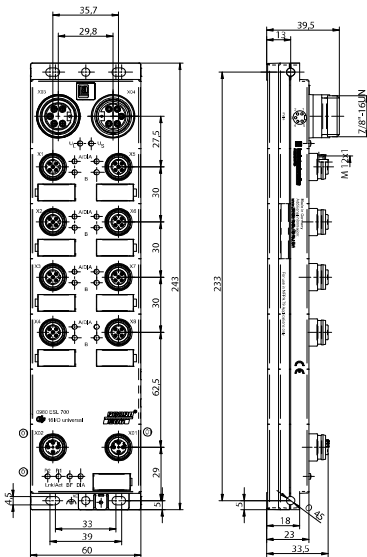





LioN-M PROFINET I/O Modules with 16 Digital Inputs and 16 Digital Outputs



Type	0980 ESL 700
Product Description	LioN-M ProfiNet device with 16 digital I/O channels, channels can be used universally as inputs or outputs, M12 socket, rotary address switches for addressing, M12 LAN-Ports, D-coded, 7/8" power supply

Diagnostic indication		
LED	Indication	Condition
Us	Green	Sensor power supply
UL	Green	Actuator power supply
1...8 A	Yellow	Channel status 1
1...8 DIA A	Red	Periphery fault
1...8 B	Yellow (alternative White)	Channel status 2
1...8 DIA B	Red	Periphery fault
P1 Lnk/Act	Green Yellow flashing Off	Connected to a ProfiNet device I/O device exchanging data No connection to a ProfiNet device
P2 Lnk/Act	Green Yellow flashing Off	Connected to a ProfiNet device I/O device exchanging data No connection to a ProfiNet device
BF	Red Off	Device I/O controller or wrong configuration No faults
DIA	Red Red flashing Off	General indication for periphery faults Firmware update No faults

Bit assignment								
DIA	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A
M12 Output								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

Pin assignment		
LAN connection M12, D-coded  <ul style="list-style-type: none"> 1 = TD+ 2 = RD+ 3 = TD- 4 = RD Housing = shielding 	Power supply 7/8"  <ul style="list-style-type: none"> 1 = GND (0 V) 2 = GND (0 V) 3 = PE/Earth 4 = 24 V 5 = 24 V 	Input/Output M12  <ul style="list-style-type: none"> 1 = +24 V 2 = IN/OUT B 3 = GND (0 V) 4 = IN/OUT A 5 = earth Housing = PE

Part number	Order number
0980 ESL 700	0980 ESL 700





LiON-M PROFINET I/O Modules with 16 Digital Inputs and 16 Digital Outputs

Environmental	
Degree of protection	IP 67
Operating temperature range	-10°C (+14°F) to +60°C (+140°F)
Mechanical	
Weight	380 g
Housing material	PBT
Bus system	PROFINET
Transmission rate	10/100 Mbs
Address range	0 - 255
Rotary address switches	0 - 255
Default address	0
System/Sensors power supply	System power supply
Nominal voltage	24V DC
Voltage range	11–30 V DC
Power consumption	typ. 90 mA
Reverse polarity protection	yes
Input power supply	US
Voltage range	19–30 V DC
Sensor current	200 mA per port (at Tamb 30°C)
Short-circuit proof	yes
Indication	LED green
Inputs	Type 3 acc. to IEC 61131-3
Rated input voltage	24 V DC
Channel type N.O.	p-switching
Number of digital channels	max. 16
Channel status indicator	LED yellow per channel
Diagnostic indication	LED red per socket
Output power supply	UL
Rated voltage	24 V DC
Voltage range	19–30 V DC
Reverse polarity protection	yes/antiparallel diode
Indication	LED green
Diagnostic indication	LED red per socket
Outputs	
Rated output current	1.6 A per channel
Short-circuit proof	yes
Max. output current	9 A (12 A*) per module
Overload-proof	yes
Number of digital channels	max. 16
Channel type N.O.	p-switching
Channel status indicator	LED yellow per channel
Diagnostic indication	LED red per socket
Included in delivery/accessories	
Dust covers M12	4 pieces
Attachable labels	10 pieces

The application of these products in harsh environments should always be checked before use. Specifications subject to alteration.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[89075GULPR](#) [0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-213-1208](#) [0134-213-2209](#) [0025-258-000](#) [60-042022-07P](#) [60-042022-19P](#)
[60-042022-23P](#) [60-042217-10P](#) [0114-201-1278](#) [012-0467-000](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-213-1006](#) [6104-207-2302](#) [6104-](#)
[208-1902](#) [61-168211-04P](#) [61-168617-10P](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-](#)
[211-19149P](#) [6131-216-19149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3100A18-1P-472](#) [CS3100A-36-](#)
[77P](#) [CS3101A-16-55P](#) [CS3102A-10SL-55P](#) [CS3102A-14S-58P](#) [CS3102A-32-17P](#) [CS3102A32-25S](#) [CS3102C18-4P-472](#)
[CS3106A10SL3S004](#) [CS3106A-18-73S](#) [CS3108A-14S-52S](#) [CS3108A-28-51S](#) [6162-233-1277](#) [6162-324-1231](#) [M243082296Z](#)
[M2884010AC1S1](#) [CT0-24-10SC](#) [CT0M20-7PCAU](#) [M28840/17AC1G3](#)