

M12-Splitters/T-Connectors


ASBS 2 M8-90 | ASBS 2 M12...-90



M12 Male to 2xM8 Female

ASBS 2 M8-90

Splitter/T-connector, with two M8 miniature female connectors, 3 poles, 90° with self-locking threaded joint.

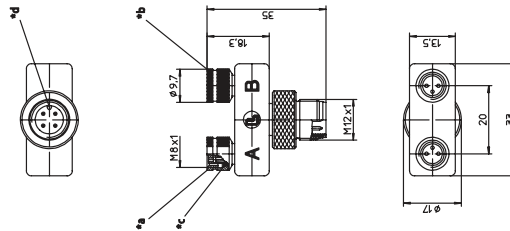


- *a coupling nut black
- *b coupling nut nickel-plated
- *c O-Ring
- *d coding 90°



M12 Male to 2xM12 Female

ASBS 2 M12...-90

Splitter/T-connector with two M12 female connectors, 4 and 5 poles, 90°-version, with self-locking threaded joint.

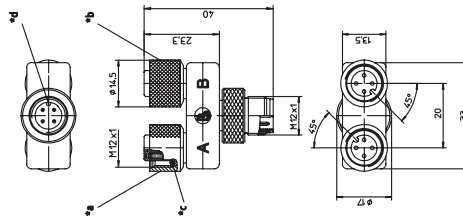

- *a coupling nut black
- *b coupling nut nickel-plated
- *c O-Ring
- *d coding 90°

Pin Assignments

Face Views

ASBS 2 M8-90



A



B



ASBS 2 M12-4S-90



A



B



ASBS 2 M12-5-90



A




B




Wiring Diagrams


ASBS 2 M8-90



ASBS 2 M12-4S-90



ASBS 2 M12-5-90





Be Certain with Belden

M12-Splitters/T-Connectors

ASBS 2 M8-90 | ASBS 2 M12...-90

Technical Data

Environmental



Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body TPU, self-extinguishing
 Insert Female connectors:
 M8: TPU, self-extinguishing
 M12: PA GF, self-extinguishing
 Male connector:
 TPU, self-extinguishing
 Contact CuZn, pre-nickel and 0.8 microns gold-plated
 Coupling nut CuZn, nickel-plated
 O-ring FKM

Electrical

Contact resistance $\leq 5 \text{ m}\Omega$
 Nominal current at 40°C 2 A per outlet / 4 A max. total
 Nominal voltage M8: 60 V
 M12: 4 poles 240 V
 M12: 5 poles 60 V
 Rated voltage M8: 63 V
 M12: 4 poles 250 V
 M12: 5 poles 63 V
 Test voltage M8: 1.0 kV eff. / 60 s
 M12: 4 poles 2.0 kV eff. / 60 s
 M12: 5 poles 1.0 kV eff. / 60 s
 Insulation resistance $> 10^9 \Omega$
 Pollution degree 3

Part Number	Pins	Characteristics
ASBS 2 M8-90	3	
ASBS 2 M12-4S-90	4	
ASBS 2 M12-5-90	5	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-202-1200](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-1009](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [015-9516-002](#) [60-042722-19P](#) [0114-201-1278](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-201-1806](#) [0134-201-2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-202-1400](#) [0134-207-0809](#) [0134-207-1208](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3102C18-4P-472](#) [CS3106A-10SL-53S](#) [CS3106A-10SL-64S](#) [CS3106A-12S-62SX](#) [6162-233-1277](#)