

24


2410 07

USB and IEEE 1394 connectors



USB 2.0 chassis plug type A, angular version, for printed circuit boards, surface mounting technology (SMT)

24 2410 07

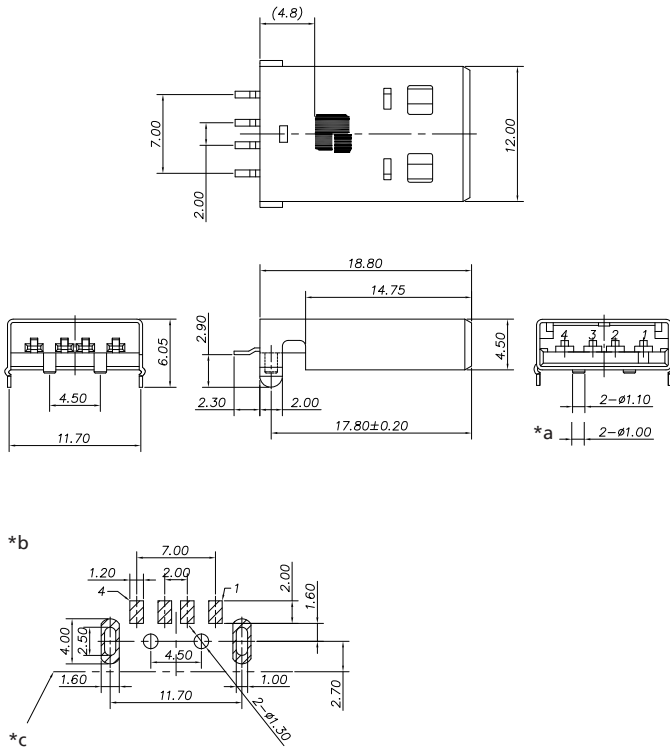

- *a dimension for 2410 07 VP3
- *b printed circuit board layout, components side view
- *c printed circuit board edge

Environmental conditions

Temperature range -55 °C/+105 °C

Materials

Insulating body PBT GF, V-0 according to UL94
 Contact spring Cu alloy, pre-nickel and gold-plated, tin-plated in solder area
 Housing steel, tin-plated

Electrical data (at T_{amb} 20 °C)

Rated current 1 A
 Rated voltage 30 V AC
 Rated impulse voltage 500 V/60 s
 Insulation resistance ≥ 500 MΩ

Associated products

Counterparts
 ☞ 2410 01 ☞ 2410 02 ☞ 2410 03
 ☞ 2410 05 ☞ 2410 06 ☞ 2410 09
 ☞ 2420 01 ☞ 2420 02 ☞ 4512

24

2410 07

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
2410 07	4	100	500
2410 07 VP3	4	600	600

Packaging:

in a tray (2410 07)
on reel (2410 07 VP3)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [XLR Connectors](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[707-0300](#) [8800235](#) [91101181024](#) [91201231](#) [91214571](#) [A3F01](#) [A3M01](#) [QGP3F](#) [HA16PRQ-3SE\(71\)](#) [AA3FL](#) [AAA4FWZ](#) [AAA4MWZ](#)
[AC3-MIC](#) [AC4-MIC](#) [AC5FPZB](#) [AC6AFDZV](#) [AC7FDZB](#) [D4FB](#) [DE4MW](#) [DHNF-BAG](#) [E3MBAUSW](#) [NA2FP-UW](#) [NA3MP-UW](#)
[NC3FBHR1-0](#) [NC3FD-H-0](#) [NC3FK-V](#) [NC3FX-1](#) [NC3FXY-B](#) [NC3MDM3-H-B](#) [NC3MK-V](#) [NC3MXY](#) [NC4FD-LX-0](#) [NC5FX-HD-B](#)
[NC6FSXX-BAG](#) [NC6MD-LX-BAG](#) [NC6MSX-BAG](#) [RT3FC-B-W-D](#) [91210071096](#) [SL05](#) [99.265.0400.0](#) [A3F04](#) [AC3FG](#) [AC3MMG](#) [AC4-FCP](#) [AC4FPZ](#) [AQG4F](#) [2504FP](#) [30-498-2](#) [R6MZ](#) [CXX-15](#)