

M12-Splitters/T-Connectors


ASBS 2 M8-90 | ASBS 2 M12...-90



M12 Male to 2xM8 Female

ASBS 2 M8-90

Splitter/T-connector, with two M8 miniature female connectors, 3 poles, 90° with self-locking threaded joint.

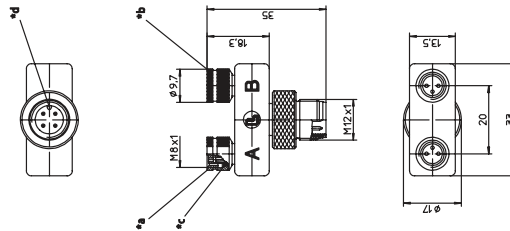


- *a coupling nut black
- *b coupling nut nickel-plated
- *c O-Ring
- *d coding 90°



M12 Male to 2xM12 Female

ASBS 2 M12...-90

Splitter/T-connector with two M12 female connectors, 4 and 5 poles, 90°-version, with self-locking threaded joint.

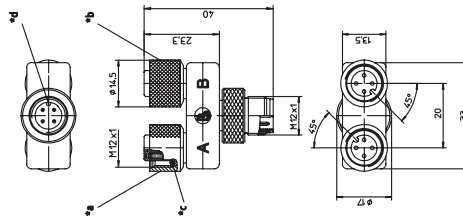

- *a coupling nut black
- *b coupling nut nickel-plated
- *c O-Ring
- *d coding 90°

Pin Assignments

Face Views

ASBS 2 M8-90



A



B



ASBS 2 M12-4S-90



A



B



ASBS 2 M12-5-90



A




B




Wiring Diagrams


ASBS 2 M8-90



ASBS 2 M12-4S-90



ASBS 2 M12-5-90





Be Certain with Belden

M12-Splitters/T-Connectors

ASBS 2 M8-90 | ASBS 2 M12...-90

Technical Data

Environmental




Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body TPU, self-extinguishing
 Insert Female connectors:
 M8: TPU, self-extinguishing
 M12: PA GF, self-extinguishing
 Male connector:
 TPU, self-extinguishing
 Contact CuZn, pre-nickel and 0.8 microns gold-plated
 Coupling nut CuZn, nickel-plated
 O-ring FKM

Electrical

Contact resistance $\leq 5 \text{ m}\Omega$
 Nominal current at 40°C 2 A per outlet / 4 A max. total
 Nominal voltage M8: 60 V
 M12: 4 poles 240 V
 M12: 5 poles 60 V
 Rated voltage M8: 63 V
 M12: 4 poles 250 V
 M12: 5 poles 63 V
 Test voltage M8: 1.0 kV eff. / 60 s
 M12: 4 poles 2.0 kV eff. / 60 s
 M12: 5 poles 1.0 kV eff. / 60 s
 Insulation resistance $> 10^9 \Omega$
 Pollution degree 3

Part Number	Pins	Characteristics
ASBS 2 M8-90	3	
ASBS 2 M12-4S-90	4	
ASBS 2 M12-5-90	5	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [MA1EAF1200](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R4A00A18M020](#) [8R5000A16M005](#) [1200910008](#) [1200910011](#)
[1300140094](#) [130203-0054](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [8R4006A16M010](#) [8R5006A18A120](#) [1604232](#)
[1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [41-40011](#) [41-40017](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-](#)
[00002](#) [43-01166](#) [41-40005](#) [41-40016](#) [43-00161](#) [43-01191](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R4006A16A120](#)
[8R4000A16M010](#) [RKC 50/16](#) [1R3004A20A1201](#) [6-22279-3](#) [N03FA03144](#) [1300140077](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#)
[860RD04-213R004](#) [860-X08-213R004](#) [1-213245-2](#) [2273142-2](#)