

M12 Rugged Distribution Boxes, One Signal Per Socket, On-Board M23 Connection, with or without LED

ASBS-R 4 5-4 | ASBS-R 8 5-4


ASBS-R 4/LED 5-4 | ASBS-R 8/LED 5-4




4- and 8-Ports

ASBS-R pluggable actuator/sensor distributor, 4 or 8 x M12 ports, 4-poles, with LED operating and function display, one signal per socket, ground connection, M23 connection for the control cable, 12-poles

4-Ports

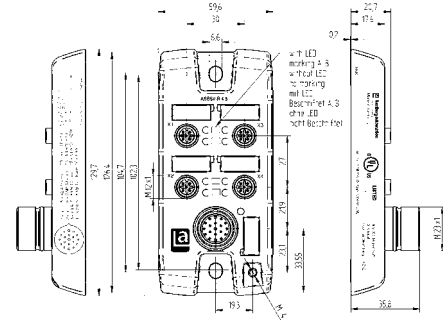


8-Ports

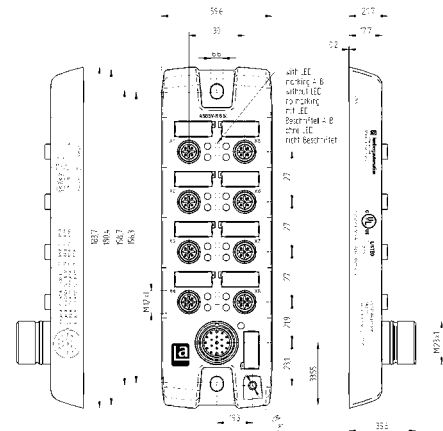


Pin Assignments

M12 Wiring Diagrams

4-Ports



8-Ports





M12 Rugged Distribution Boxes, One Signal Per Socket, On-Board M23 Connection, with or without LED

Technical Data

Environmental Conditions

| | |
|-----------------------------|--|
| Degree of protection | IP65 / IP67 |
| Pollution severity | 3 |
| Operating temperature range | -40°C / +80°C (dragchain and UL max. 60°C) |

Materials

| | |
|----------------|----------------------------------|
| Contact | CuZn, pre-nickel and gold-plated |
| Contact bearer | TPU-GF |
| Housing | Zinc die casting |
| O-ring | FKM |









Electrical Data

| | |
|-----------------------|---|
| Rated voltage | 30 V |
| Rated current* | 4 A per outlet / 12 A max. total; at 40°C |
| Rated impulse voltage | 32 V |
| Contact resistance | ≤5mΩ |
| Insulation resistance | > 10 ⁹ Ω |

* only in locked position with its proper counterparts or dust covers

Additional Technical Data

operation display: LED Green
 Function display / channel status:
 LED Channel A: Yellow

| Part Number | | Ports | Characteristics |
|--------------|------------------|-------|---|
| ASBS-R 4 5-4 | ASBS-R 4/LED 5-4 | 4 |       |
| ASBS-R 8 5-4 | ASBS-R 8/LED 5-4 | 8 |       |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-01088](#) [43-](#)
[01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#)
[8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [RSC 4/9](#) [XS2R-D426-1](#)
[XS8A-0441](#) [859RD04-103R004](#)