


#### M12-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61076-2-101

#### 4-Poles (Stainless Steel / LED)


Actuator/sensor cordset, single-ended, M12, 4-poles, female 90° connector, with LED operation and function indicator, self locking threaded joint and molded cable, hexagon screw in stainless steel.

especially designed for use in food processing equipment applications –

#### PRKWT/LED



\*a O-ring b Hose mounting



### PRKWT/LED



#### **Pin Assignments**

M12 - Male	Wiring Diagrams
4 poles	P pnp normally closed/open = yellow-yellow-green
$3 \circ 0 \circ 0 = 1$ $2 = white$ $3 = blue$ $3 = blue$ $4 = black$	1) 2) 4) 5) 6) 6) 6) 6) 6) 6) 6) 6) 6) 6

# Be Certain with Belden



#### M12-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61076-2-101 PRKWT/LED

#### **Technical Data**

Environmental
---------------

Degree of protection Operating temperature range	IP 67 / 69K / NEMA 6P -25°C (-13°F) / +70°C (+158°F)		
Mechanical			
Housing / Molded body	TPU		
Insert	TPU		
Contact	CuSn, pre-nickeled and		
	0.3 microns gold-plated		
Coupling nut	stainless steel		

EPDM


#### Electrical

0-ring

Liootiioui	
Contact resistance	$\leq$ 5 m $\Omega$
Nominal current at 40°C	4 A
Nominal voltage	10-30 V DC
Rated voltage	32 V
Insulation resistance	$> 10^9 \Omega$
Pollution degree	3

#### **Cable Specifications**

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
07	PVC	4 x 0.25 mm <sup>2</sup>	Orange	.197" (5.0 mm)

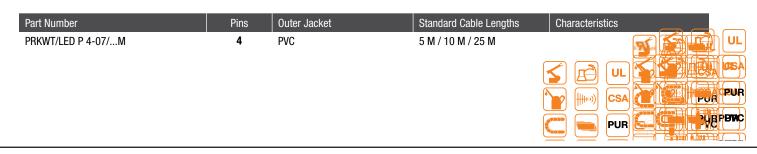

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Sensor Cables / Actuator Cables category:

Click to view products by Lumberg manufacturer:

Other Similar products are found below :

6096360964703000D02F2002703000D02F300703001D02F0602703001D02F300704000D02F120773032K02F030802027107404-1802027213811-1804001A09M150805001A09M050284914-023584914-0237885030A09M0201200651332120065171312006608441200660845120066117312006800711200720053120072008112007200991200720217120080023112008601251200870123120098010212006502671200650298120066018312006607821200660849120066129512006612971200661342120066134312006700801200670220120068033112007202521200730184120086034412008703591200870643120098008120098003112105022111210400542