

**Mini, 7/8" Field Attachable Connectors**

RSC 30-RSC 50 | RKC 30-RKC 50



**Male, 3-, 4-, and 5-Pole**

Field attachable connector, Mini, 7/8" male connector 3-, 4-, and 5-pole with threaded joint, assembling with screw terminals.


**Female, 3-, 4-, and 5-Pole**

Field attachable connector, Mini, 7/8" female




connector 3-, 4-, and 5-pole with threaded joint, assembling with screw terminals.

**RSC 30-RSC 50**

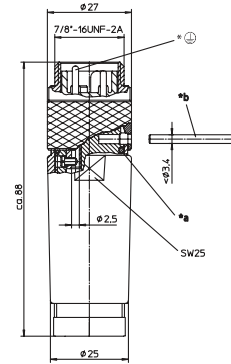

- \*a O-ring
- \*b Pin or screwdriver as assembly tool
- \*⊕ Contact 1.5 leading

**RKC 30-RKC 50**




- \*a O-ring
- \*b Pin or screwdriver as assembly tool


**Pin Assignments**

Mini, 7/8" - Male / Female


**3 poles**



**4 poles**



**5 poles**



# Be Certain with Belden

## Mini, 7/8" Field Attachable Connectors RSC 30-RSC 50 | RKC 30-RKC 50

### Technical Data

#### Environmental






















Degree of protection IP 67 / NEMA 6P  
Operating temperature range -40°C (-40°F) / +90°C (+194°F)

#### Mechanical

Housing / Molded body PA  
Insert TPU, self-extinguishing  
Contact CuZn, gold over nickel plated  
Coupling nut Al anodized  
O-ring NBR  
Mode of connection screw terminals  
Connectable conductor max. 1.5 mm<sup>2</sup>

#### Electrical

Contact resistance ≤ 5 mΩ  
Nominal current at 40°C 3 poles 12 A  
4-5 poles 9 A  
Nominal voltage 240 V  
Rated voltage 250 V  
Test voltage 3 poles 2.5 kV eff. / 60 s  
4-5 poles 1.5 kV eff. / 60 s  
Insulation resistance > 10<sup>9</sup> Ω  
Pollution degree 3

Part Number		Pins	Cable Diameter Range	Characteristics
Male	Female			
RSC 30/9	RKC 30/9	3	Ø 6.0 - 8.0 mm	
RSC 30/11	RKC 30/11		Ø 8.0 - 10.0 mm	 
RSC 30/13.5	RKC 30/13.5		Ø 10 - 12.0 mm	 
RSC 30/16	RKC 30/16		Ø 12 - 14.0 mm	 
RSC 40/9	RKC 40/9	4	Ø 6.0 - 8.0 mm	
RSC 40/11	RKC 40/11		Ø 8.0 - 10.0 mm	 
RSC 40/13.5	RKC 40/13.5		Ø 10 - 12.0 mm	 
RSC 40/16	RKC 40/16		Ø 12 - 14.0 mm	 
RSC 50/9	RKC 50/9	5	Ø 6.0 - 8.0 mm	
RSC 50/11	RKC 50/11		Ø 8.0 - 10.0 mm	 
RSC 50/13.5	RKC 50/13.5		Ø 10.0 - 12.0 mm	 
RSC 50/16	RKC 50/16		Ø 12.0 - 14.0 mm	 

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [Lumberg](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)  
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)  
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)  
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)  
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [XS2R-](#)  
[D426-1](#) [XS8A-0441](#) [859RD04-103R004](#)