

M8-Receptacle Connectors In Accordance With IEC 61076-2-104


RSMHL.../S 5.5 | RKMHL.../S 5.5



Male, 3- and 4-Pole

Receptacle connector, M8 male connector for back mounting, printed contacts, chassis side thread M10 x 1 (panel nut included).

RSMHL.../S 5.5

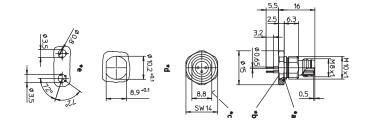


RKMHL.../S 5.5

- *a O-ring
 *b solder contacts potted with epoxy
 *c anti-rotation protection
 *d cut out for anti-rotation
- *e hole pattern in printed circuit board



Female, 3- and 4-Pole

Receptacle connector, M8 female connector for back mounting, printed contacts, chassis side thread M10 x 1 (panel nut included).



- *a O-ring
 *b solder contacts potted with epoxy
 *c anti-rotation protection
 *d cut out for anti-rotation
 *e hole pattern in printed circuit board

Pin Assignments

Face Views

M8 - 3 poles





M8 - 4 poles





Be Certain with Belden



M8-Receptacle Connectors In Accordance With IEC 61076-2-104

RSMHL.../S 5.5 | RKMHL.../S 5.5

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P

Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body CuZn, nickel-plated

Insert RSMHL: PA

RKMHL: TPU, self-extinguishing Contact CuZn, pre-nickeled and

0.8 microns gold-plated

O-ring FKM

Electrical

 $\begin{array}{ll} \mbox{Contact resistance} & \leq 5 \mbox{ m}\Omega \\ \mbox{Nominal current at } 40\mbox{°C} & 4 \mbox{ A} \\ \end{array}$

Nominal voltage 3 poles 60 V

4 poles 30 V

encapsulated

Test voltage 1.5 kV eff. / 60 s

Insulation resistance $> 10^9 \,\Omega$

Pollution degree 3

Part Numl	per	Pins	Characteristics
RSMHL 3/	S 5,5 RKMHL 3/S 5,5	3	
RSMHL 4/	S 5,5 RKMHL 4/S 5,5	4	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Metric Connectors category:

Click to view products by Lumberg manufacturer:

Other Similar products are found below:

600X518037X MA1EAF1200 6STD15PCR99B70A 8R4000A16M020 8R4A00A18M020 8R5000A16M005 1200910008 1200910011 1300140094 130203-0054 1300150099 RF-12S1N8A90DU 1-3637-600-5205 1612618 8R4006A16M010 8R5006A18A120 1604232 1R3006A20M005 RF-12P1N8A80DU RF-12P1N8A90DU 41-01016 41-40011 41-40017 42-01015 4-22279-4 4-22281-1 4-22284-9 43-00002 43-01166 41-40005 41-40016 43-00161 43-01191 XS3P-M421-2 600X518050X SACC-DSI-FS-5P-PG9-L180 SC 8R4006A16A120 8R4000A16M010 RKC 50/16 1R3004A20A1201 6-22279-3 N03FA03144 1300140077 XS8A-0441 859RD04-103R004 860RD04-113R004 860RD04-213R004 860-X08-213R004 1-213245-2 2273142-2