

M12-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61076-2-101


RKT | RKWT



3-, 4-, 5-, 8-, and 12-Poles

Actuator/sensor cordset, single-ended, M12, 3-, 4-, 5-, 8-, and 12-poles, female straight connector with self-locking thread and molded cable.

RKT

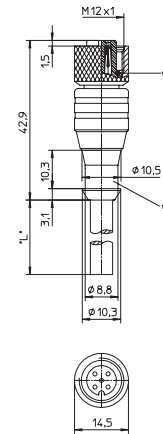


*a O-ring
* b Hose mounting



Actuator/sensor cordset, single-ended, M12, 3-, 4-, 5-, 8-, and 12-poles, female 90° connector with self-locking thread and molded cable.

RKWT




*a O-ring
* b Hose mounting


Pin Assignments

M12 - Male


3 poles




4 poles




5 poles




6 poles



8 poles



12 poles





**Cordsets
Single-Ended**

M12-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61076-2-101 RKT | RKWT

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body TPU
Insert TPU
Contact CuSn (12 poles: CuZn), pre-nickeled and 0.3 microns gold-plated
Coupling nut CuZn, nickel-plated
O-ring FKM

Electrical

Contact resistance ≤ 5 mΩ
Nominal current at 40°C 3-5 poles 4 A, 6-12 poles 2 A
Rated voltage 3-4 poles 250 V
5 poles 63 V, 6-12 poles 36 V

Cable Specifications

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
06	PVC	3 x 0.34 mm ²	Orange	.197" (5.0 mm)
07	PVC	4 x 0.25 mm ²	Orange	.197" (5.0 mm)

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
56	PVC	5 x 0.34 mm ²	Orange	.224" (5.7 mm)
224	PUR, halogen-free	3 x 0.34 mm ²	Black	.169" (4.3 mm)
225	PUR, halogen-free	4 x 0.34 mm ²	Black	.185" (4.7 mm)
228	PUR, halogen-free	5 x 0.50 mm ²	Black	.213" (5.4 mm)
251	PUR, halogen-free welding spark proof	4 x 0.34 mm ²	Orange	.185" (4.7 mm)
259	PUR, halogen-free welding spark proof	5 x 0.50 mm ²	Orange	.217" (5.5 mm)
260	PUR, halogen-free welding spark proof	3 x 0.34 mm ²	Orange	.177" (4.5 mm)
268	PUR, halogen-free welding spark proof	6 x 0.34 mm ²	Orange	.236" (6.0 mm)
282	PUR, halogen-free	7 x 0.25 mm ²	Black	.236" (6.0 mm)
337	PUR, halogen-free	6 x 0.34 mm ²	Black	.236" (6.0 mm)
346	PUR, halogen-free	12 x 0.25 mm ²	Black	.252" (6.4 mm)

Part Number		Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RKT 4-3-06/...M	RKWT 4-3-06/...M	3	PVC	2 M / 5 M / 10 M	
RKT 4-3-224/...M	RKWT 4-3-224/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RKT 4-3-260/...M	RKWT 4-3-260/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RKT 4-07/...M	RKWT 4-07/...M	4	PVC	2 M / 5 M / 10 M	
RKT 4-225/...M	RKWT 4-225/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RKT 4-251/...M	RKWT 4-251/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RKT 5-56/...M	RKWT 5-56/...M	5	PVC	2 M / 5 M / 10 M	
RKT 5-228/...M	RKWT 5-228/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RKT 5-259/...M	RKWT 5-259/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RKT 8-6-268/...M	RKWT 8-6-268/...M	6	PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RKT 8-6-337/...M	RKWT 8-6-337/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RKT 8-282/...M	RKWT 8-282/...M	8	PUR, halogen-free	2 M / 5 M / 10 M	
RKT 12-346/...M	RKWT 12-346/...M	12	PUR, halogen-free	2 M / 5 M / 10 M	

Cordsets
Single-Ended

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lumberg manufacturer](#):

Other Similar products are found below :

[RK20-603/5M](#) [ASBS-R 8/LED 5-4](#) [KRE8](#) [RK30/2M](#) [ASBS-R 4 5-4](#) [ASBS-R 4/LED 5-4](#) [KB3](#) [KRES10](#) [KRESS8](#) [KS8](#) [0304 04](#) [0304 05-1](#)
[0332 05-1](#) [KRM 07](#) [0103 03](#) [0107 03](#) [WKV 81](#) [0332 05](#) [RK 30-738/20F](#) [RKT 4-602/5M](#) [RKT 5-644/2M](#) [RKT 4-679/5M](#) [ASBS 2 M12-](#)
[S2326](#) [1614 16](#) [0985 706 100/10M](#) [1522 01](#) [RST 4-RKWT 4-602/1M](#) [RST 4-RKT 4-679/2M](#) [WKV50](#) [RST 4-633/2M](#) [RST 4-RKWT 4-](#)
[602/3M](#) [RS-TU](#) [RKMWV 3-06/2 M](#) [WSV 30](#) [0986 EMC 102](#) [KLS 10](#) [0250 05](#) [RKWT 5-612/5M](#) [RST 4-RKT 4-225/2 M](#) [0980 ESL 393-121](#)
[RST 5L-RKT 5L-949/5 M](#) [RST 5L-RKT 5L-949/10 M](#) [RKT 4-646/2M](#) [RKHL 8/S 5,5](#) [0985 YM57530 100/20M](#) [0985 YM57530 500/1M](#)
[RST 4-RKT 4-637/2M](#) [RKT 5L-949/5 M](#) [RST 3-RKMV 3-224/2 M](#) [RST 5-RKT 5-647/5M](#)