

Mini, 1"-Round-Plug Connector, Single-Ended Cordsets, US Color Code



RS 701M...801M | RK 70M...80M



7-, and 8-Poles



Mini, 1" single-ended cordsets, male straight, 7-, and 8-poles with internal threads and molded PUR cable, US color code.

RS

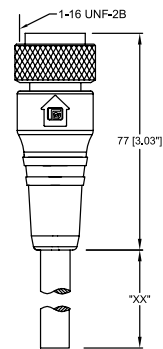

Mini, 1" single-ended cordsets, female straight, 7-, and 8-poles with internal threads and molded PUR cable, US color code.


RK

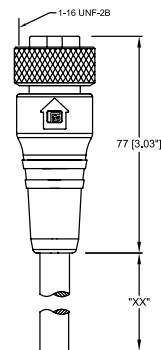

Pin Assignments


Mini, 1" - Male / Female

7 poles



1 = white/black
2 = black
3 = white
4 = red
5 = orange
6 = blue
7 = green

8 poles



1 = orange
2 = blue
3 = white/black
4 = black
5 = white
6 = red
7 = green
8 = red/black

Be Certain with Belden



**Cordsets
Single-Ended**

Cordsets
Single-Ended

Mini, 1”-Round-Plug Connector, Single-Ended Cordsets, US Color Code RS 701M...801M | RK 70M...80M

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
Operating temperature range -40°C (-40°F) / +90°C (194°F)

Mechanical



Housing / Molded body TPU, yellow
Insert TPU, yellow
Contact CuZn, gold over silver plated
Coupling nut Aluminum, anodized black

Electrical

Current rating 7 pole: 8 A
8 pole: 7 A
Voltage rating 300 V

Cable Specifications - US Color Code

Cable No.	Outer Jacket	Gauge	Jacket Color	OD	Temperature Rating	Agency Approvals
649	PUR	18AWG	Yellow	.270" (6.9 mm)	-40°C (-40°F) to +80°C (176°F)	UL: AWM 20233 / CSA: AWM I/II A/B
650	PUR	18AWG	Yellow	.292" (7.4 mm)	-40°C (-40°F) to +80°C (176°F)	UL: AWM 20233 / CSA: AWM I/II A/B

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RS 701M-649/...F RK 70M-649/...F	7	PUR	6 F / 12 F / 15 F / 20 F / 30 F	
RS 801M-650/...F RK 80M-650/...F	8	PUR	6 F / 12 F / 15 F / 20 F / 30 F	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703000D02F300](#) [703001D02F0602](#) [703001D02F1201](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#)
[802027107404-1](#) [802027213811-1](#) [804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [1200651332](#)
[1200651713](#) [1200660844](#) [1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#)
[1200860125](#) [1200870123](#) [1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#)
[1200661342](#) [1200661343](#) [1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200720255](#) [1200730184](#) [1200860344](#) [1200870359](#)
[1200870643](#) [1200980008](#) [1200980031](#)