


M12 Field Attachable Connectors

RSCW | RKCW




Male, 3-, 4-, 5-, and 8-Pole (90°)

Field attachable connector, M12 male right angle connector, 3-, 4-, 5-, and 8-pole with threaded joint, assembling with screw terminals.

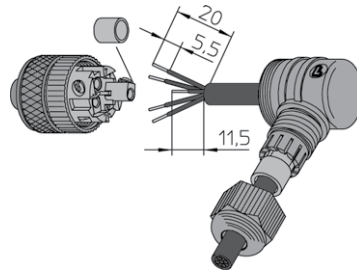

RSCW




*a O-Ring
*b gasket
*c cap nut




Female, 3-, 4-, 5-, and 8-Pole (90°)

Field attachable connector, M12 female right angle connector, 3-, 4-, 5-, and 8-pole with threaded joint, assembling with screw terminals.

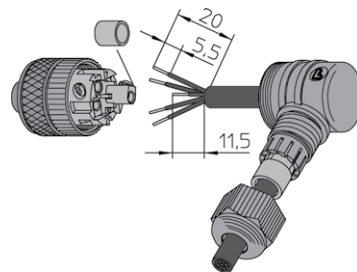

RKCW




*a O-Ring
*b gasket
*c cap nut
*d insert 90° rotatable


Pin Assignments

Face Views / M12, Male / Female


3 pole




4 pole



5 pole



8 pole





Be Certain with Belden

M12 Field Attachable Connectors

RSCW | RKCW

Technical Data

Environmental














Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body PBT
 Insert PBT
 Contact CuZn, pre-coppered, CuSnZn
 8-poles pre-nickeled, gold-plated
 Receptacle shell CuZn, nickel-plated
 O-ring FKM
 Mode of connection Screw terminals
 Connectable conductor 3-5 poles max. 0.75 mm²
 8 poles max. 0.50 mm²

Electrical

Contact resistance ≤ 5 mΩ
 Nominal current at 40°C 3-5 poles 4 A
 8 poles 2 A
 Nominal voltage 3-4 poles 240 V
 5 poles 60 V
 8 poles 30 V
 Rated voltage 3-4 poles 250 V
 5 poles 63 V
 8 poles 36 V
 Test voltage 3-4 poles 2.0 kV eff. / 60 s
 5 poles 1.5 kV eff. / 60 s
 8 poles 0.9 kV eff. / 60 s
 Insulation resistance > 10⁹ Ω
 Pollution degree 3

| Part Number | | Pins | Cable Diameter Range | Characteristics |
|-------------|------------|------|----------------------|---|
| Male | Female | | | |
| RSCW 3/7 | RKCW 4/3/7 | 3 | Ø 3.0-6.5 mm /SW 15 |   |
| RSCW 3/9 | RKCW 4/3/9 | | Ø 4.0-8.0 mm /SW 19 |   |
| RSCW 4/7 | RKCW 4/7 | 4 | Ø 3.0-6.5 mm /SW 15 |   |
| RSCW 4/9 | RKCW 4/9 | | Ø 4.0-8.0 mm /SW 19 |   |
| RSCW 5/7 | RKCW 5/7 | 5 | Ø 3.0-6.5 mm /SW 15 |   |
| RSCW 5/9 | RKCW 5/9 | | Ø 4.0-8.0 mm /SW 19 |   |
| RSCW 8/9 | RKCW 8/9 | 8 | Ø 4.0-8.0 mm /SW 19 |  |

Field Attachable Connectors

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [XS2R-](#)
[D426-1](#) [XS8A-0441](#) [859RD04-103R004](#)