

M12-Receptacle Connectors In Accordance With IEC 61076-2-101


RSFM/0.5 M | RKFM/0.5 M



Male, 3-, 4-, 5- and 8-Pole

Receptacle connector, combined FIXCON/M12 male connector for front mounting, assembled stranded wire, solder contacts potted with epoxy, chassis side thread M16 x 1.5 (panel nut RSKFM 16).

RSFM/0.5 M

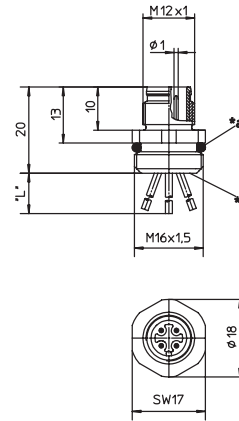

*a O-ring enclosed separately

*b solder contacts potted with epoxy


L 0,5 m



Female, 3-, 4-, 5- and 8-Pole

Receptacle connector, combined FIXCON/M12 female connector for front mounting, assembled stranded wire, solder contacts potted with epoxy, chassis side thread M16 x 1.5 (panel nut RSKFM 16).

RKFM/0.5 M

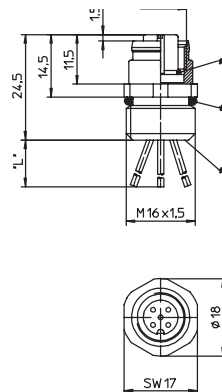

*a O-Ring


*b O-ring enclosed separately

*c solder contacts potted with epoxy

Pin Assignments


Face Views / M12, Male / Female

3 pole




1 = brown
3 = blue
4 = black

4 pole




1 = brown
2 = white
3 = blue
4 = black

5 pole



1 = brown
2 = white
3 = blue
4 = black
5 = green/yellow

8 pole



1 = white
2 = brown
3 = green
4 = yellow
5 = grey
6 = pink
7 = blue
8 = red



Be Certain with Belden

M12-Receptacle Connectors In Accordance With IEC 61076-2-101
 RSFM/0.5 M | RKFM/0.5 M

Technical Data

Environmental









Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body CuZn, nickel-plated
 Insert PA
 Contact 8 poles TPU
 CuZn, pre-nickel and 0.8 microns gold-plated
 O-ring FKM

Electrical

Contact resistance ≤ 5 mΩ
 Nominal current at 40°C 3-5 poles 4 A
 8 poles 1,5 A
 Nominal voltage 3-4 poles 240 V
 5 poles 60 V
 poles 30 V
 Rated voltage 3-4 poles 250 V
 5 poles 63 V
 8 poles 36 V
 Test voltage 3-4 poles 2.0 kV eff. / 60 s
 5-8 poles 1.5 kV eff. / 60 s
 Insulation resistance > 10⁹ Ω
 Pollution degree 3

Part Number	Pins	Leads (mm ²)	Characteristics
RSFM 3/0.5 M RKFM 4-3/0.5 M	3	0.34	 
RSFM 4/0.5 M RKFM 4/0.5 M	4	0.34	 
RSFM 5/0.5 M RKFM 5/0.5 M	5	4 x 0.34 / 1 x 0.50	 
RSFM 8/0.5 M RKFM 8/0.5 M	8	0.25	 

Receptacles

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [M83513/19-F01CP](#) [703000D02F2002](#) [703000D02F300](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#)
[802027107404-1](#) [802027213811-1](#) [804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [1200651332](#)
[1200651713](#) [1200660844](#) [1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#)
[1200860125](#) [1200870123](#) [1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#)
[1200661342](#) [1200661343](#) [1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#)
[1200980008](#) [1200980031](#) [1210502211](#)