

M12-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61076-2-101


RST



3-, 4-, 5-, and 8-Poles

Actuator/sensor cordset, single-ended, M12,
3-, 4-, 5-, and 8-poles, male straight connector
with self-locking thread and molded cable.

RST

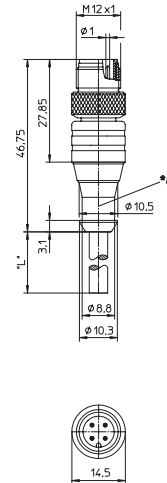


**a* hose mounting


Pin Assignments

M12 - Male


3 poles




4 poles



5 poles



8 poles



Be Certain with Belden

M12-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61076-2-101 RST

Technical Data

Environmental

Degree of protection	IP 67 / NEMA 6P
Operating temperature range	-25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body	TPU
Insert	TPU
Contact	CuSn, pre-nickel and 0.3 microns gold-plated
Coupling nut	CuZn, nickel-plated

Electrical

Contact resistance	≤ 5 mΩ
Nominal current at 40°C	3–5 poles 4 A 8 poles 2 A
Nominal voltage	3–4 poles 240 V 5 poles 60 V 8 poles 30 V
Rated voltage	3–4 poles 250 V 5 poles 63 V 8 poles 36 V
Test voltage	3–4 poles 2.0 kV eff. / 60 s 5–8 poles 1.5 kV eff. / 60 s
Insulation resistance	> 10 ⁹ Ω
Pollution degree	3

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
06	PVC	3 x 0.34 mm ²	Orange	.197" (5.0 mm)
07	PVC	4 x 0.75 mm ²	Orange	.197" (5.0 mm)
56	PVC	5 x 0.34 mm ²	Orange	.224" (5.7 mm)
224	PUR, halogen-free	3 x 0.34 mm ²	Black	.169" (4.3 mm)
225	PUR, halogen-free	4 x 0.34 mm ²	Black	.185" (4.7 mm)
228	PUR, halogen-free	5 x 0.50 mm ²	Black	.213" (5.4 mm)
251	PUR, halogen-free welding spark proof	4 x 0.34 mm ²	Orange	.185" (4.7 mm)
259	PUR, halogen-free welding spark proof	5 x 0.50 mm ²	Orange	.217" (5.5 mm)
260	PUR, halogen-free welding spark proof	3 x 0.34 mm ²	Orange	.177" (4.5 mm)
282	PUR, halogen-free	7 x 0.25 mm ²	Black	.236" (6.0 mm)
344	PUR, halogen-free	7 x 0.25 mm ²	Black	.236" (6.0 mm)

Cable Specifications

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RST 3-06/...M	3	PVC	2 M / 5 M / 10 M	
RST 3-224/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RST 3-260/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RST 4-07/...M	4	PVC	2 M / 5 M / 10 M	
RST 4-225/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RST 4-251/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RST 5-56/...M	5	PVC	2 M / 5 M / 10 M	
RST 5-228/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RST 5-259/...M		PUR, halogen-free / welding spark proof	2 M / 5 M / 10 M	
RST 8-282/...M	8	PUR, halogen-free	2 M / 5 M / 10 M	
RST 8-344/...M		PUR, halogen-free	10 M	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703000D02F300](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#)
[804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [1200651332](#) [1200651713](#) [1200660844](#) [1200660845](#)
[1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#) [1200980102](#)
[1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#) [1200670080](#)
[1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#) [1200980008](#) [1200980031](#) [1210502211](#)
[1210400542](#) [1211810021](#)