

**M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101**


RST -RKT | RST-RKWT



**3-, 4-, 5- and 8-Poles**


Actuator/sensor cordset, double-ended, M12, 3-, 4-, 5- and 8-poles, male straight to female straight connector with self-locking thread and molded TPE, PUR, or PVC cable, IEC color code.

**RST-RKT**



Actuator/sensor cordset, double-ended, M12, 3-, 4-, 5- and 8-poles, male straight to female 90° connector with self-locking thread and molded TPE, PUR, or PVC cable, IEC color code.

**RST-RKWT**

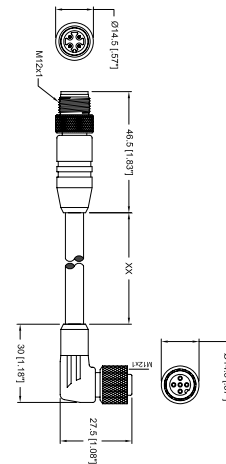


**Pin Assignments**

M12 - Male/Female

**3 poles**




**4 poles**




**5 poles (794)**



**5 poles (all others)**



**8 poles**





## M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101

RST-RKT | RST-RKWT

### Technical Data

#### Environmental

Degree of protection	IP 67 / NEMA 6P
Operating temperature range	PUR: -40°C (-40°F) / +80°C (176°F) PVC: -40°C (-40°F) / +90°C (194°F) TPE: -40°C (-40°F) / +90°C (194°F)

#### Mechanical

Housing / Molded body	PUR, yellow RST 8-RKT 8-627: PUR, black RST 8-RKWT 8-627: PUR, black
Insert	PUR, Yellow RST 8-RKT 8-627: PUR, orange RST 8-RKWT 8-627: PUR, orange
Contacts	CuSn, gold over nickel-plated
Coupling nut	CuZn, nickel-plated
O-ring (female only)	FKM or Viton

#### Electrical

Current rating	4 A
RST 8-RKT 8-XXX:	1.5A
Voltage rating	250 V 5-Pole: 60V 8-Pole: 30 V AC /36 V DC

### Cable Specifications

Cable No.	Outer Jacket	Gauge	Jacket Color	OD
<b>602</b>	<b>PUR</b>	<b>18AWG</b>	Yellow	.230" (5.8 mm)
Continuous flex rating and suitable for general C-track usage. 1 million cycles at minimum bend radius 10X cable diameter.				
<b>610</b>	<b>PUR</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>612</b>	<b>PVC</b>	<b>22AWG</b>	Yellow	.210" (5.3 mm)
<b>627</b>	<b>PVC</b>	<b>24AWG</b>	Black	.232" (5.9 mm)
<b>632</b>	<b>PVC</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>633</b>	<b>PVC</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>637</b>	<b>TPE/PLTC</b>	<b>18AWG</b>	Yellow	.280" (7.1 mm)
<b>643</b>	<b>TPE/PLTC</b>	<b>22AWG</b>	Yellow	.246" (6.2 mm)
<b>644</b>	<b>PUR</b>	<b>22AWG</b>	Yellow	.210" (5.3 mm)
<b>645</b>	<b>PUR</b>	<b>18AWG</b>	Yellow	.220" (5.6 mm)
<b>679</b>	<b>PUR</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>713</b>	<b>TPE/PLTC</b>	<b>22AWG</b>	Yellow	.280" (7.1 mm)
<b>727</b>	<b>TPE/PLTC</b>	<b>22AWG</b>	Yellow	.335" (8.5 mm)
<b>731</b>	<b>TPE/PLTC</b>	<b>18AWG</b>	Yellow	.261" (6.6 mm)
<b>794</b>	<b>TPE/PLTC</b>	<b>18AWG</b>	Yellow	.304" (7.7 mm)

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RST 3-RKT 4-3-731/...M RST 3-RKWT 4-3-731/...M	3	TPE/PLTC	2 M / 5 M / 10 M	
RST 3-RKT 4-3-632/...M RST 3-RKWT 4-3-632/...M		PVC	2 M / 5 M / 10 M	
RST 3-RKT 4-3-645/...M RST 3-RKWT 4-3-645/...M		PUR	2 M / 5 M / 10 M	
RST 3-RKT 4-3-610/...M RST 3-RKWT 4-3-610/...M		PUR	2 M / 5 M / 10 M	
RST 4-RKT 4-637/...M RST 4-RKWT 4-637/...M	4	TPE/PLTC	1 M / 2 M / 3 M / 5 M / 6 M / 10 M	
RST 4-RKT 4-633/...M RST 4-RKWT 4-633/...M		PVC	2 M / 5 M / 10 M	
RST 4-RKT 4-643/...M RST 4-RKWT 4-643/...M		TPE/PLTC	1 M / 2 M / 5 M / 10 M	
RST 4-RKT 4-602/...M RST 4-RKWT 4-602/...M		PUR	1 M / 2 M / 3 M / 4 M / 5 M / 6 M / 10 M	
RST 4-RKT 4-679/...M RST 4-RKWT 4-679/...M		PUR	2 M / 5 M / 10 M	
RST 5-RKT 5-612/...M RST 5-RKWT 5-612/...M	5	PVC	2 M / 5 M / 10 M	
RST 5-RKT 5-644/...M RST 5-RKWT 5-644/...M		PUR	2 M / 5 M / 10 M	
RST 5-RKT 5-713/...M RST 5-RKWT 5-713/...M		TPE/PLTC	2 M / 5 M / 10 M	
RST 5-RKT 5-794/...M RST 5-RKWT 5-794/...M		TPE/PLTC	2 M / 5 M / 10 M	
RST 8-RKT 8-627/...M RST 8-RKWT 8-627/...M	8	PVC	2 M / 5 M / 10 M	
RST 8-RKT 8-727/...M RST 8-RKWT 8-727/...M		TPE/PLTC	2 M / 5 M / 10 M	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Cables / Actuator Cables](#) category:*

*Click to view products by [Lumberg](#) manufacturer:*

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703000D02F300](#) [703001D02F0602](#) [703001D02F1201](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#)  
[802027107404-1](#) [802027213811-1](#) [804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [1200651332](#)  
[1200651713](#) [1200660844](#) [1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#)  
[1200860125](#) [1200870123](#) [1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#)  
[1200661342](#) [1200661343](#) [1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200720255](#) [1200730184](#) [1200860344](#) [1200870359](#)  
[1200870643](#) [1200980008](#) [1200980031](#)