

# N27D RAIL-MOUNTED NETWORK METER

## FEATURES:

**63 A**

## INPUTS:

**V A**

**W Hz**



## GALVANIC ISOLATION:



- Direct measurement up to 63A.
- Measurement of: RMS current (a.c.) and voltage (a.c.), active power and frequency.
- Switched measured value.
- 4-digit display in yellow colour.
- Backlighted indicator of displayed value.
- Modern design allows for installation of the meter in modular switchgear in accordance with EN 62208 (meter has a width of 3 modules) on 35 mm rail.

### INPUTS

Kind of input	Measuring range	Parameters	Basic error
Voltage input U	0... <u>0.01</u> ... <u>1.2</u> Un	input resistance: > 3 MΩ	± (0.5% of the range) in frequency range 40...500 Hz
Current input I	0... <u>0.01</u> ... <u>1.2</u> In		± (0.5% of the range) in frequency range 45...65 Hz
Voltage frequency	0... <u>2.00</u> ... <u>500.0</u> Hz		± (0.02% of the range)
Current frequency	0... <u>45.00</u> ... <u>500.00</u> Hz		
Active power	-45.4 ... <u>-31.5</u> ... <u>31.50</u> ... 45,36 kW at frequency 45... 65 Hz		± (1% of the range) at frequency 45...65 Hz

### EXTERNAL FEATURES

Readout field	4-digit LED displays - digit height: 8,5 mm - yellow, indication range: -1999...9999	
Weight	< 0.25 kg	
Overall dimensions	53 x 110 x 60 mm	Bezel: 45 × 53 mm
Protection grade	IP00	acc. to EN 60529
Fixing	on a 35 mm rail	acc. to EN 60715

### RATED OPERATIONS CONDITIONS

Supply voltage	230 V ± 10% a.c. (45...65 Hz)	Power consumption < 6 VA
Input voltage Un	500 V a.c. 0... <u>2</u> ... <u>40.0</u> ... <u>500.0</u> Hz	
Input current In	63 A a.c. 0... <u>45.0</u> ... <u>500.0</u> Hz	
Temperature	ambient: -10... <u>23</u> ...55°C	Storage: -25...85°C
Relative humidity	< 95%	Condensation inadmissible
Operating position	any	


Export department:  
+48 68 45 75 139/ 321/ 368  
Fax: +48 68 32 54 091  
e-mail: export@lumel.com.pl

LUMEL S.A.  
ul. Sulechowska 1  
65-022 Zielona Góra  
POLAND  
[WWW.LUMEL.COM.PL](http://WWW.LUMEL.COM.PL)


## SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Installation category	III up to 300 V (II for 300 ... 600 V)	acc. to EN 61010-1
Pollution grade	2	
Phase-to-earth operating voltage	- for the supply circuit: 300 V, - for the measuring input 600 V – category II (300 V – category III)	

## CONNECTION DIAGRAM

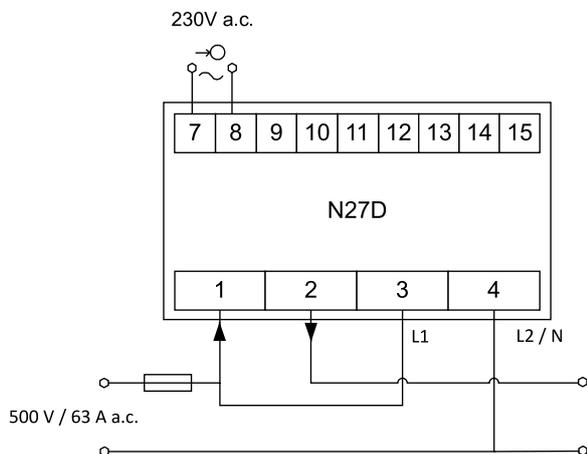

## EXTERNAL DIMENSIONS

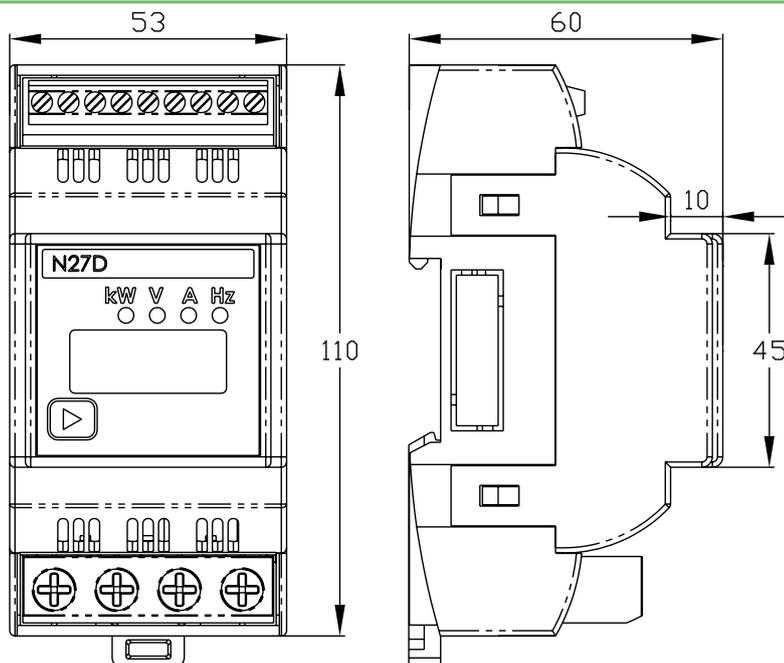

## ORDERING

	N27D - XX	X	X
<b>Version:</b>			
standard	00		
custom-made*	XX		
<b>Language:</b>			
Polish		P	
English		E	
other*		X	
<b>Acceptance tests:</b>			
without extra quality requirements			0
with an extra quality inspection certificate			1
acc. to customer's request*			X

### ORDERING EXAMPLES:

Code: **N27D - 00 E 0** means:

- N27D** - rail mounted digital meter
- 00** - standard version
- E** - English language,
- 0** - without extra quality inspection requirements.

\* - after agreeing with the manufacturer

For more information about LUMEL's products please visit our website:  
[www.lumel.com.pl](http://www.lumel.com.pl)

**Export department:**  
+48 68 45 75 139/ 321/ 368  
Fax: +48 68 32 54 091  
e-mail: [export@lumel.com.pl](mailto:export@lumel.com.pl)

LUMEL S.A.  
ul. Sulechowska 1  
65-022 Zielona Góra  
POLAND  
**WWW.LUMEL.COM.PL**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Panel Meters](#) category:*

*Click to view products by [LUMEL](#) manufacturer:*

Other Similar products are found below :

[M00558-00](#) [01.098.1658.1](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86427-26](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [25.350.0553.0](#) [20046-20](#) [20182-23](#) [AP1020](#) [AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#) [28000-03](#) [K3GN-NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [MV15-DC-20V-110V-CU](#) [HB8260R4890](#) [20125-21](#) [86640-00](#) [2CMA100166R1000](#) [N27D 00M0](#) [DMG 100](#) [DMG 110](#) [DMG 800 L01](#) [DMK 01](#) [DMK 01 R1](#) [DMK 11](#)