

ELECTRO-OPTICAL CHARACTERISTIC TA=25°C PER SMD-LX0707RGB-TR DIGITAL LED

PARAMETER		MIN	TYP	MAX	UNITS	TEST COND
SUPPLY VOLTAGE	VDD	-	5	-	V	-
INPUT VOLTAGE(HIGH)	VIH	0.7VDD	-	VDD	V	-
INPUT VOLTAGE(LOW)	VIL	0	-	0.3VDD	V	-
PEAK WAVELENGTH	R	-	630	-	nm	If=5mA
	G	-	520	-		
	B	-	470	-		
LUMINOUS INTENSITY	R	72	-	180	mcd	If=5mA
	G	180	-	360		
	B	28.5	-	72		
VIEWING ANGLE		-	120	-	2x theta1/2	If=5mA

PIN ASSIGNMENT


PIN #	COLOR	SYMBOL
1	RED	VDD
2	BLACK	VSS
3	BLUE	DIN
4	YELLOW	NC

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}/_{-0.00} MAX= ^{+0.00}/_{-DECIMAL PRECISION}

RECOMMENDED OPERATING CONDITION Ta=-20~70°C , VSS=0V

PARAMETER		MIN	TYP	MAX	UNITS	TEST COND
PROPAGATION DELAY TIME	TPLZ	-	-	300	ns	DIN→DOUT CL=15pF, RL=10KΩ
FALLING TIME	TTHZ	-	-	20	us	CL=300pF OUTR/OUTG/OUTB
INPUT CAPACITOR	Tci	-	-	15	pf	

TIMING WAVE FORM

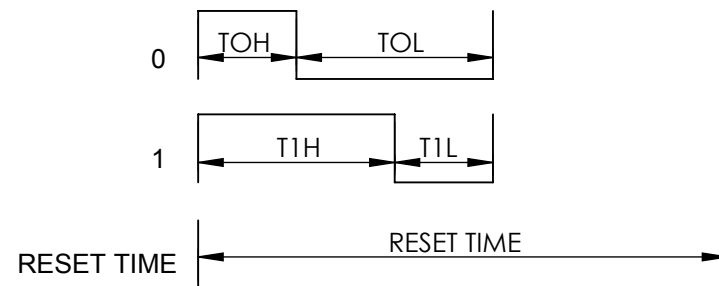


HIGH SPEED MODE

ITEM	DESCRIPTION	TYP.	ALLOWANCE
T _{0H}	0 CODE, HIGH-LEVEL TIME	300ns	±80ns
T _{0L}	0 CODE, LOW-LEVEL TIME	900ns	±80ns
T _{1H}	1 CODE, HIGH-LEVEL TIME	900ns	±80ns
T _{1L}	1 CODE, LOW-LEVEL TIME	300ns	±80ns
RES	RESET TIME	>50us	-

DATA COMMUNICATION



SINGLE DATA IN 24BIT FOR RGB

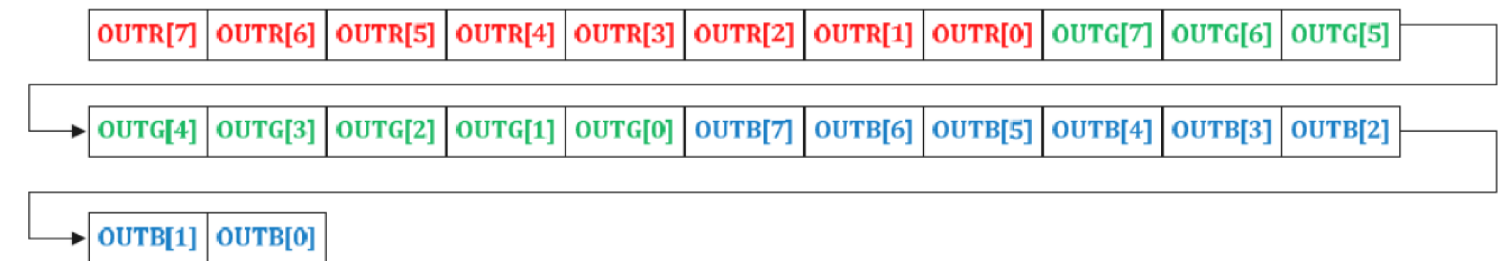

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}/_{-0.00} MAX= ^{+0.00}/_{-DECIMAL PRECISION}

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lumex manufacturer](#):

Other Similar products are found below :

[SSI-LXW06DNS-Y](#) [SSI-LXW06DNS-I](#) [SML-LXL1209USBC-TR](#) [SSL-LX305F4SRD](#) [SSF-LXH555USBW](#) [SSL-LX20583ID-FT](#) [SSL-LX20R6ID](#) [SSI-LXH9ID-150](#) [LCM-S02002DSF](#) [SSP-8FE272UP120](#) [SSF-LXH100LYD](#) [SML-LXFT1206SOC-TR](#) [LDM-768-1LT-Y1](#) [LDM-768-1LT-R4](#) [LDM-768-1LT-G4](#) [SSP-LXS110818BA](#) [LDQ-N512RI](#) [LDS-M512RI-RA](#) [SSL-LX2573SUGD](#) [SSI-LXH387ID](#) [SSF-LXH305GD-TR](#) [SSF-LXH109SISUGW](#) [LDM-6432-P5-BLE4-1](#) [SML-LXFT0805SYC-TR](#) [SSF-LXH25780ID](#) [SSP-1157B156U12](#) [LDD-A5642RI](#) [LDF-C5612RI](#) [SSL-LX80113GD](#) [LDS-C514RI](#) [LDS-C816RI](#) [LCM-S02402DSR](#) [LDT-A512RI](#) [SSP-8FE276U120](#) [SSF-LXH104ID-5V](#) [SSL-LX2559D3HD](#) [SSI-LX3054IGW-150](#) [LCM-S24064GSF](#) [SMR-6656-24-RGB-UR](#) [LDS-C406RI](#) [SSF-LXH240LYYD](#) [SSP-LB12MW024K03](#) [LCM-H01601DSR](#) [SSL-LX3054YD-12V](#) [SSL-LX30FT4IGW](#) [SSF-LXH100LID-01](#) [LDQ-M516RI](#) [SSF-LXH400YD](#) [LDD-C403NI](#) [LDM-968-P3-UR](#)